



No.6,Zhongwu Industry zone,Hengshan village,
Shipai town,Dongguan city,
Guangdong Province

Tel.:0086 769 8139 6228
Fax.:0086 769 8655 1286

sales@diamanlight.com

www.diamanlight.com



Diamond-like quality and brilliance
Let us experience the charm of light

2023-2024






Diaman, originated from "diamond", means "with diamond-like quality and brilliance". Let us experience the charm of light.

Diaman Lighting Co., Ltd. specializes in the research & developing of high quality LED lighting products.

With continuous innovation, the products become more mature in performance and aesthetic.

With all products certified by CE, RoHS, SAA, etc, We are selling to tens of countries worldwide.

Now Diaman enjoys a good reputation in lighting industry and is welcomed by lots of customers.

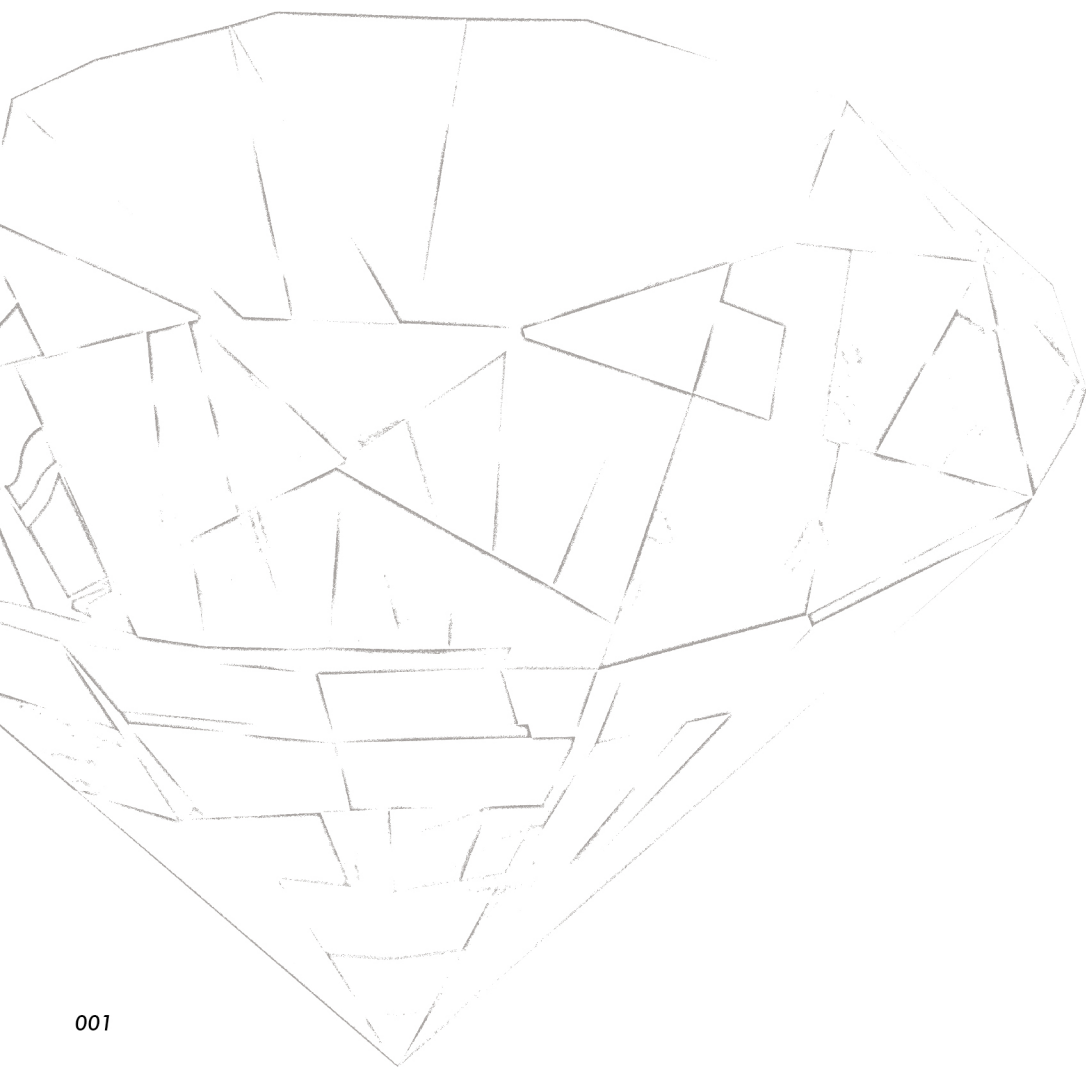

Symbols



-  Class I - IEC protection class
-  Class II - IEC protection class
-  Class III - IEC protection class
-  Protection class (IEC 60529) against foreign bodies and water
-  European Conformity
-  The Restriction of the use of certain hazardous substances in electrical and electronic equipment
-  Standards Association of Australian
-  Device suitable to be mounted on normally flammable surfaces (EN 60598)
-  Device suitable to be mounted on furniture
-  VISUAL COMFORT
Ensured by a low glare system
-  CRI > 85, CRI 93 be option
High colour rendering index
-  REFLECTOR
Reflector diffuse emission
-  Dimmable
-  Pure Aluminum
heat dissipation system
-  Quick connector
-  ECO Energy Saving
-  Quadrangular installation hole
-  Round installation hole
-  Tilting light beam
-  Warranty **5** years





Appearance

It indicates the outlook of the whole finished fixture. Visible Integrity, the harmony as a whole, beauty of lamp front, gap less than 1mm between front and body as well as heatsink, other key points as shape of reflector and lens, zero defectiveness on surface painting etc., are all required to match the lamp design and style perfectly.

Electrical


General principle, Engineers must be responsible for the whole fixture, as well as every aspect of the electrical, selecting the appropriate drivers by its working environment, additional requirement whether water proof, strain relief, flicker-free, dimming performance ect.

1. For temperature of normal driver for indoor use, Ta ranges from -20-45 °C, Tc 80 °C, and Ta -20-50 °C, Tc 85 °C when covered by insulation material.
2. Flickering, a flicker-free test report is required from suppliers. Standards: the depth of imperceptible fluctuation is 0.288% when less than 9Hz, 0.032% when between 9-3120 Hz.
3. Dimming test, A dimming test report must be submitted by supplier for a new driver according to the target market and dimmers used. Engineers much test in person and prepare report, to a target dimming range from 3 to 100%.



Structure

As a lamp, the key of a good structure is to fulfill the function that pre-designed, for an easy and quick installation, also efficient mass production.

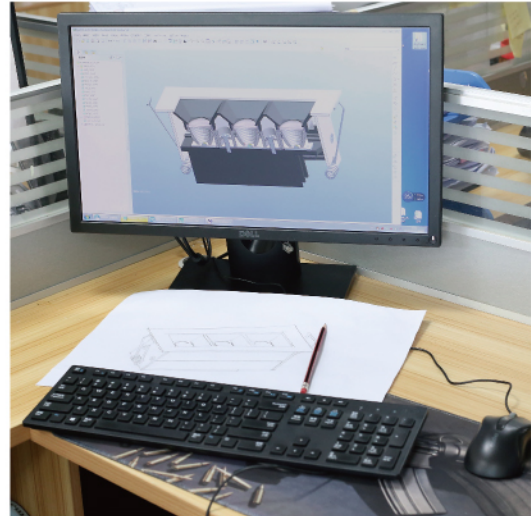

Concept of Diaman Design


Production of heathy and eco-friendly light, warming every corner of life, is the core concept of Diaman design. By the spirit of professional and focus, Diaman creates aesthetical, comfortable, safe and energy-saving lighting environment, by supplying the optimal solution of lighting to customers. For every new product, Diaman is devoted for the perfection in appearance, optical and function, with the pursuit as a craftsman.

Thermal management

Most of the electricity was converted into heat when LED is lighted up and causing the temperature of lamp rising, while thermal management is a critical factor which determines the lifespan of a LED lamp. We have a strict standard to control the temperature,

Standard: The Tc temperature should be less than 83° C for international brand (Citizen, Sharp, Bridgelux, Cree), working with heatsink covered by cap or insulation material, and an external driver connected. Of the part can be touched by hand, the temperature should not exceed 65° C no matter how is the ambient.

Normally, the temperature difference between TC point and heatsink base should not exceed 5° C, or it's judged as poor thermal conductive. All above values are from our laboratory.

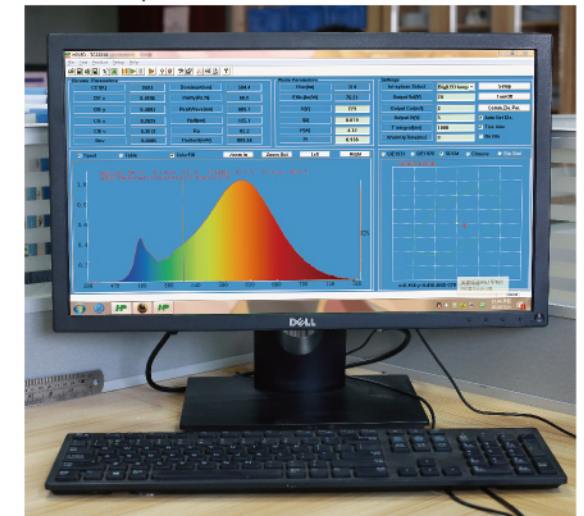

Optical

For optical, it's the light that can be perceived and seen by human eyes when lighted on. As the core of a lamp as Diaman deems, the light which must be comfortable, eco-friendly and warm, is the soul of the whole fixture.

The standards mainly focus on distribution curve, lumen, CCT, CRI, SDCM, UGR, beam angle, and the interpretation of IES& Sphere testing report.

1. Distribution, there are 2 variants of direct illumination and wall washer. The light transition should be even, no obvious shadow or patterns, when lighted up from 0.5m away. Only 2 circles of light are acceptable when wall washing, one with obvious ending circle and another with main beam, rejected when more occurring. The best performance of wall washing by a lens, is a noticeable curve and fading out gradually at edge, no obvious harsh circle. Illustration as below,
2. Light efficiency, namely lumen per wattage, shortened as lm/W. Normally, 100lm/W is the target for an ordinary downlight at CRI>80, 90lm/W is the bottom line.
3. Colour rendering index, as CRI or Ra. According to latest EU ERP directives, the least CRI should be above 80. Also 90, 95 and 97 etc available, the higher value, the greater ability to restore objects to the natural colours.
4. SDCM, the current EU ERP regulates the value < 6 steps of whole fixture, Diaman accept 3 step for light sources.
5. Unified Glare Rating (UGR), the normal value <19 for normal downlights, while <16 for hotel lamps.



Safety approval

Safety means the conformity of safety regulations of local market. The certification of key components must be complete, such as CE/SA/VDE/UL/ROHS etc.

General principle, mainly item number of lamp, internal and external structure must abide by the safety regulations. For example, item number, creepage distance, strain relief etc should be strictly complied with.



IP Code Introduction

IP20

Solids,first digit

- IP0X** No protection
- IP1X** Protect against solid bodies of dimensions>50mm
- IP2X** Protect against solid bodies of dimensions>12.5mm
- IP3X** Protect against solid bodies of dimensions>2.5mm
- IP4X** Protect against solid bodies of dimensions>1.0mm
- IP5X** Protect against the dust (Ingress of dust is not entirely prevented)
- IP6X** Completely protect against the dust(No ingress of dust)

Liquids,second digit

- IPX0** No protection
- IPX1** Protect against dripping water
- IPX2** Protect against dripping water when tilted up to 15°
- IPX3** Protect against spraying water when tilted up to 60°
- IPX4** Protect against spraying water(any direction)
- IPX5** Protect against water jets(any direction)
- IPX6** Protect against powerful water jets(Water projected in powerful jets.Against the enclosure from any direction shall have no harmful effects)
- IPX7** Protect against effect of temporary immersion in water(Ingress of water in harmful quabty shall not be possible when the enclosure is immersed in water under defined condiiyons of pressure and time)
- IPX8** Protect against effect of continuous immersion in water(Ingress of water in harmful quabty shall not be possible when the enclosure is immersed in water under defined condiiyons of pressure and time)

48V TRACK LIGHT ACCESSORIES



 DG-111 Page: 021	 DG-112 Page: 021	 DG-113 Page: 021	 DG-114 Page:021	 DG-115 Page: 021	 DG-116 Page: 021
 DG-117 Page: 021	 DG-118 Page: 022	 DG-119 Page: 022	 DG-120 Page: 022	 DG-121 Page: 022	 DG-122 Page: 022
 DG-123 Page: 022	 DG-124 Page: 022				


TRACK LIGHT ACCESSORIES



 DG-001/DG-002 Page: 025	 DG-007/DG-008 Page: 025	 DG-009/DG-010 Page: 025	 DG-011/DG-012 Page: 025	 DG-004/DG-005 Page: 025	 DG-006 Page: 025
 DG-013 Page: 025	 DG-014 Page: 026	 DG-003 Page: 026	 DG-095 Page: 026	 DG-096 Page: 026	
 DG-097 Page: 026	 DG-098 Page: 026	 DG-099 Page: 026	 DG-100 Page: 026	 DG-101 Page: 026	

APPO


1. 48V TRACK LIGHT * APPO.A

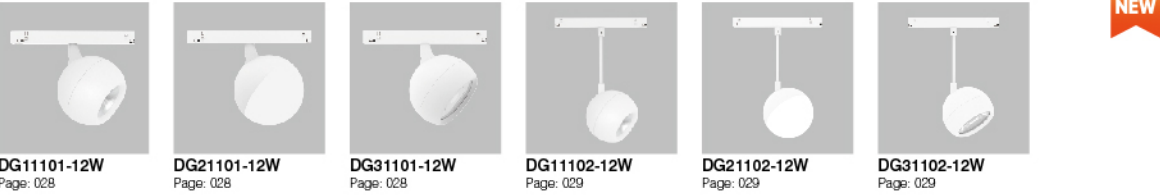


2. TRACK LIGHT * APPO.B



3. CEILING RECESSED LIGHT * APPO.C

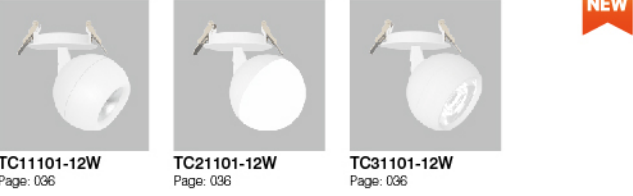


4. SURFACE MOUNTED* APPO.D

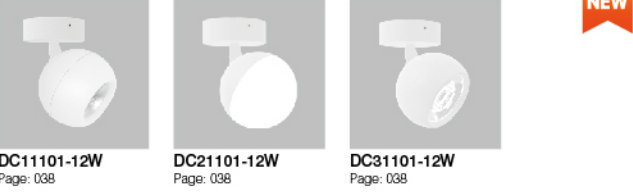


MIRRO

1. 48V TRACK LIGHT * MIRRO

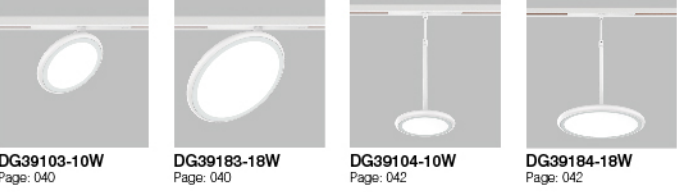


2. TRACK LIGHT * MIRRO

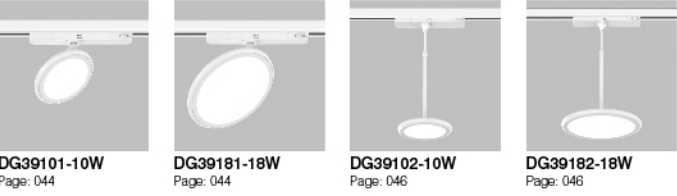

3. CEILING RECESSED LIGHT * MIRRO




4. OLIGO LIGHT



5. SURFACE MOUNTED * MIDO



1. 48V TRACK LIGHT * STENA

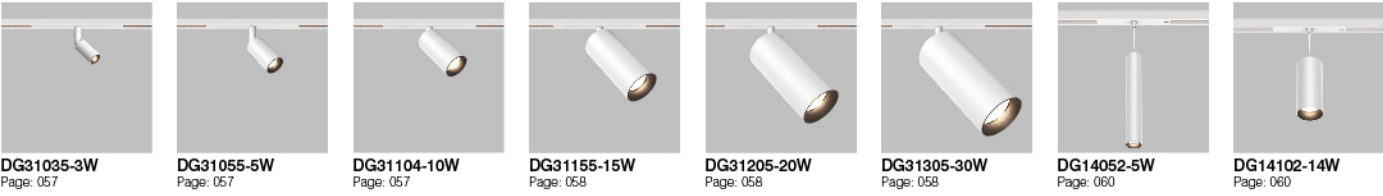

2. 48V TRACK LIGHT * MAGGIE




3. 48V TRACK LIGHT * SALINE



1. TRACK LIGHT * STENA




2. TRACK LIGHT * AURA

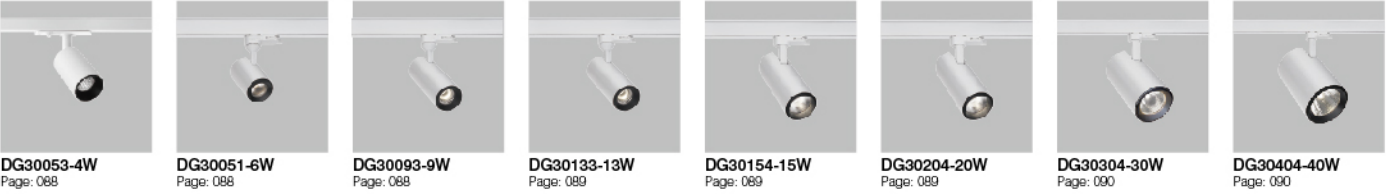

3. TRACK LIGHT * LUNAR



4. TRACK LIGHT * SLIM

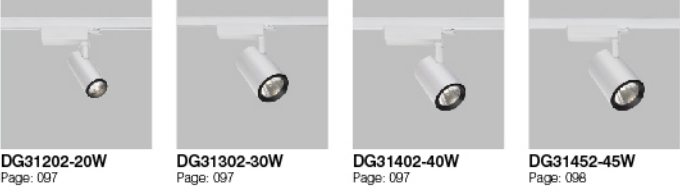

5. TRACK LIGHT * ABU




CEILLING RECESSED LIGHT

1. CEILLING RECESSED LIGHT * TUNA



OLIGO LIGHT

1. OLIGO LIGHT * ZIRO

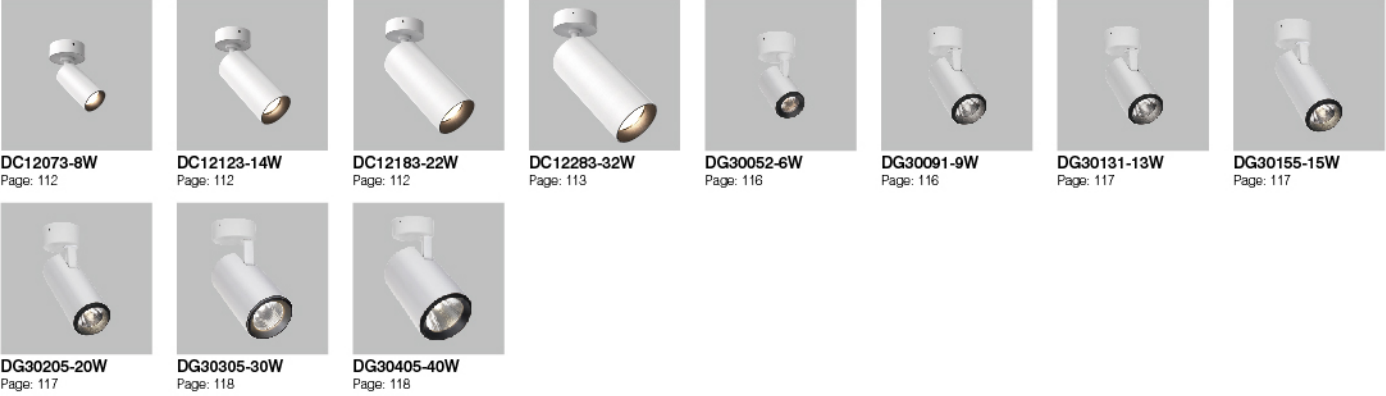

2. OLIGO LIGHT * PENDENT



LED RECESSED DOWN LIGHT FOR HOTEL

1. LED RECESSED DOWN LIGHT FOR HOTEL* Tank




NEW


2. LED RECESSED DOWN LIGHT FOR HOTEL * AGATE




3. LED RECESSED DOWN LIGHT FOR HOTEL * TUNA

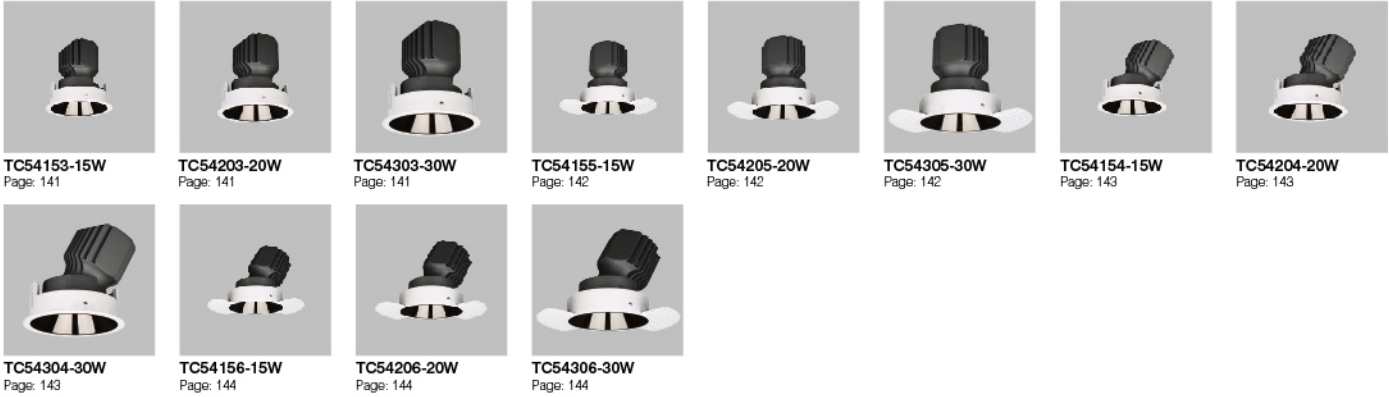


4. LED RECESSED DOWN LIGHT FOR HOTEL * VEGA

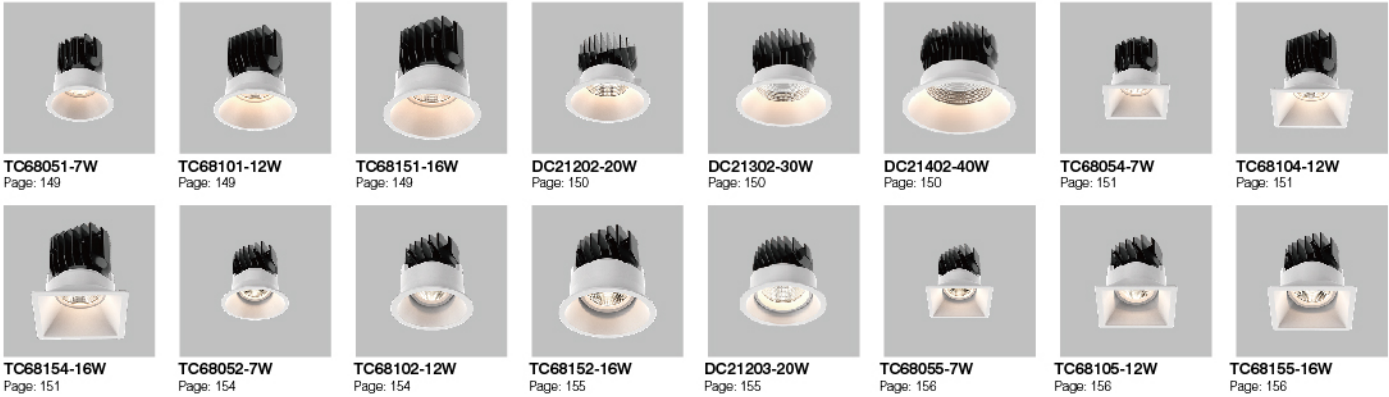

5. LED RECESSED DOWN LIGHT FOR HOTEL * MEGA

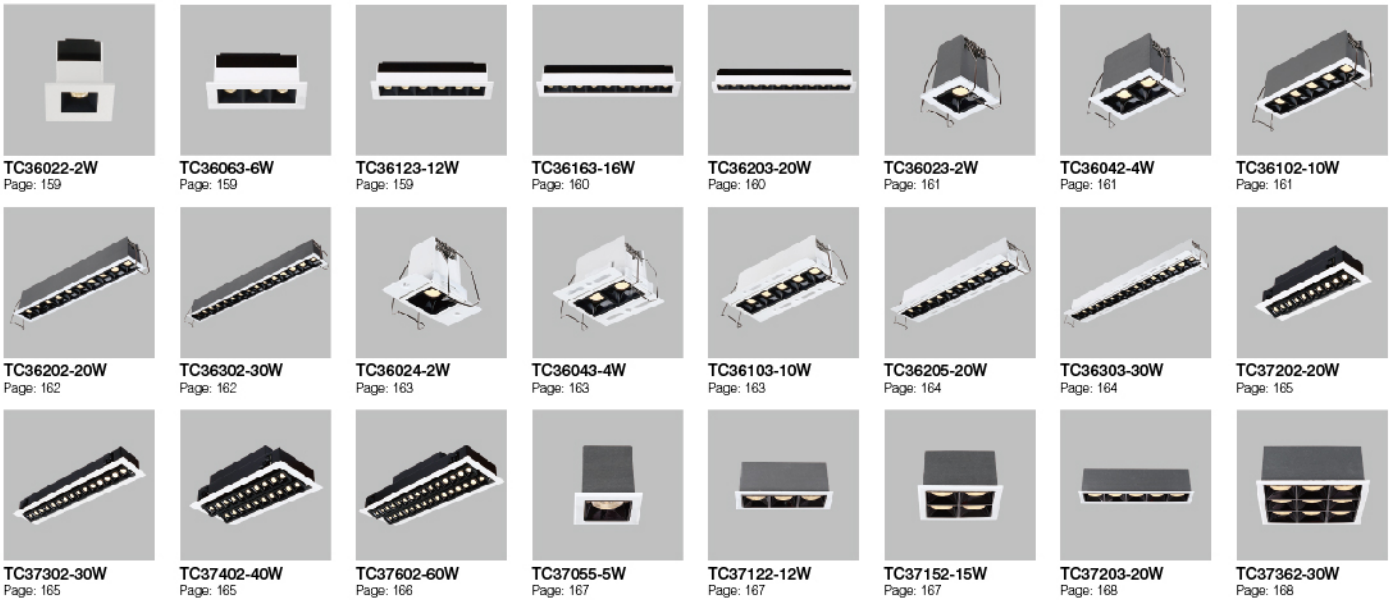

6. LED RECESSED DOWN LIGHT FOR HOTEL* FINO

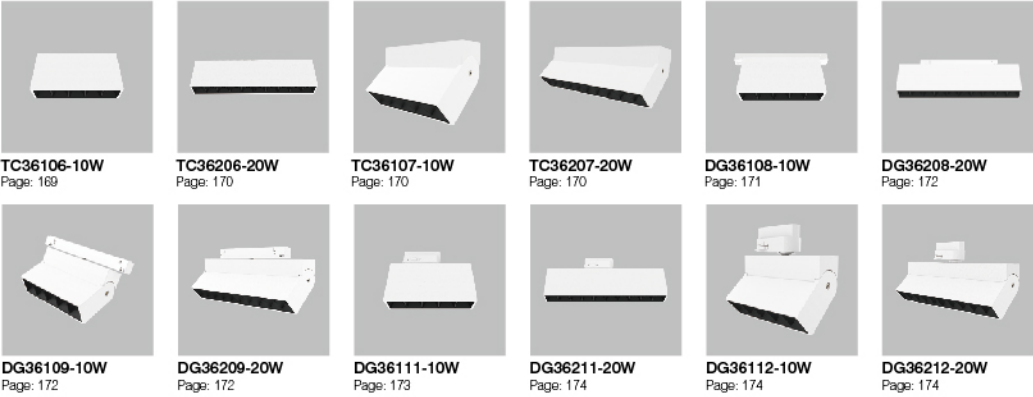


LED RECESSED DOWN LIGHT FOR LIVING ROOMS

1. LED RECESSED DOWN LIGHT FOR LIVING ROOMS * M.ART



2. LED RECESSED DOWN LIGHT FOR LIVING ROOMS* DIRO

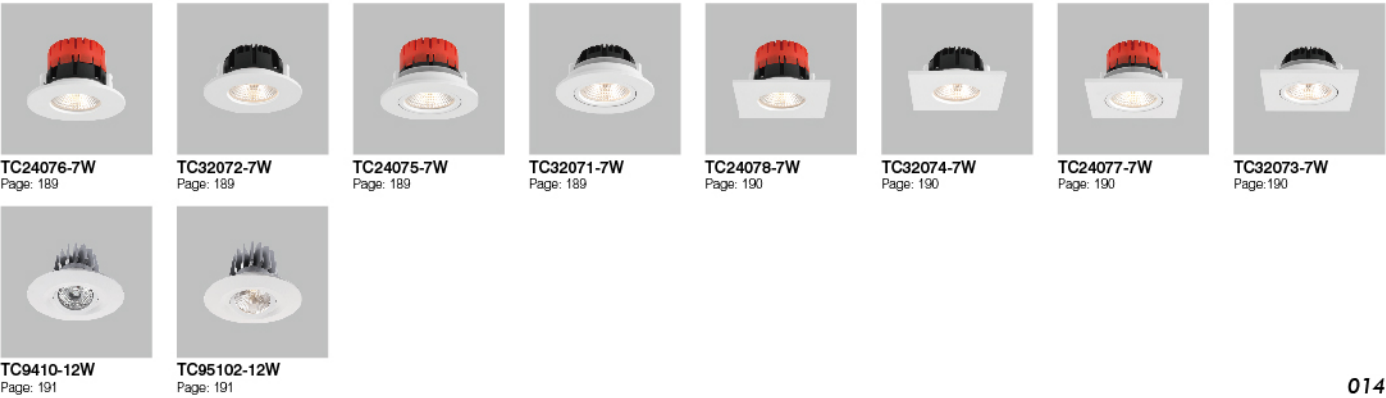

3. LED RECESSED DOWN LIGHT FOR LIVING ROOMS * AQUA IP65



4. LED RECESSED DOWN LIGHT FOR LIVING ROOMS * MOON




5. LED RECESSED DOWN LIGHT FOR LIVING ROOMS * V-ILLUMI



6. LED RECESSED DOWN LIGHT FOR LIVING ROOMS * MINI




7. LED RECESSED DOWN LIGHT FOR LIVING ROOMS * CABINET

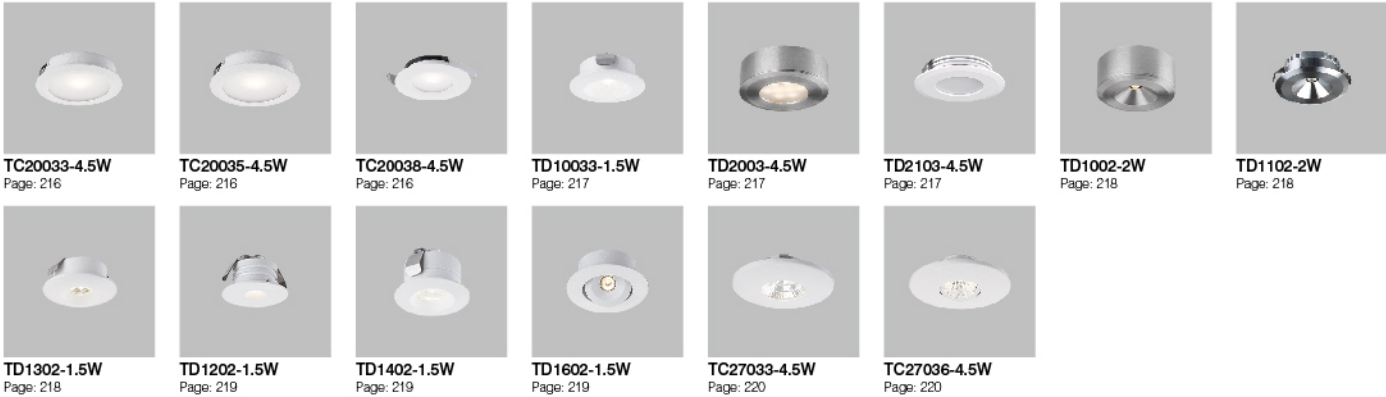

STORE & RESTAURANT LIGHTING


1. STORE & RESTAURANT LIGHTING * DIAMONT

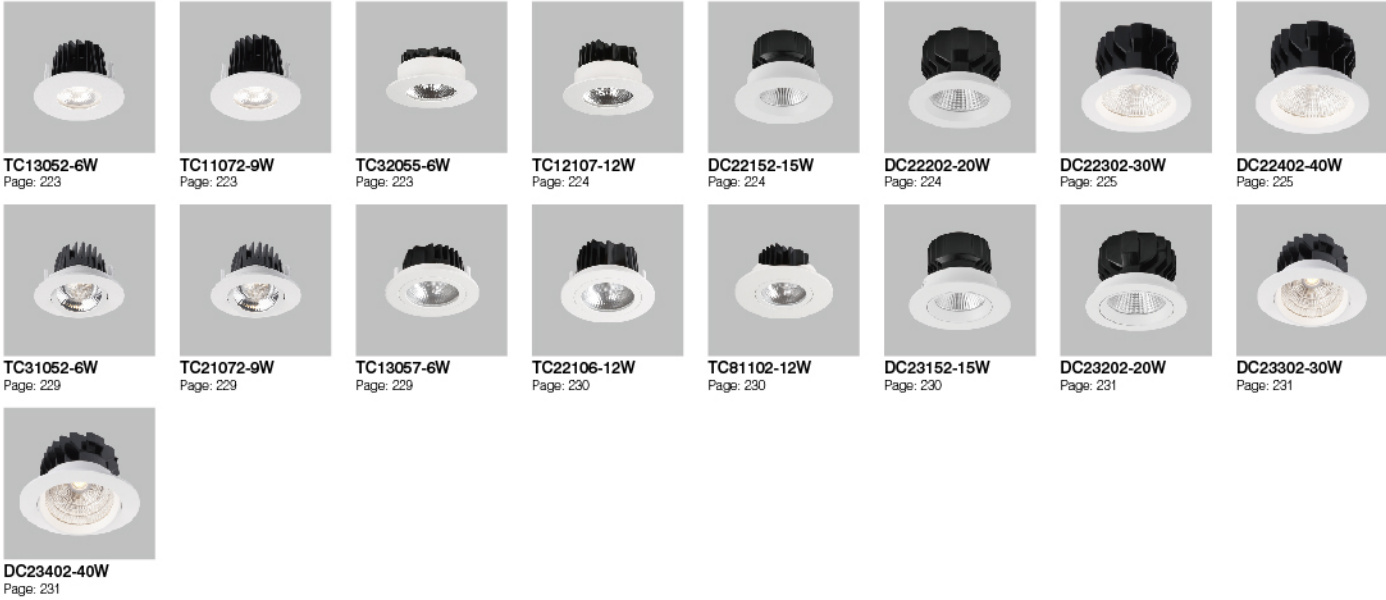

2. STORE & RESTAURANT LIGHTING * SIRUS



3. STORE & RESTAURANT LIGHTING * MERCUCY

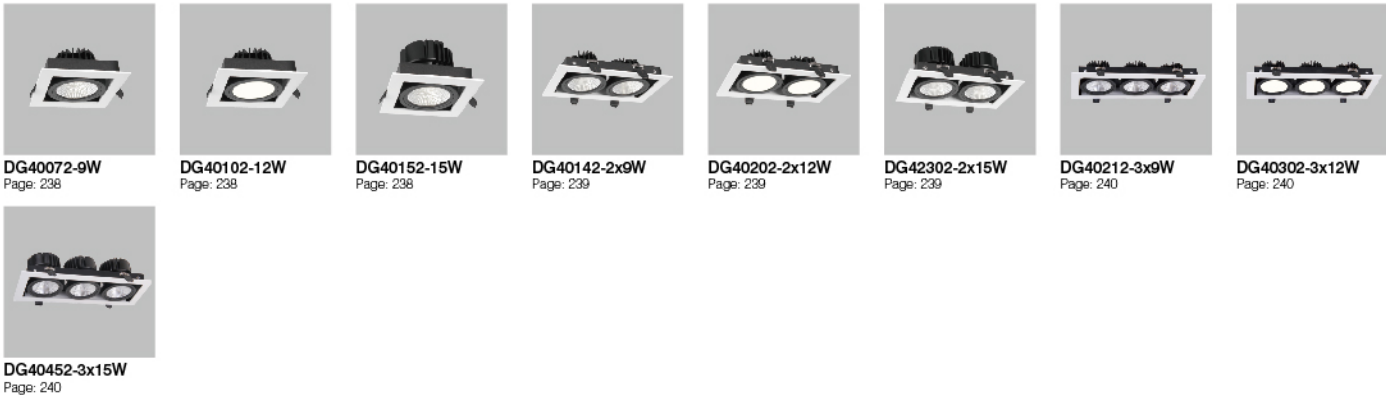


4. STORE & RESTAURANT LIGHTING * PLUTO




SURFACE MOUNTED

1. SURFACE MOUNTED * ROMA

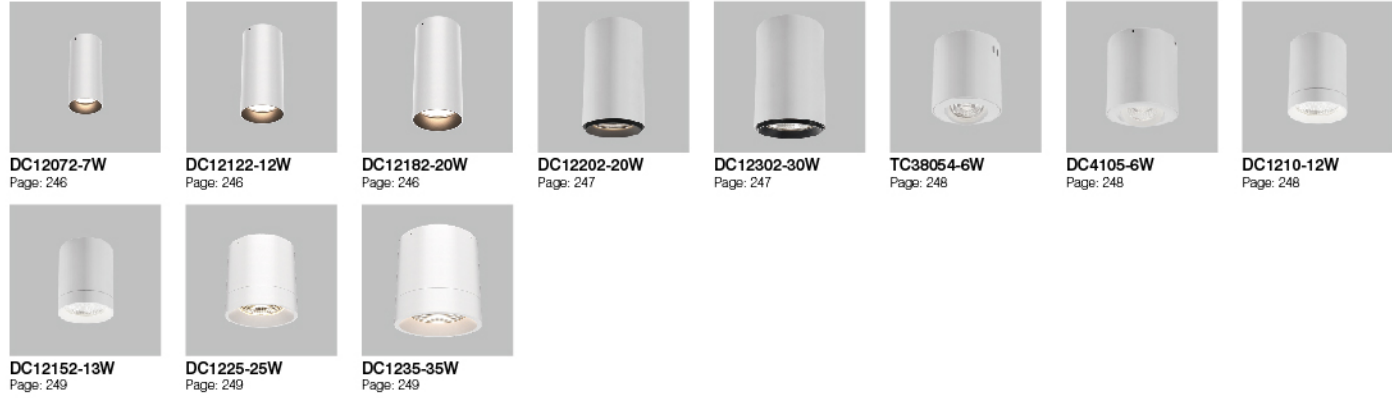

2. SURFACE MOUNTED * IMAN




OFFICE LIGHTING

1. OFFICE LIGHTING * LEOS




2. OFFICE LIGHTING * CCT DIM

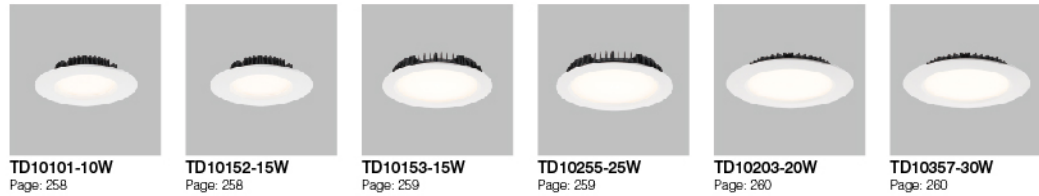

3. OFFICE LIGHTING * CCT DIM



4. OFFICE LIGHTING * PANEL CCT CHANGING

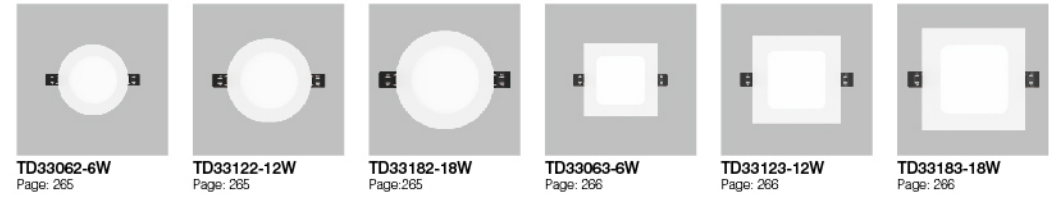

5. OFFICE LIGHTING * SLITE



FIRE RATED LIGHTING


1. FIRE RATED LIGHTING * LURI-FIRE



2. FIRE RATED LIGHTING * DURA-FIRE




3. FIRE RATED LIGHTING * CLASSIC-FIRE

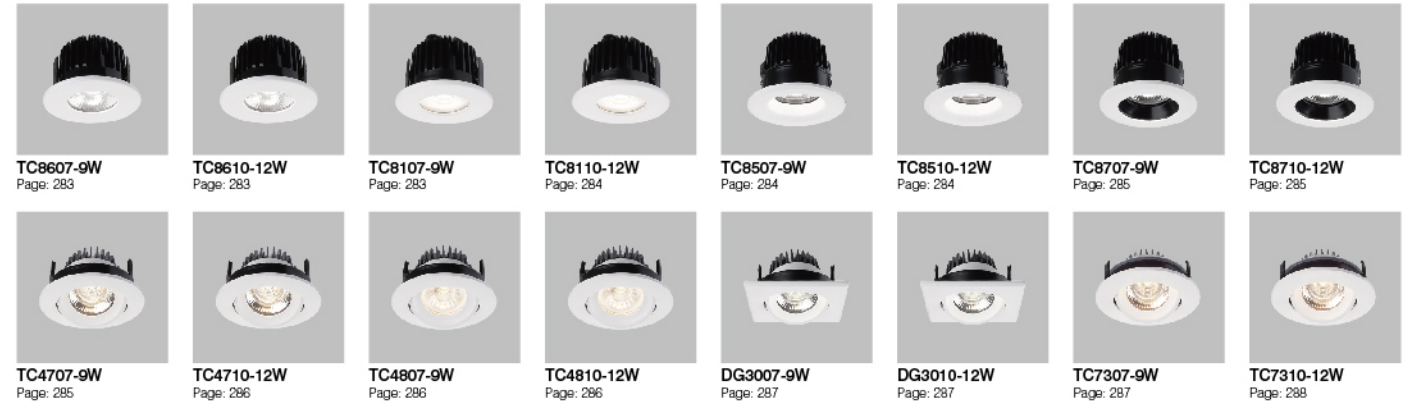



STAIR LIGHTING

1. STAIR LIGHTING



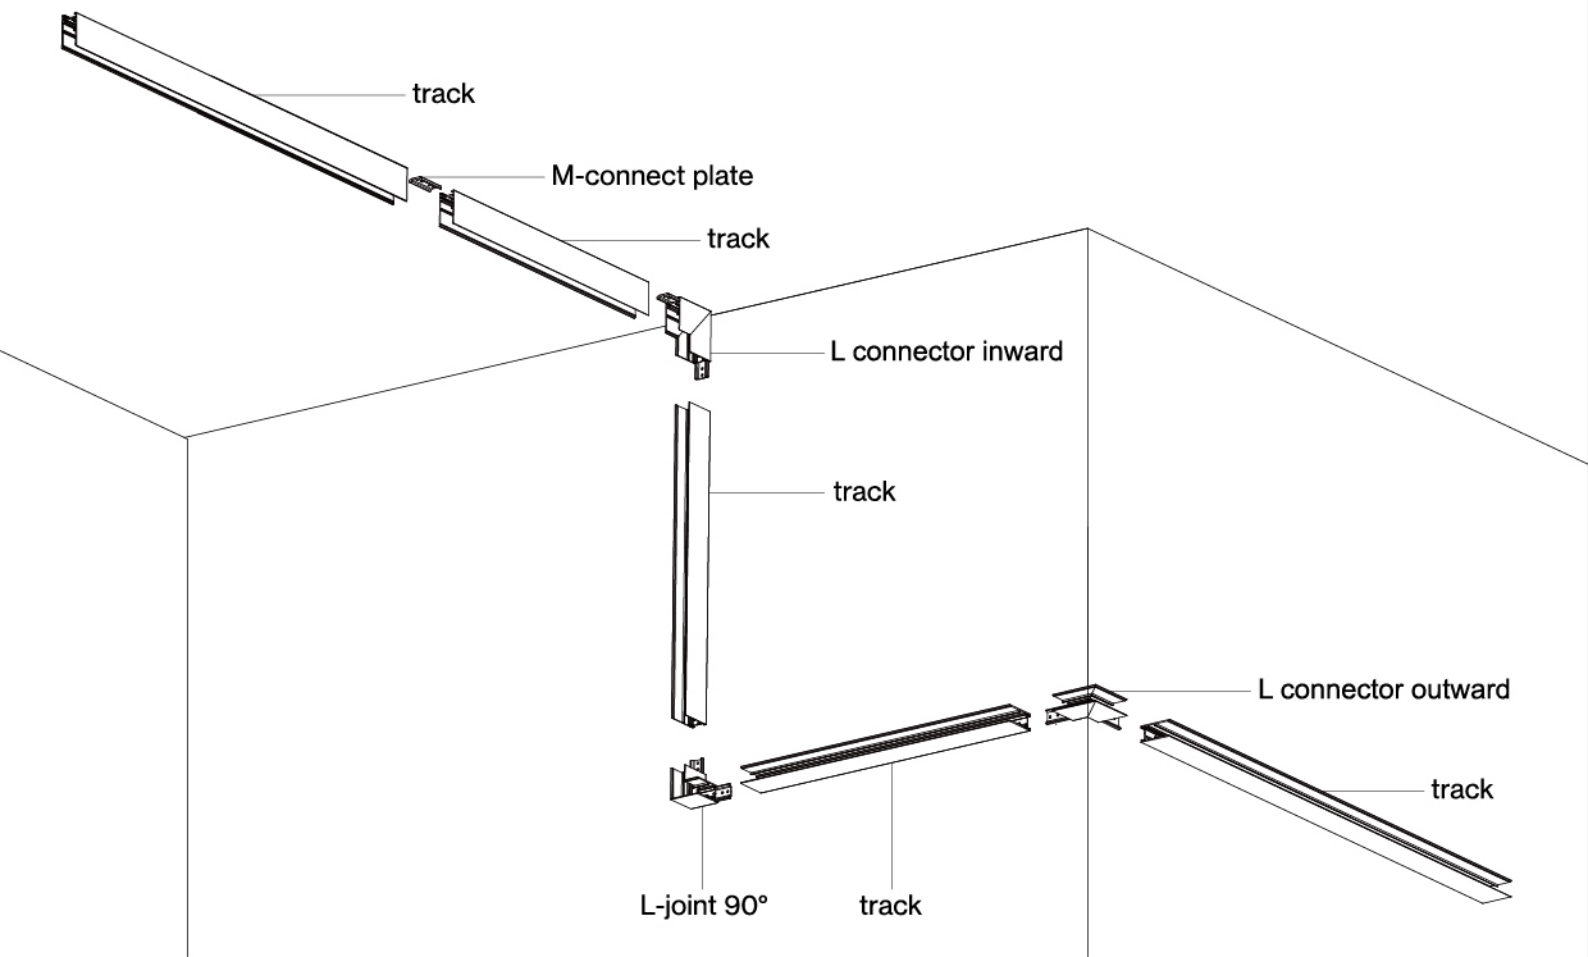

Standard 4 conductors track

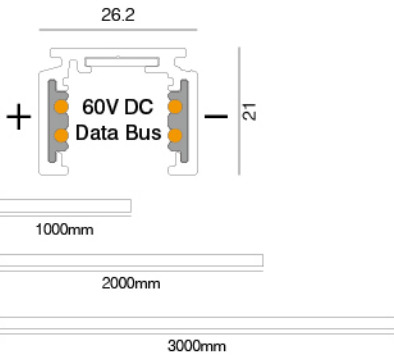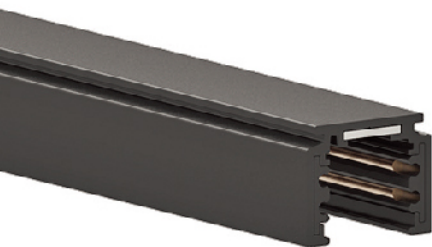


DG-105

DG-106

DG-107

Trimless 4 Conductors Track

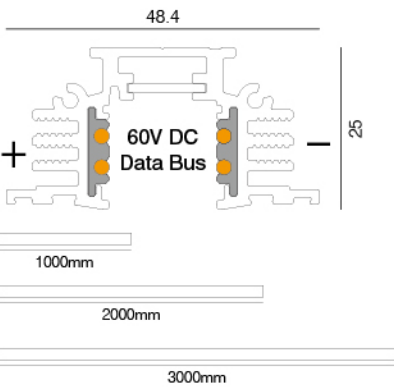


DG-108

DG-109


DG-110

Load Scheme

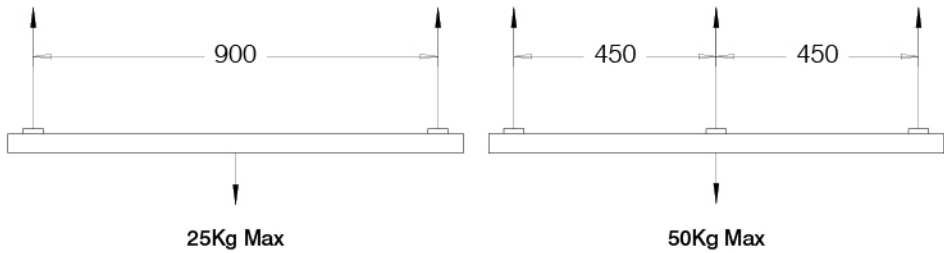


For standard versions

Load Scheme

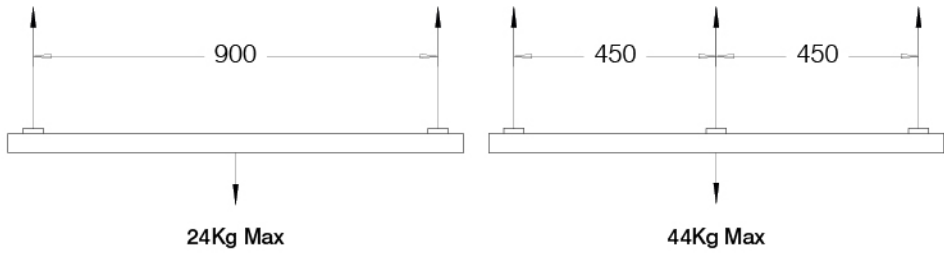






For trimless versions











2 different modes for the 4 conductors track:


- 2 different power supplies (2 circuits, 0 – 60V DC)
- 1 circuit for 60V DC and 1 circuit for Data Bus

48V TRACK LIGHT ACCESSORIES

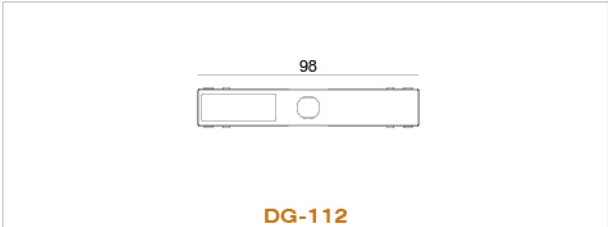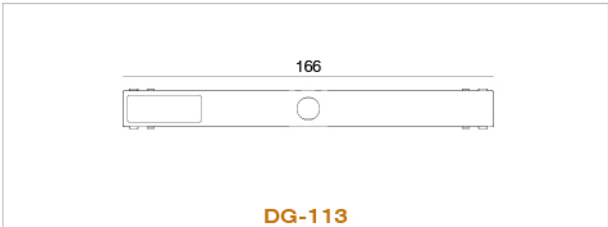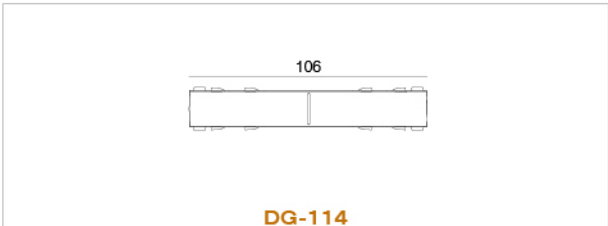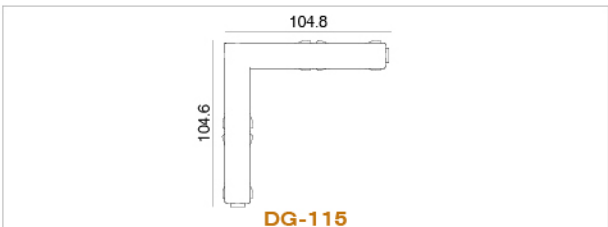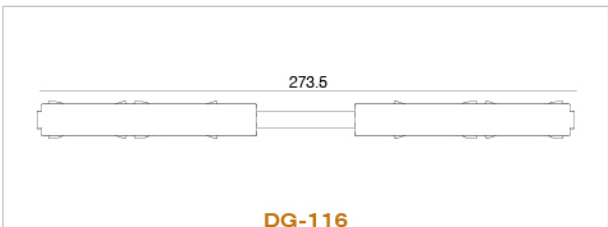
Short end-feed		 111.7 DG-111
Magnetic short single spot adapter		 98 DG-112
Magnetic single spot adapter		 166 DG-113
Jointing connector		 106 DG-114
L feed		 104.8 104.6 DG-115
Flexible verbinder adjustable corner		 273.5 DG-116
Short bracket for suspensions		 26.2 35 DG-117

48V TRACK LIGHT ACCESSORIES

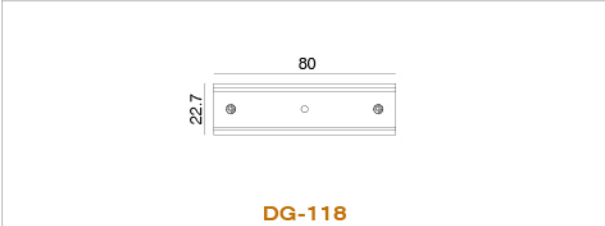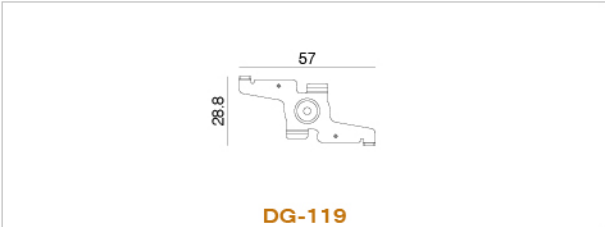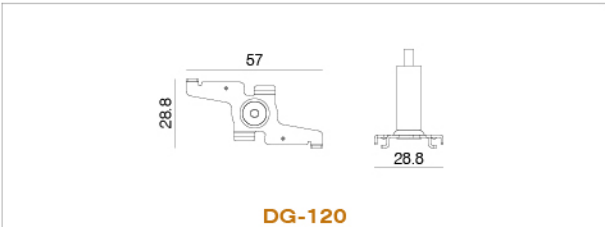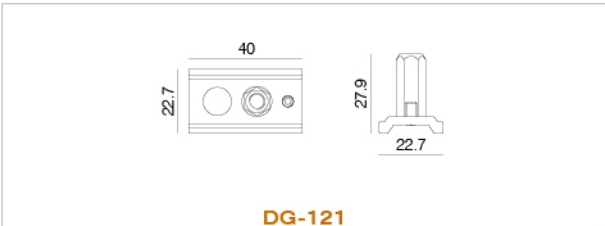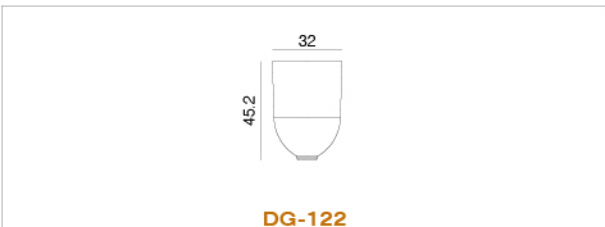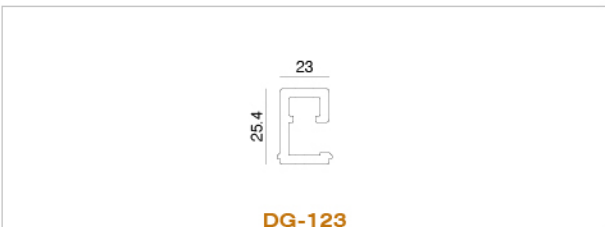
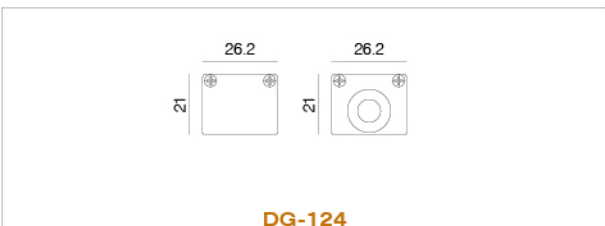
Bracket for "in row" use junction		 80 22.7 DG-118
Track fast fixing clamp		 57 28.8 DG-119
Fast fixing clamp with gripper		 57 28.8 28.8 DG-120
Short bracket for suspensions		 40 22.7 27.9 22.7 DG-121
Plastic cup for steel cable ø 1,5 mm		 32 45.2 DG-122
Ceiling bracket for suspensions		 23 25.4 DG-123
End caps		 26.2 26.2 21 DG-124

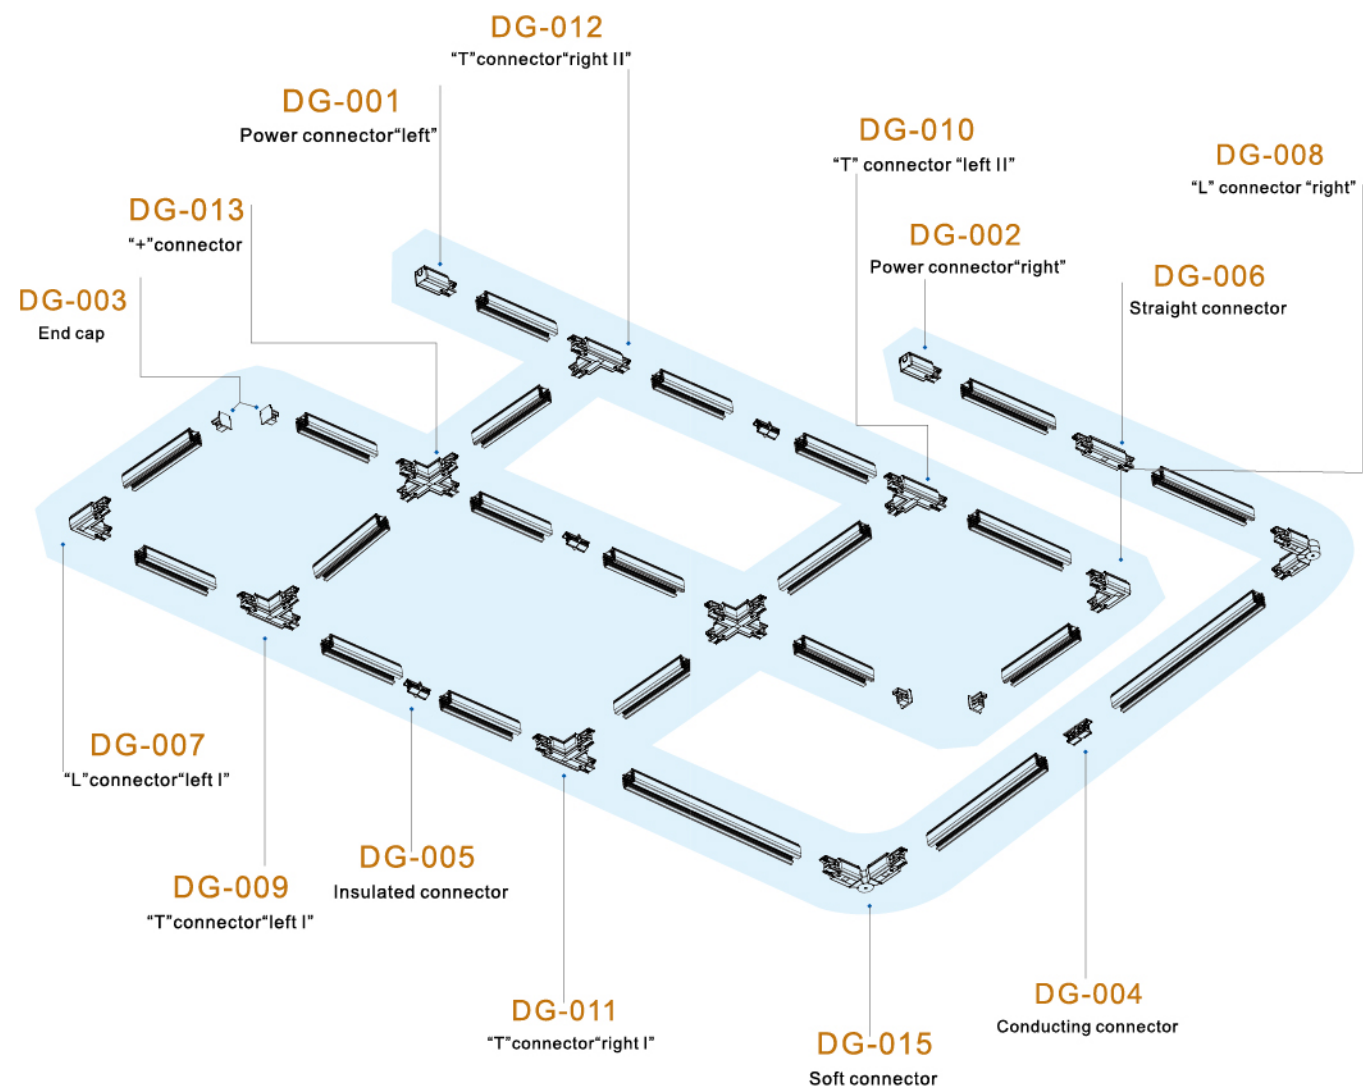

3-circuit surface track

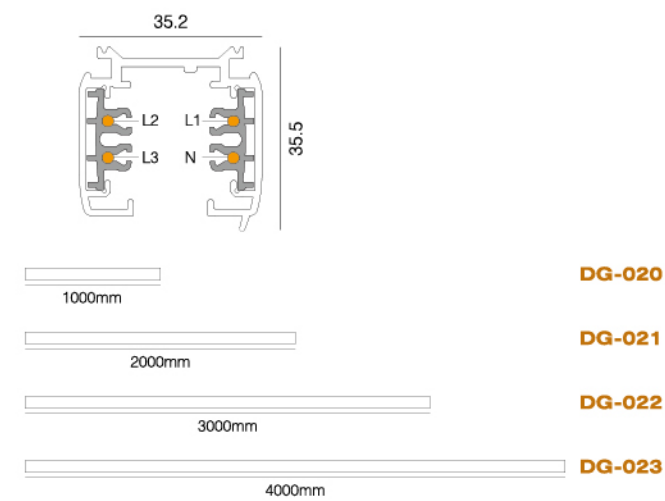


3-circuit recessed track

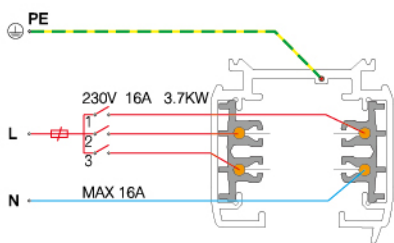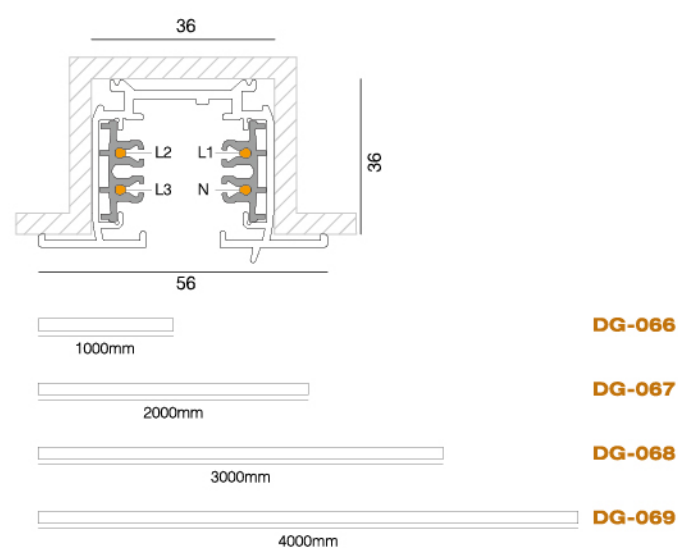

1-Circuit

For this type of connection, the 3-circuits on the entire track are controlled through one switch.

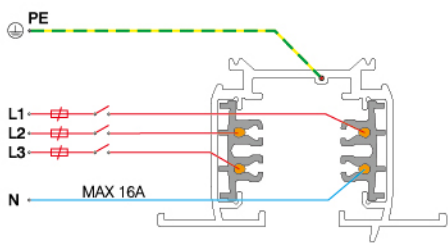

3-Circuit

For this type of connection, each circuit is controlled through one switch.

TRACK LIGHT ACCESSORIES

Track accessories example

The track can be arranged in linear, L-shaped, square forms and other geometric, by using L-connectors, T-connectors, Cross connectors and Flexible connectors with a few track connectors, the tracks can be arranged into different patterns as required by customers, to meet different illumination requirements and achieve desired lighting effects. Diaman track system complies with CE standards.

Live-end connector to start a run

"L" connector to connect two track sections at a 90 angle.


"T" connector to connect three track sections into a T configuration.

"T" connector to connect three track sections into a T configuration.

Mini joiner A low profile connector to join two straight track sections end-to-end

Straight connector to connect two track sections end-to-end. It provides a center feed option.

"+" connector to connect four track sections into a cross configuration.

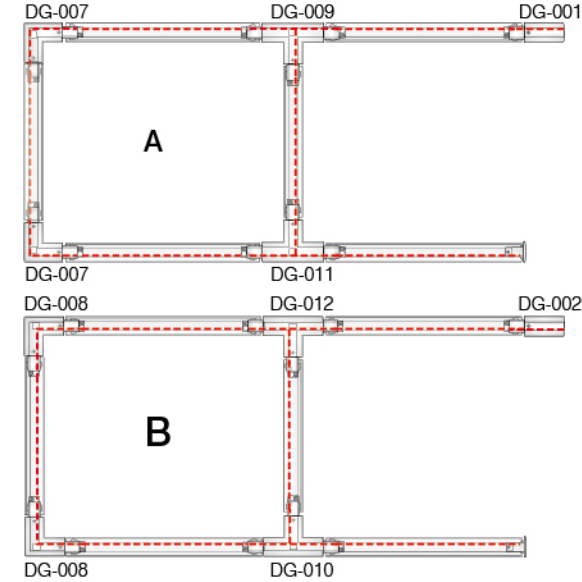

TRACK LIGHT ACCESSORIES

Flexible connector to connect two track sections at any angle up to 90 degrees or wall ceiling or pitched ceiling application.

End cap connects to the track section end.

Track suspension parts
Suspension kit with 6mm x 1m rod.

Track suspension parts
Suspension kit with 1.5m wire.

Cover plate

For model:
DG-074
DG-075

For model:
DG-079

For model:
DG-080
DG-081

For model:
DG-082
DG-083
DG-084
DG-085

For model:
DG-086



Features

- 1. High quality, high light efficiency, COB with high CRI, using high precision die-cast aluminum for physical heat dissipation to ensure the long life of lamps, flicker free drive, comply with CE, SAA, and UKCA.
- 2. Flexible DIY front-end optical kit to adapt to various scenarios.
- 3. With adjustable single side 45 degrees and horizontal rotation 355 degrees design, easy to adapt to a variety of irradiation angles.
- 4. Family design with 230V main voltage, 48V low voltage, and pendant versions.

Application

Shopping mall, hotel, house, art galleries.



High lumen

90lm/W

50000

50000hrs

90°

90° vertically

More CCT

IP20

IP Level

350°

350° horizontally





DG11101



Power: 12W (260mA/36V)
Lamp: CITIZEN COB (CRI>80)
DC: 48V

Beam Angle	Model	Lumen	Finish	LED Colour	LED Driver
36°	DG11101.2	900lm	1 Matt White 2 Matt Black 3 Silver	1 3000K 2 4000K 3 5000K 5 2700K	1 On and off 2 1~10V dimmable 3 Dali

LED Driver
LED Colour
Finish




DG21101



Power: 12W (260mA/36V)
Lamp: CITIZEN COB (CRI>80)
DC: 48V

Beam Angle	Model	Lumen	Finish	LED Colour	LED Driver
180°	DG21101.4	900lm	1 Matt White 2 Matt Black 3 Silver	1 3000K 2 4000K 3 5000K 5 2700K	1 On and off 2 1~10V dimmable 3 Dali

LED Driver
LED Colour
Finish




DG31101



Power: 12W (260mA/36V)
Lamp: CITIZEN COB (CRI>80)
DC: 48V

Beam Angle	Model	Lumen	Finish	LED Colour	LED Driver
36°	DG31101.2	900lm	1 Matt White 2 Matt Black 3 Silver	1 3000K 2 4000K 3 5000K 5 2700K	1 On and off 2 1~10V dimmable 3 Dali

LED Driver
LED Colour
Finish




Appo.A



48V Track Light





DG11102




Power: 12W (260mA/36V)
Lamp: CITIZEN COB (CRI>80)
DC: 48V

Beam Angle	Model	Lumen	Finish	LED Colour	LED Driver
36°	DG11102.2	900lm	1 Matt White 2 Matt Black 3 Silver	1 3000K 2 4000K 3 5000K 5 2700K	1 On and off 2 1~10V dimmable 3 Dali

LED Driver
LED Colour
Finish




DG21102




Power: 12W (260mA/36V)
Lamp: CITIZEN COB (CRI>80)
DC: 48V

Beam Angle	Model	Lumen	Finish	LED Colour	LED Driver
180°	DG21102.4	900lm	1 Matt White 2 Matt Black 3 Silver	1 3000K 2 4000K 3 5000K 5 2700K	1 On and off 2 1~10V dimmable 3 Dali

LED Driver
LED Colour
Finish




DG31102



Power: 12W (260mA/36V)
Lamp: CITIZEN COB (CRI>80)
DC: 48V

Beam Angle	Model	Lumen	Finish	LED Colour	LED Driver
36°	DG31102.4	900lm	1 Matt White 2 Matt Black 3 Silver	1 3000K 2 4000K 3 5000K 5 2700K	1 On and off 2 1~10V dimmable 3 Dali

LED Driver
LED Colour
Finish





Features

- 1. High quality, high light efficiency, COB with high CRI, using high precision die-cast aluminum for physical heat dissipation to ensure the long life of lamps, flicker free drive, comply with CE, SAA, and UKCA.
- 2. Flexible DIY front-end optical kit to adapt to various scenarios.
- 3. With adjustable single side 45 degrees and horizontal rotation 355 degrees design, easy to adapt to a variety of irradiation angles.
- 4. Family design with 230V main voltage, 48V low voltage, and pendant versions.

Application

Shopping mall, hotel, house, art galleries.



High lumen

90lm/W

50000

50000hrs

90° vertically

90°

More CCT

IP20

IP Level

350° horizontally

350°




CE

RoHS

IP20

ERP




Power: 12W (260mA/36V)
Lamp: CITIZEN COB (CRI>80)
AC: 200-240V

Beam Angle	Model	Lumen	Finish	LED Colour	LED Driver
36°	DG11103.2	900lm	1 Matt White 2 Matt Black 3 Silver	1 3000K 2 4000K 3 5000K 5 2700K	1 On and off 2 Triac dimmable 3 1~10V dimmable 4 Dali

DG11103

LED Driver
LED Colour
Finish




CE

RoHS

IP20

ERP




Power: 12W (260mA/36V)
Lamp: CITIZEN COB (CRI>80)
AC: 200-240V

Beam Angle	Model	Lumen	Finish	LED Colour	LED Driver
180°	DG21103.4	900lm	1 Matt White 2 Matt Black 3 Silver	1 3000K 2 4000K 3 5000K 5 2700K	1 On and off 2 Triac dimmable 3 1~10V dimmable 4 Dali

DG21103

LED Driver
LED Colour
Finish




CE

RoHS

IP20

ERP




Power: 12W (260mA/36V)
Lamp: CITIZEN COB (CRI>80)
AC: 200-240V

Beam Angle	Model	Lumen	Finish	LED Colour	LED Driver
36°	DG31103.2	900lm	1 Matt White 2 Matt Black 3 Silver	1 3000K 2 4000K 3 5000K 5 2700K	1 On and off 2 Triac dimmable 3 1~10V dimmable 4 Dali

DG31103

LED Driver
LED Colour
Finish




Appo.B



Track Light




DG11104




Power: 12W (260mA/36V)
Lamp: CITIZEN COB (CRI>80)
AC: 200-240V

Beam Angle	Model	Lumen	Finish	LED Colour	LED Driver
36°	DG11104.2	900lm	1 Matt White 2 Matt Black 3 Silver	1 3000K 2 4000K 3 5000K 5 2700K	1 On and off 2 Triac dimmable 3 1~10V dimmable 4 Dali

LED Driver
LED Colour
Finish




DG21104




Power: 12W (260mA/36V)
Lamp: CITIZEN COB (CRI>80)
AC: 200-240V

Beam Angle	Model	Lumen	Finish	LED Colour	LED Driver
180°	DG21104.4	900lm	1 Matt White 2 Matt Black 3 Silver	1 3000K 2 4000K 3 5000K 5 2700K	1 On and off 2 Triac dimmable 3 1~10V dimmable 4 Dali

LED Driver
LED Colour
Finish




DG51104



Power: 12W (260mA/36V)
Lamp: CITIZEN COB (CRI>80)
AC: 200-240V

Beam Angle	Model	Lumen	Finish	LED Colour	LED Driver
36°	DG51104.2	900lm	1 Matt White 2 Matt Black 3 Silver	1 3000K 2 4000K 3 5000K 5 2700K	1 On and off 2 Triac dimmable 3 1~10V dimmable 4 Dali

LED Driver
LED Colour
Finish





Features

- 1. High quality, high light efficiency, COB with high CRI, using high precision die-cast aluminum for physical heat dissipation to ensure the long life of lamps, flicker free drive, comply with CE, SAA, and UKCA.
- 2. Flexible DIY front-end optical kit to adapt to various scenarios.
- 3. With adjustable single side 45 degrees and horizontal rotation 355 degrees design, easy to adapt to a variety of irradiation angles.
- 4. Family design with 230V main voltage, 48V low voltage, and pendant versions.

Application

Shopping mall, hotel, house, art galleries.



High lumen

90lm/W

50000hrs

50000

45°

45° vertically


More CCT

IP20

IP Level

350°

350° horizontally

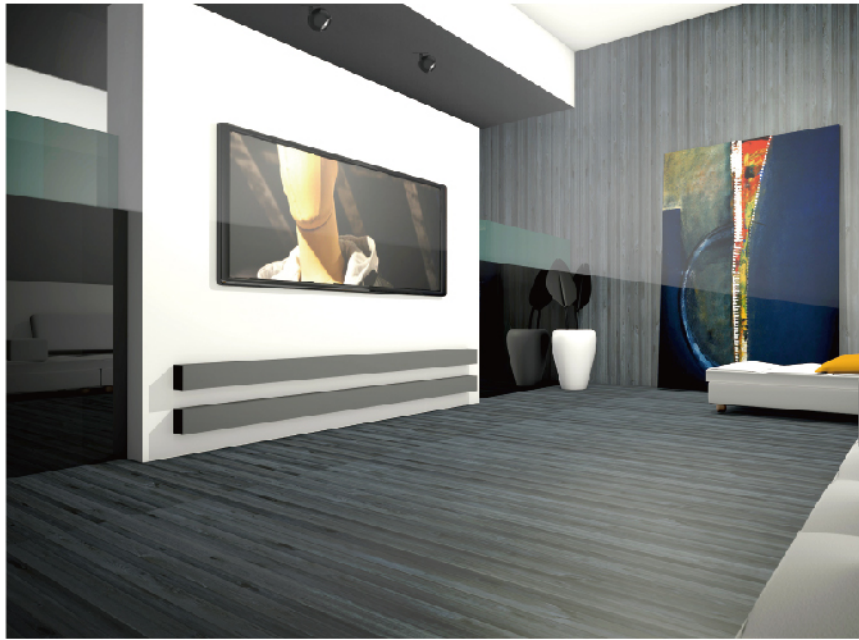


TC11101

CE

IP20



ERP



Power: 12W (260mA/36V)
Lamp: CITIZEN COB (CRI>80)
AC: 200-240V

Beam Angle	Model	Lumen	Finish	LED Colour	LED Driver
36°	TC11101.2	900lm	1 Matt White	1 3000K	1 On and off
			2 Matt Black	2 4000K	2 1~10V dimmable
				3 5000K	3 Dali
				5 2700K	

LED Driver
LED Colour
Finish




TC21101

CE

IP20


ERP



Power: 12W (260mA/36V)
Lamp: CITIZEN COB (CRI>80)
AC: 200-240V

Beam Angle	Model	Lumen	Finish	LED Colour	LED Driver
180°	TC21101.4	900lm	1 Matt White	1 3000K	1 On and off
			2 Matt Black	2 4000K	2 1~10V dimmable
			3 Silver	3 5000K	3 Dali
				5 2700K	

LED Driver
LED Colour
Finish




TC31101

CE

IP20


ERP



Power: 12W (260mA/36V)
Lamp: CITIZEN COB (CRI>80)
AC: 200-240V

Beam Angle	Model	Lumen	Finish	LED Colour	LED Driver
36°	TC31101.2	900lm	1 Matt White	1 3000K	1 On and off
			2 Matt Black	2 4000K	2 1~10V dimmable
			3 Silver	3 5000K	3 Dali
				5 2700K	

LED Driver
LED Colour
Finish





Features

- 1. High quality, high light efficiency, COB with high CRI, using high precision die-cast aluminum for physical heat dissipation to ensure the long life of lamps, flicker free drive, comply with CE, SAA, and UKCA.
- 2. Flexible DIY front-end optical kit to adapt to various scenarios.
- 3. With adjustable single side 45 degrees and horizontal rotation 355 degrees design, easy to adapt to a variety of irradiation angles.
- 4. Family design with high voltage, low voltage, and pendant versions.

Application

Shopping mall, hotel, house, art galleries.



High lumen

90lm/W

50000

50000hrs

45°

45° vertically

More CCT

IP20

IP Level

350°

350° horizontally




DC11101

CE

IP20


ERP



Power: 12W (260mA/36V)
Lamp: CITIZEN COB (CRI>80)
AC: 200-240V

Beam Angle	Model	Lumen	Finish	LED Colour	LED Driver
36°	DC11101.2	900lm	1 Matt White	1 3000K	1 On and off
			2 Matt Black	2 4000K	2 1~10V dimmable
				3 5000K	3 Dali
				5 2700K	

LED Driver
LED Colour
Finish




DC21101

CE

IP20


ERP



Power: 12W (260mA/36V)
Lamp: CITIZEN COB (CRI>80)
AC: 200-240V

Beam Angle	Model	Lumen	Finish	LED Colour	LED Driver
180°	DC21101.4	900lm	1 Matt White	1 3000K	1 On and off
			2 Matt Black	2 4000K	2 1~10V dimmable
			3 Silver	3 5000K	3 Dali
				5 2700K	

LED Driver
LED Colour
Finish




DC31101

CE

IP20


ERP



Power: 12W (260mA/36V)
Lamp: CITIZEN COB (CRI>80)
AC: 200-240V

Beam Angle	Model	Lumen	Finish	LED Colour	LED Driver
36°	DC31101.2	900lm	1 Matt White	1 3000K	1 On and off
			2 Matt Black	2 4000K	2 1~10V dimmable
			3 Silver	3 5000K	3 Dali
				5 2700K	

LED Driver
LED Colour
Finish



Features

- 1. Work on 48V low voltage with safety. On/off, DALI, 0-10V optional.
- 2. Simplified design, ultra-thickness, with beauty and adaptation to different atmosphere. Finish in matt white and black as optional.
- 3. 0-350° rotating horizontally, 0-90° tilting vertically.

Application

Shopping mall, hotel.



High lumen

90lm/W

50000

50000hrs

IP20

IP Level

More CCT

350°

350° horizontally

90°

90° vertically



CE


IP20

ERP

Power: 10W (250mA/39V)
Lamp: EPISTAR SMD (CRI>80)
DC: 48V

Beam Angle	Model	Lumen	Finish	LED Colour	LED Driver
100°	DG39103.4	820lm	1 Matt White 2 Matt Black 3 Silver	1 3000K 2 4000K 3 5000K 5 2700K	1 On and off 2 1~10V dimmable 3 Dali

LED Driver
LED Colour
Finish



DG39103

CE


IP20

ERP


Power: 18W (450mA/36V)
Lamp: EPISTAR SMD (CRI>80)
DC: 48V

Beam Angle	Model	Lumen	Finish	LED Colour	LED Driver
100°	DG39183.4	1740lm	1 Matt White 2 Matt Black 3 Silver	1 3000K 2 4000K 3 5000K 5 2700K	1 On and off 2 1~10V dimmable 3 Dali

LED Driver
LED Colour
Finish



DG39183

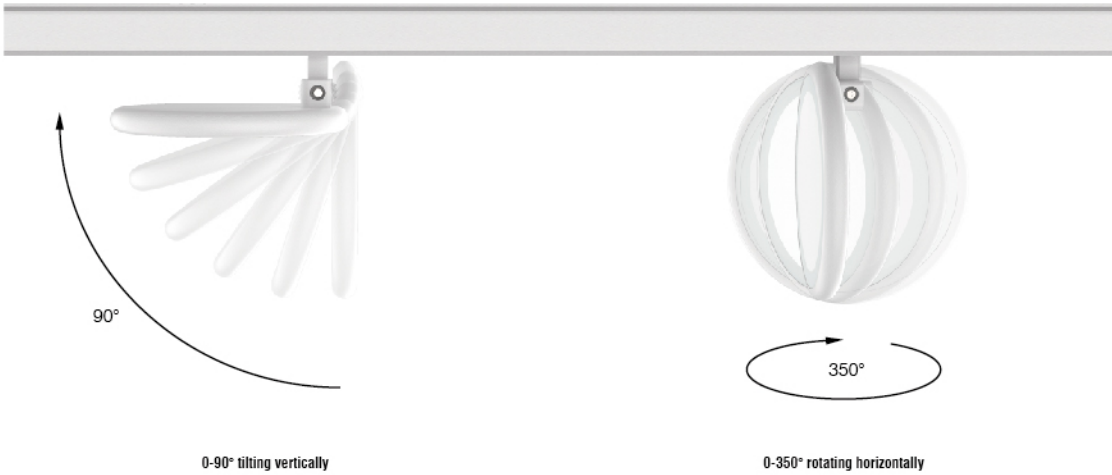

Features

- 1. Work on 48V low voltage with safety. On/off, DALI, 0-10V optional.
- 2. Simplified design, ultra-thickness, with beauty and adaptation to different atmosphere. Finish in matt white and black as optional.

Application

Shopping mall, hotel.



High lumen 90lm/W

50000hrs 50000

IP20 IP Level

More CCT



DG39104

CE

RoHS

IP20


III

ERP

Power: 10W (250mA/39V)
Lamp: EPISTAR SMD (CRI>80)
DC: 48V

Beam Angle	Model	Lumen	Finish	LED Colour	LED Driver
100°	DG39104.4	820lm	1 Matt White 2 Matt Black 3 Silver	1 3000K 2 4000K 3 5000K 5 2700K	1 On and off 2 1~10V dimmable 3 Dali

LED Driver
LED Colour
Finish



DG39184

CE

RoHS

IP20


III

ERP

Power: 18W (450mA/36V)
Lamp: EPISTAR SMD (CRI>80)
DC: 48V

Beam Angle	Model	Lumen	Finish	LED Colour	LED Driver
100°	DG39184.4	1740lm	1 Matt White 2 Matt Black 3 Silver	1 3000K 2 4000K 3 5000K 5 2700K	1 On and off 2 1~10V dimmable 3 Dali

LED Driver
LED Colour
Finish



Features

- 1. Slim design with specially designed optical system ,which the light output is so soft and comfortable.
- 2. Driver integrated in the apdator ,the design is elegant and compact; Matt white and matt black for option.
- 3. 350° rotating horizontally, 90° tilting vertically.

Application

Shopping mall, hotel.



High lumen

90lm/W

50000hrs

IP20

IP Level

More CCT

350° horizontally

90° vertically




DG39101

CE


IP20

ERP



Power: 10W (250mA/39V)
Lamp: EPISTAR SMD (CRI>80)
AC: 200-240V

Beam Angle	Model	Lumen	Finish	LED Colour	LED Driver
100°	DG39101.4	820lm	1 Matt White 2 Matt Black 3 Silver	1 3000K 2 4000K 3 5000K 5 2700K	1 On and off 2 Triac dimmable 3 1~10V dimmable 4 Dali




DG39181

CE


IP20

ERP



Power: 18W (450mA/36V)
Lamp: EPISTAR SMD (CRI>80)
AC: 200-240V

Beam Angle	Model	Lumen	Finish	LED Colour	LED Driver
100°	DG39181.4	1740lm	1 Matt White 2 Matt Black 3 Silver	1 3000K 2 4000K 3 5000K 5 2700K	1 On and off 2 Triac dimmable 3 1~10V dimmable 4 Dali




Features

- 1. Slim design with specially designed optical system ,which the light output is so soft and comfortable.
- 2. Driver integrated in the apdator ,the design is elegant and compact; Matt white and matt black for option.

Application

Shopping mall, hotel.



High lumen

90lm/W

50000

50000hrs

IP20

IP Level

More CCT





CE

RoHS

IP20

ERP

Max 1500

200

13.5

Ø132

Power: 10W (250mA/39V)
Lamp: EPISTAR COB (CRI>80)
AC: 200-240V


Beam Angle	Model	Lumen	Finish	LED Colour	LED Driver
100°	DG39102.4	820lm	1 Matt White 2 Matt Black 3 Silver	1 3000K 2 4000K 3 5000K 5 2700K	1 On and off 2 Triac dimmable 3 1~10V dimmable 4 Dali

LED Driver

LED Colour

Finish

DG39102.4_100°



H(m)	E(lx)	D(m)
1 m	338.5 lx	2.29 m
2 m	84.63 lx	4.59 m
3 m	37.61 lx	6.88 m
4 m	21.16 lx	9.18 m
5 m	13.54 lx	11.47 m



CE

RoHS

IP20

ERP

Max 1500

200

13.5

Ø200

Power: 18W (450mA/36V)
Lamp: EPISTAR COB (CRI>80)
AC: 200-240V


Beam Angle	Model	Lumen	Finish	LED Colour	LED Driver
100°	DG39182.4	1740lm	1 Matt White 2 Matt Black 3 Silver	1 3000K 2 4000K 3 5000K 5 2700K	1 On and off 2 Triac dimmable 3 1~10V dimmable 4 Dali

LED Driver

LED Colour

Finish

DG39182.4_100°



H(m)	E(lx)	D(m)
1 m	704.2 lx	2.32 m
2 m	176.1 lx	4.64 m
3 m	78.25 lx	6.95 m
4 m	44.01 lx	9.27 m
5 m	28.17 lx	11.59 m

Features

- 1. Recessed design , On-off , triac dimmable, DALI,0-10V for option.
- 2. Simple and ultra-thin design as well as beautiful and decent appearance,can be with superior finish color matt white and matt black.
- 3. 0-350° rotating horizontally.

Application

Shopping mall, hotel.



High lumen

90lm/W

50000

50000hrs

IP20

IP Level

More CCT

350° horizontally

90° vertically






CE

IP20

ERP




ø170
160mm

Power: 10W (250mA/39V)
Lamp: EPISTAR COB (CRI>80)
AC: 200-240V

Beam Angle	Model	Lumen	Finish	LED Colour	LED Driver
100°	TC39101.4	820lm	1 Matt White 2 Matt Black 3 Silver	1 3000K 2 4000K 3 5000K	1 On and off 2 Triac dimmable 3 1~10V dimmable 4 Dali 5 Bluetooth

LED Driver
LED Colour
Finish



TC39101



CE

IP20

ERP




ø240
230mm

Power: 18W (450mA/36V)
Lamp: EPISTAR COB (CRI>80)
AC: 200-240V

Beam Angle	Model	Lumen	Finish	LED Colour	LED Driver
100°	TC39181.4	1740lm	1 Matt White 2 Matt Black 3 Silver	1 3000K 2 4000K 3 5000K	1 On and off 2 Triac dimmable 3 1~10V dimmable 4 Dali 5 Bluetooth

LED Driver
LED Colour
Finish



TC39181



Features

- 1. Recessed design , On-off , triac dimmable, DALI,0-10V for option.
- 2. Simple and ultra-thin design as well as beautiful and decent appearance,can be with superior finish color matt white and matt black.
- 3. 0-350° rotating horizontally.

Application

Shopping mall, hotel.



High lumen

90lm/W

50000

50000hrs

IP20

IP Level

More CCT

350° horizontally

15°/25° vertically



TC39102

CE

IP20


ERP



Power: 10W (250mA/39V)
Lamp: EPISTAR COB (CRI>80)
AC: 200-240V

Beam Angle	Model	Lumen	Finish	LED Colour	LED Driver
100°	TC39102.4	820lm	1 Matt White 2 Matt Black 3 Silver	1 3000K 2 4000K 3 5000K	1 On and off 2 Triac dimmable 3 1~10V dimmable 4 Dali 5 Bluetooth

LED Driver
LED Colour
Finish



TC39182

CE

IP20


ERP



Power: 18W (450mA/36V)
Lamp: EPISTAR COB (CRI>80)
AC: 200-240V

Beam Angle	Model	Lumen	Finish	LED Colour	LED Driver
100°	TC39182.4	1740lm	1 Matt White 2 Matt Black 3 Silver	1 3000K 2 4000K 3 5000K	1 On and off 2 Triac dimmable 3 1~10V dimmable 4 Dali 5 Bluetooth

LED Driver
LED Colour
Finish



Pendent

Oligo Light

Features

- 1. Surfaced mounted design .
- 2. With the built-in driver design as well as beautiful and decent appearance,can be with superior finish color matt white and matt black.

Application

Shopping mall, hotel.



High lumen

90lm/W

50000hrs

IP20

IP Level

More CCT



Pendent

Oligo Light




DC39102

CE

IP20

ERP



Power: 10W (250mA/39V)

Lamp: EPISTAR COB (CRI>80)


AC: 200-240V

Beam Angle	Model	Lumen	Finish	LED Colour	LED Driver
	DC39102.4	820lm	☐ 1 Matt White	☐ 1 3000K	☐ 1 On and off
			☐ 2 Matt Black	☐ 2 4000K	☐ 2 Triac dimmable
			☐ 3 Silver	☐ 3 5000K	☐ 3 1~10V dimmable
					☐ 4 Dali
					☐ 5 Bluetooth

LED Driver

LED Colour

Finish




DC39182

CE

IP20

ERP



Power: 18W (450mA/36V)

Lamp: EPISTAR COB (CRI>80)


AC: 200-240V

Beam Angle	Model	Lumen	Finish	LED Colour	LED Driver
	DC39182.4	1740lm	☐ 1 Matt White	☐ 1 3000K	☐ 1 On and off
			☐ 2 Matt Black	☐ 2 4000K	☐ 2 Triac dimmable
			☐ 3 Silver	☐ 3 5000K	☐ 3 1~10V dimmable
					☐ 4 Dali
					☐ 5 Bluetooth

LED Driver

LED Colour

Finish



Features

- 1. Slim design with specially designed optical system ,which the light output is so soft and comfortable.
- 2. The design is elegant and compact; Matt white and matt black for option.
- 3. 0-350°rotating horizontally, 0-90°tilting vertically.

Application

shopping mall . hotel etc.



High lumen

90lm/W

50000

50000hrs

IP20

IP Level

More CCT




DC39101

CE

RoHS

IP20


ERP



Power: 10W (250mA/39V)
Lamp: EPISTAR COB (CRI>80)
AC: 200-240V

Beam Angle	Model	Lumen	Finish	LED Colour	LED Driver
100°	DC39101.1	820lm	1 Matt White 2 Matt Black 3 Silver	1 3000K 2 4000K 3 5000K 5 2700K	1 On and off 2 Triac dimmable 3 1~10V dimmable 4 Dali 5 Bluetooth

LED Driver
LED Colour
Finish




DC39181

CE

RoHS

IP20


ERP



Power: 18W (450mA/36V)
Lamp: EPISTAR COB (CRI>80)
AC: 200-240V

Beam Angle	Model	Lumen	Finish	LED Colour	LED Driver
100°	DC39181.4	1740lm	1 Matt White 2 Matt Black 3 Silver	1 3000K 2 4000K 3 5000K 5 2700K	1 On and off 2 Triac dimmable 3 1~10V dimmable 4 Dali 5 Bluetooth

LED Driver
LED Colour
Finish



Features




- 1. Work on 48V low voltage with safety. On/off, DALI, 0-10V optional.
- 2. 0-350° rotating horizontally, 0-90° tilting vertically.
- 3. Simplified design, with beauty and adaptation to different atmosphere. Finish in matt white and black as optional.
- 4. Anti-glare ring available in white, black, silver & golden etc.
- 5. Beam angle in 20°, 30° and 40°.

Application


Shopping mall, hotel, house, art galleries.




High lumen	90lm/W	50000	50000hrs		More watt (3-30W)		More sizes
IP20	IP Level		350° horizontally		90° vertically		More CCT

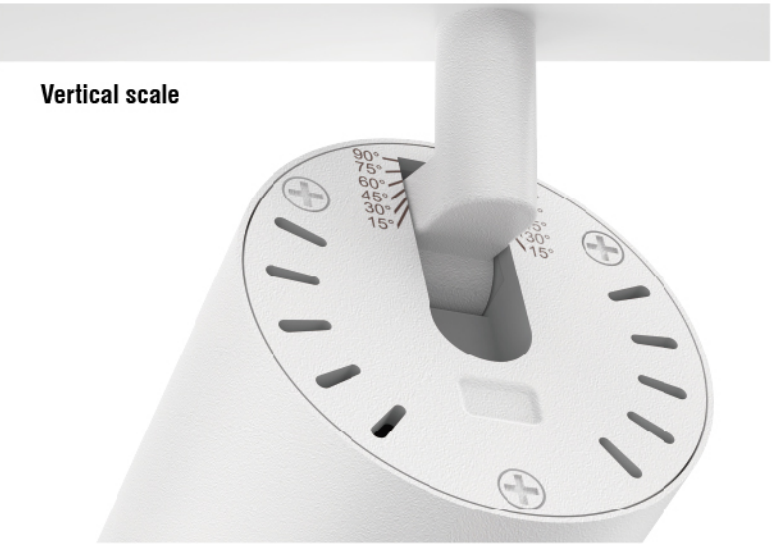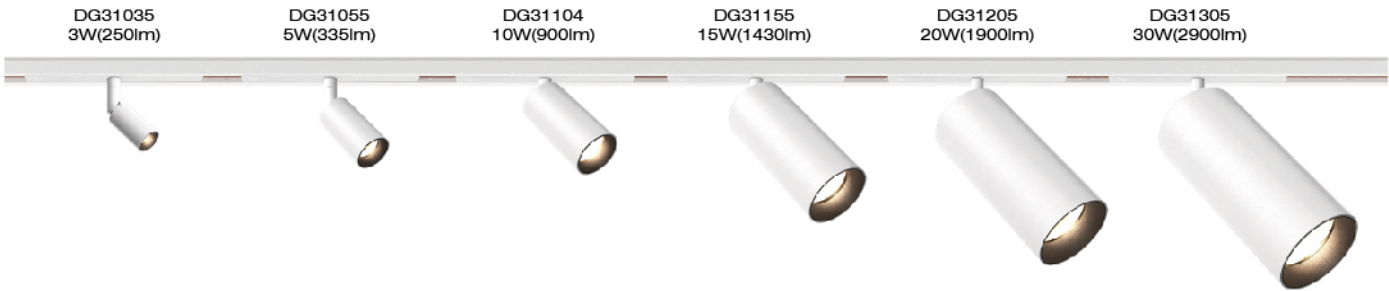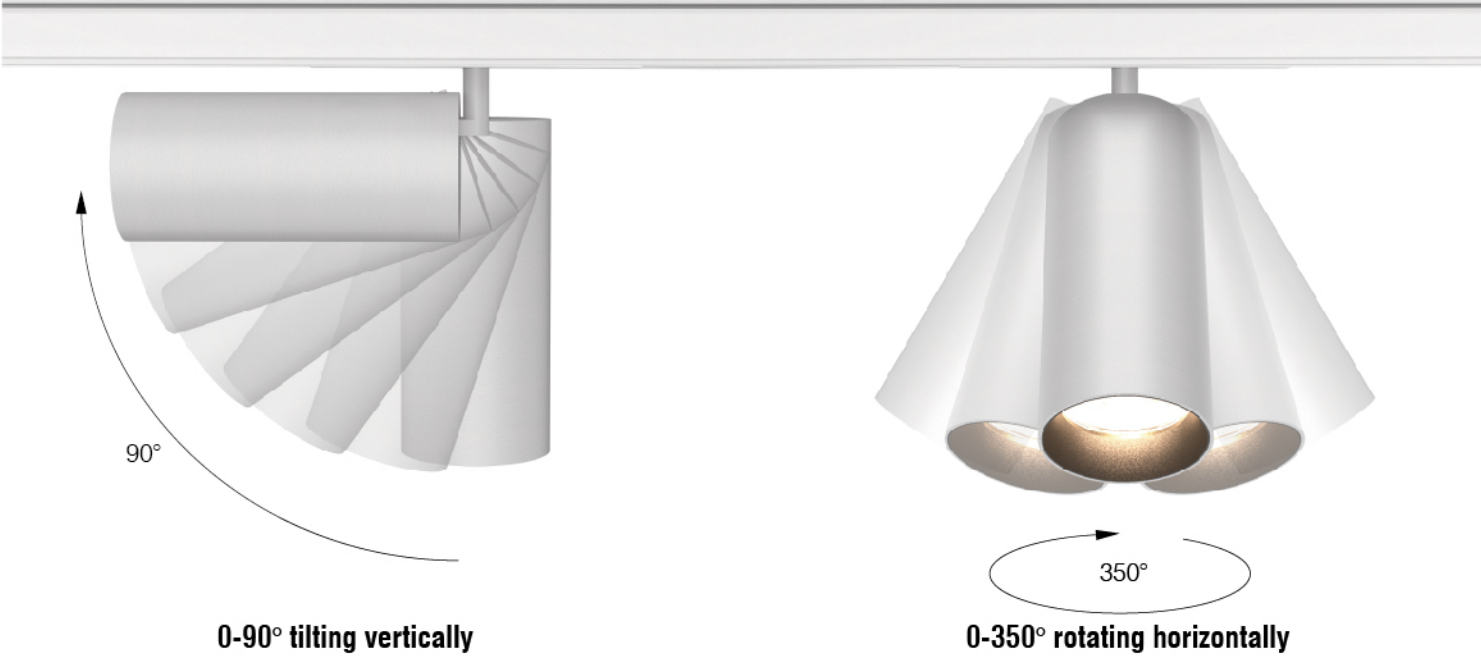


Installation Manual

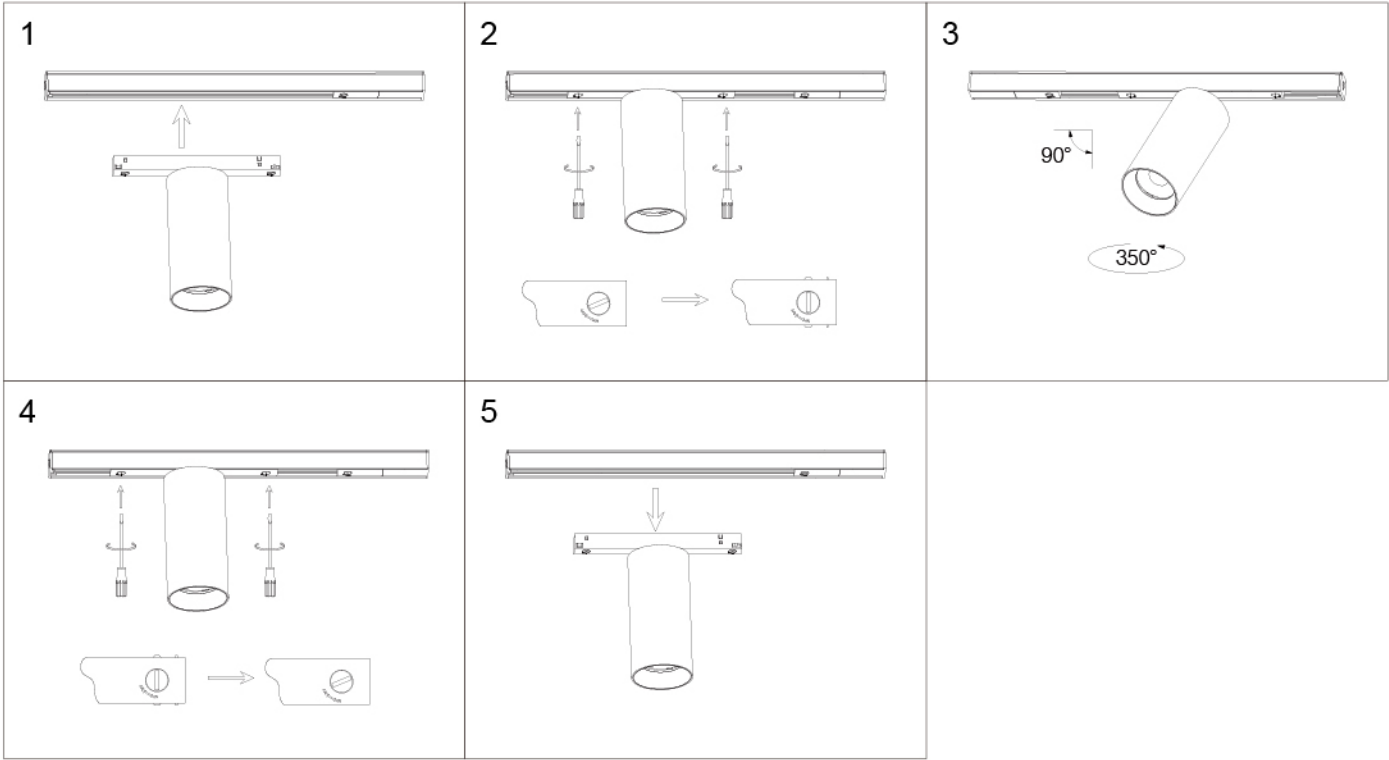




DG31035




Power: 3W (350mA/6V)
Lamp: OSRAM SMD (CRI>80)
DC: 48V

Beam Angle	Model	Lumen	Finish	LED Colour	LED Driver
30°	DG31035.2_	250lm	1 Matt White 2 Matt Black 3 Silver	1 3000K 2 4000K 3 5000K 5 2700K	1 On and off 2 1~10V dimmable 3 Dali
40°	DG31035.3	250lm			

LED Driver
LED Colour
Finish

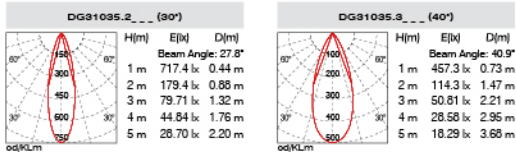



DG31055




Power: 5W (350mA/9V)
Lamp: EPISTAR COB (CRI>80)
DC: 48V

Beam Angle	Model	Lumen	Finish	LED Colour	LED Driver
18°	DG31055.1_	335lm	1 Matt White 2 Matt Black 3 Silver	1 3000K 2 4000K 3 5000K 5 2700K	1 On and off 2 1~10V dimmable 3 Dali
24°	DG31055.2_	335lm			
36°	DG31055.3	335lm			

LED Driver
LED Colour
Finish

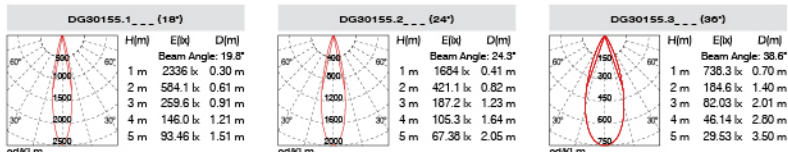


DG31104




Power: 10W (250mA/36V)
Lamp: CITIZEN COB (CRI>80)
DC: 48V

Beam Angle	Model	Lumen	Finish	LED Colour	LED Driver
20°	DG31104.1_	900lm	1 Matt White 2 Matt Black 3 Silver	1 3000K 2 4000K 3 5000K 4 2000K - 2800K Dim to warm 5 2700K	1 On and off 2 1~10V dimmable 3 Dali
30°	DG31104.2_	900lm			
40°	DG31104.3	900lm			

LED Driver
LED Colour
Finish

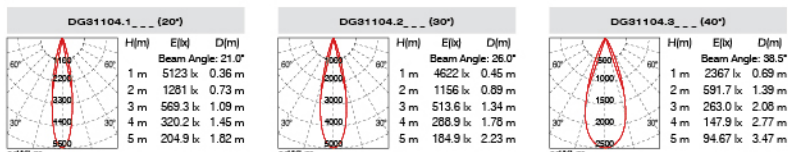


DG31155




Power: 15W (350mA/36V)
Lamp: CITIZEN COB (CRI>80)
DC: 48V

Beam Angle	Model	Lumen	Finish	LED Colour	LED Driver
20°	DG31155.1_	1430lm	1 Matt White 2 Matt Black 3 Silver	1 3000K 2 4000K 3 5000K 4 2000K - 2800K Dim to warm 5 2700K	1 On and off 2 1~10V dimmable 3 Dali
30°	DG31155.2_	1430lm			
40°	DG31155.3	1430lm			

LED Driver
LED Colour
Finish

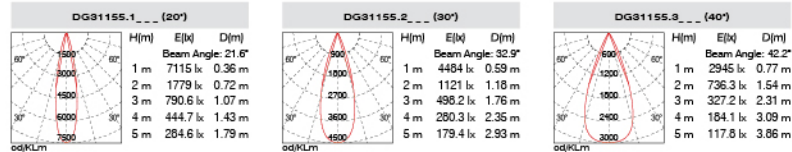


DG31205




Power: 20W (500mA/36V)
Lamp: CITIZEN COB (CRI>80)
DC: 48V

Beam Angle	Model	Lumen	Finish	LED Colour	LED Driver
20°	DG31205.1_	1900lm	1 Matt White 2 Matt Black 3 Silver	1 3000K 2 4000K 3 5000K 4 2000K - 2800K Dim to warm 5 2700K	1 On and off 2 1~10V dimmable 3 Dali
30°	DG31205.2_	1900lm			
40°	DG31205.3	1900lm			

LED Driver
LED Colour
Finish

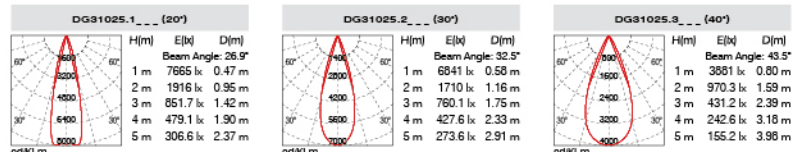


DG31305



Power: 30W (700mA/36V)
Lamp: CITIZEN COB (CRI>80)
DC: 48V

Beam Angle	Model	Lumen	Finish	LED Colour	LED Driver
20°	DG31305.1_	2900lm	1 Matt White 2 Matt Black 3 Silver	1 3000K 2 4000K 3 5000K 4 2000K - 2800K Dim to warm 5 2700K	1 On and off 2 1~10V dimmable 3 Dali
30°	DG31305.2_	2900lm			
40°	DG31305.3	2900lm			

LED Driver
LED Colour
Finish

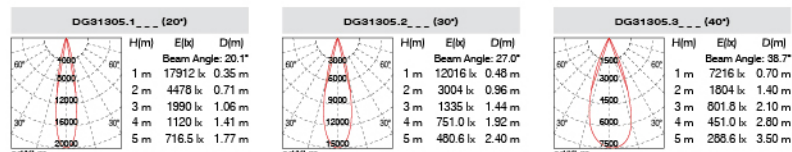

Features

- 1. Work on 48V low voltage with safety. On/off, DALI, 0-10V optional.
- 2. Simplified design, with beauty and adaptation to different atmosphere. Finish in matt white and black as optional.
- 3. Anti-glare ring available in white, black, silver & golden etc. Lens optional for interchange.
- 4. Beam angle in 20°, 30° and 40°.

Application

Shopping mall, hotel.



High lumen

90lm/W

50000

50000hrs

IP20

IP Level

More CCT



DG14052


CE

IP20

ERP

Power: 5W (350mA/9V)
Lamp: EPISTAR COB (CRI>80)
DC: 48V

Beam Angle	Model	Lumen	Finish	LED Colour	LED Driver
18°	DG14052.1_ _ _	335lm	1 Matt White	1 3000K	1 On and off
24°	DG14052.2_ _ _	335lm	2 Matt Black	2 4000K	2 1~10V dimmable
36°	DG14052.3_ _ _	335lm	3 Silver	3 5000K	3 Dali
				5 2700K	

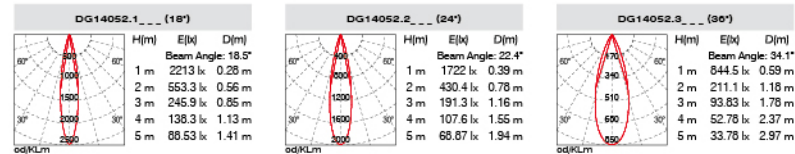

DG14102


CE

IP20

ERP

Power: 14W (350mA/36V)
Lamp: CITIZEN COB (CRI>80)
DC: 48V

Beam Angle	Model	Lumen	Finish	LED Colour	LED Driver
20°	DG14102.1_ _ _	1430lm	1 Matt White	1 3000K	1 On and off
30°	DG14102.2_ _ _	1430lm	2 Matt Black	2 4000K	2 1~10V dimmable
40°	DG14102.3_ _ _	1430lm	3 Silver	3 5000K	3 Dali
				4 2000K - 2800K Dim to warm	
				5 2700K	

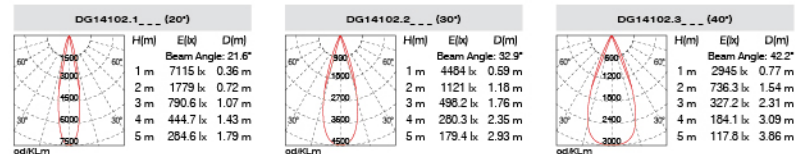


Features


- 1. Compact , intelligent ,modular magnetic adapter which is very safe by low wattage power supply . It can realize on-off , DALI , 0-10V dimming function , easier installation ; With rotated horizontally 350 degrees and vertically 90degrees.
- 2. Imported genuine LED (COB), which is packaged by original manufacturer, energy-saving, eco-friendly and high efficient, perfectly restores the original vivid color and effectively elevates your products appearance, creating a comfortable atmosphere. Life span expectancy 50,000 hours.
- 3. Unique optical design, precise light distribution and high efficient output, deliver more natural and soft light, with an elevated transparent diffuser equipped, high anti-glare; lens and reflector interchangeable perfectly.
- 4. Compact, simple and elegant structure, integrated design, high-quality aluminium alloy die-casting materials and perfect aerodynamic design, make more excellent heat dissipation performance by double ventilation through front and back heat dissipation design . The classical color of Matt white and Matt black for option suit for any scene.
- 5. Multiple wattage for option,accessories interchangeable freely , to meet the demands from different space.
- 6. Applicable to key lighting places such as shops , car exhibitions, jewellery, hotels, exhibition halls , museums , professional showcases, closets, franchised stores halls etc.



High lumen	90lm/W	50000	50000hrs	More watt (6-25W)	More sizes
IP20	IP Level	350°	350° horizontally	90°	90° vertically
				More CCT	

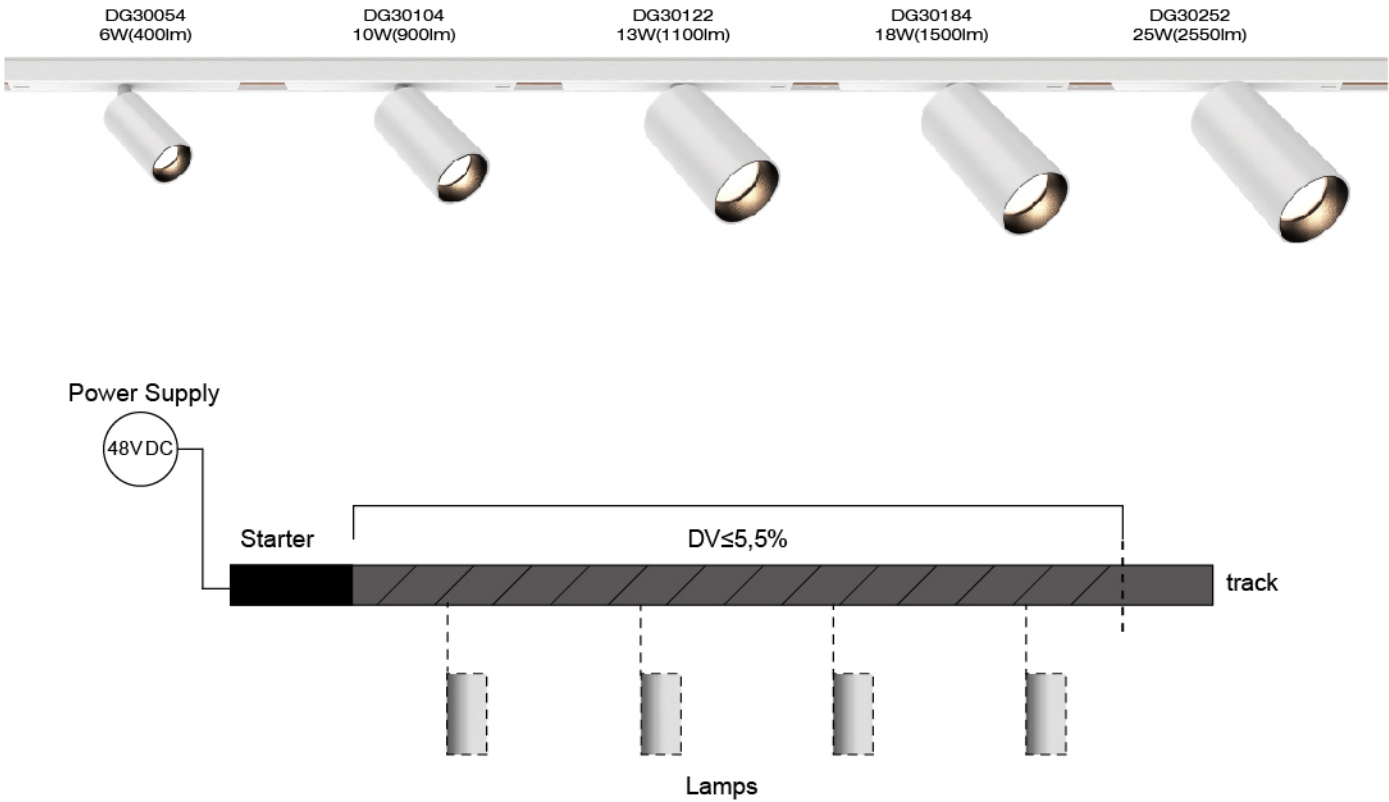


Installation Manual

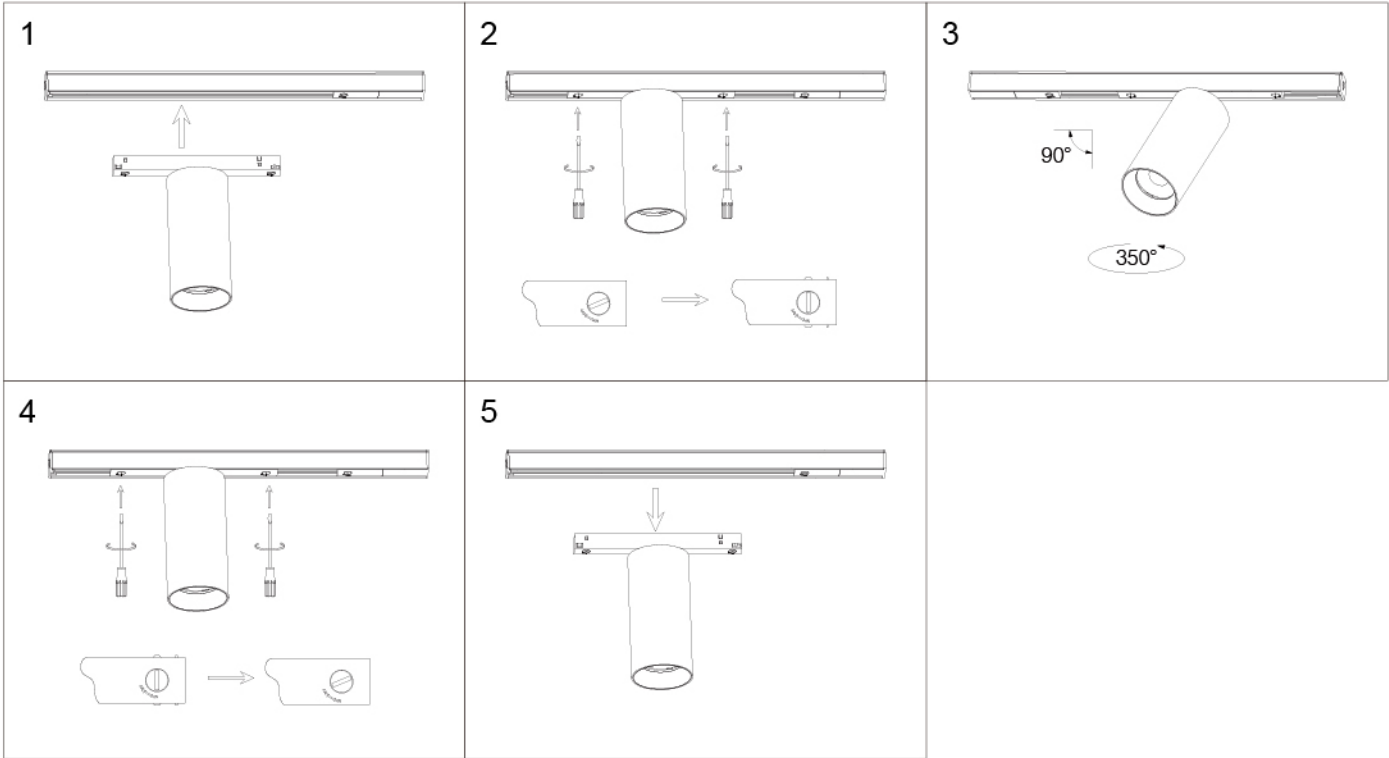




DG30054




Power: 6W (150mA/36V)
Lamp: CITIZEN COB (CRI>80)
DC: 48V

Beam Angle	Model	Lumen	Finish	LED Colour	LED Driver
15°	DG30054.1_	400lm	1 Matt White	1 3000K	1 On and off
24°	DG30054.2_	400lm	2 Matt Black	2 4000K	2 1~10V dimmable
36°	DG30054.3_	400lm	3 Silver	3 5000K	3 Dali

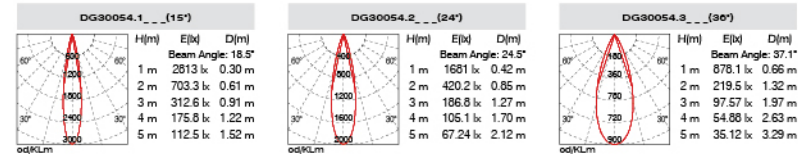


DG30104




Power: 10W (250mA/36V)
Lamp: CITIZEN COB (CRI>80)
DC: 48V

Beam Angle	Model	Lumen	Finish	LED Colour	LED Driver
15°	DG30104.1_	900lm	1 Matt White	1 3000K	1 On and off
24°	DG30104.2_	900lm	2 Matt Black	2 4000K	2 1~10V dimmable
36°	DG30104.3_	900lm	3 Silver	3 5000K	3 Dali

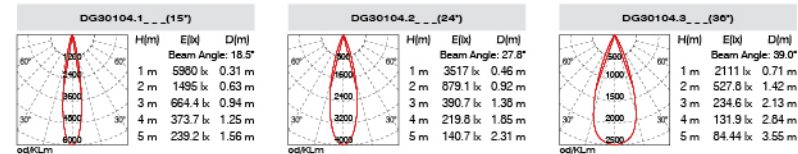


DG30122




Power: 13W (350mA/36V)
Lamp: CITIZEN COB (CRI>80)
DC: 48V

Beam Angle	Model	Lumen	Finish	LED Colour	LED Driver
20°	DG30122.1_	1100lm	1 Matt White	1 3000K	1 On and off
30°	DG30122.2_	1100lm	2 Matt Black	2 4000K	2 1~10V dimmable
40°	DG30122.3_	1100lm	3 Silver	3 5000K	3 Dali

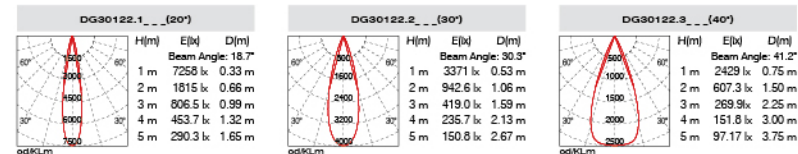


DG30184




Power: 18W (450mA/36V)
Lamp: CITIZEN COB (CRI>80)
DC: 48V

Beam Angle	Model	Lumen	Finish	LED Colour	LED Driver
20°	DG30184.1_	1500lm	1 Matt White	1 3000K	1 On and off
30°	DG30184.2_	1500lm	2 Matt Black	2 4000K	2 1~10V dimmable
40°	DG30184.3_	1500lm	3 Silver	3 5000K	3 Dali

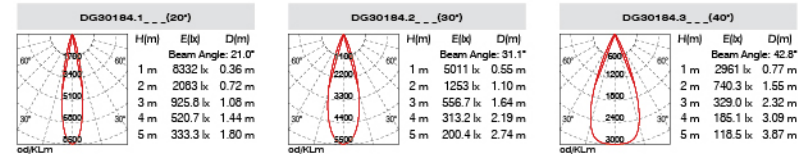


DG30252



Power: 25W (600mA/36V)
Lamp: CITIZEN COB (CRI>80)
DC: 48V

Beam Angle	Model	Lumen	Finish	LED Colour	LED Driver
15°	DG30252.1_	2550lm	1 Matt White	1 3000K	1 On and off
24°	DG30252.2_	2550lm	2 Matt Black	2 4000K	2 1~10V dimmable
36°	DG30252.3_	2550lm	3 Silver	3 5000K	3 Dali

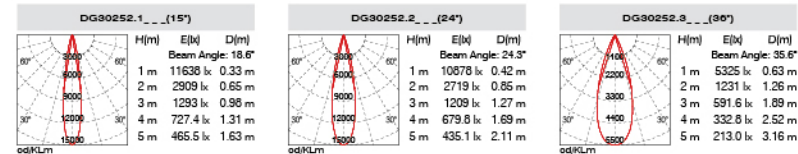


Features

- 1. Work on 48V low voltage with safety. On/off, DALI, 0-10V optional.
- 2. Simplified design, with beauty and adaptation to different atmosphere. Finish in matt white and black as optional.

Application

Shopping mall, hotel.

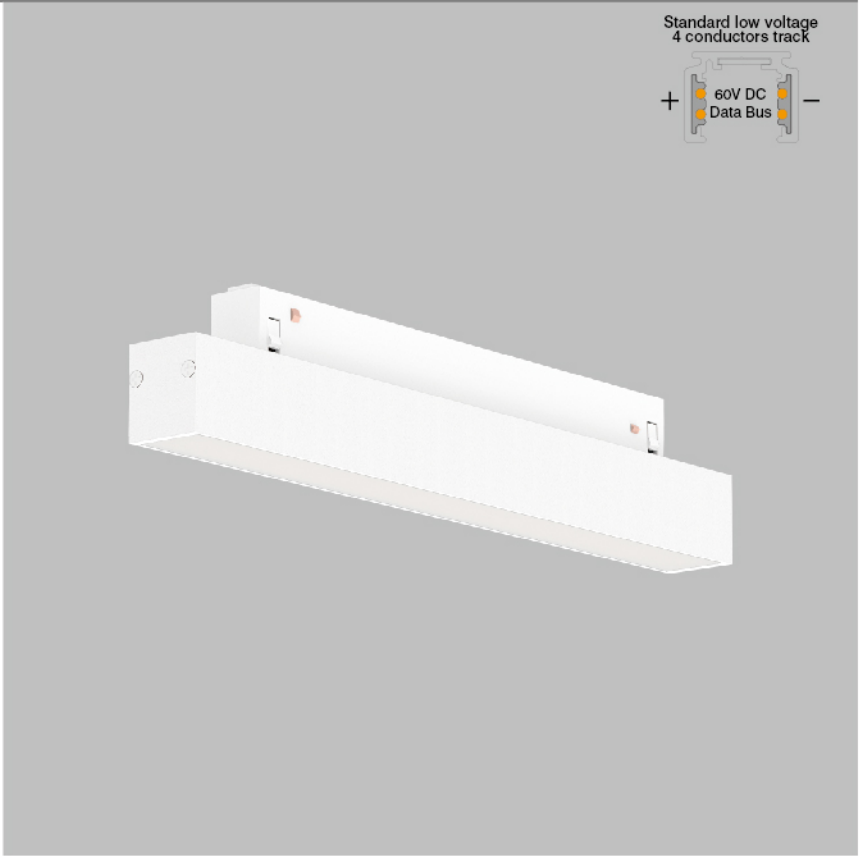

High lumen

90lm/W

50000

50000hrs

More watt

(7-30W)

More sizes

IP20

IP Level

More CCT




DG30081

CE

IP20

ERP



Power: 7W (200mA/36V)

Lamp: SAMSUNG SMD (CRI>80)



DC: 48V

Beam Angle	Model	Lumen	Finish	LED Colour	LED Driver
90°	DG30081.3	900lm	☐ 1 Matt White	☐ 1 3000K	☐ 1 On and off
			☒ 2 Matt Black	☐ 2 4000K	☒ 2 1~10V dimmable
			☐ 3 5000K	☐ 3 Dali	
			☐ 4 2700K		

LED Driver

LED Colour

Finish




DG30161

CE

IP20

ERP



Power: 15W (350mA/36V)

Lamp: SAMSUNG SMD (CRI>80)


DC: 48V

Beam Angle	Model	Lumen	Finish	LED Colour	LED Driver
90°	DG30161.3	1870lm	☐ 1 Matt White	☐ 1 3000K	☐ 1 On and off
			☒ 2 Matt Black	☐ 2 4000K	☒ 2 1~10V dimmable
			☐ 3 5000K	☐ 3 Dali	
			☐ 4 2700K		

LED Driver

LED Colour

Finish




DG30311

CE

IP20

ERP



Power: 30W (700mA/36V)

Lamp: SAMSUNG SMD (CRI>80)


DC: 48V

Beam Angle	Model	Lumen	Finish	LED Colour	LED Driver
90°	DG30311.3	2430lm	☐ 1 Matt White	☐ 1 3000K	☐ 1 On and off
			☒ 2 Matt Black	☐ 2 4000K	☒ 2 1~10V dimmable
			☐ 3 5000K	☐ 3 Dali	
			☐ 4 2700K		

LED Driver

LED Colour

Finish



Features

- 1. Work on 48V low voltage with safety. On/off, DALI, 0-10V optional.
- 2. Simplified design, with beauty and adaptation to different atmosphere. Finish in matt white and black as optional.
- 3. Anti-dazzle ring can be made in black, white, silver and gold.

Application

Shopping mall, hotel.



High lumen

90lm/W

50000

50000hrs

More watt (7-30W)

More sizes

IP20

IP Level

More CCT



DG31081


CE

RoHS

IP20

III


ERP



Power: 7W (200mA/36V)
Lamp: SAMSUNG SMD (CRI>80)
DC: 48V

Beam Angle	Model	Lumen	Finish	LED Colour	LED Driver
36°	DG31081.2	650lm	1 Matt White 2 Matt Black	1 3000K 2 4000K 3 5000K 5 2700K	1 On and off 2 1~10V dimmable 3 Dali

LED Driver
LED Colour
Finish



DG31161


CE

RoHS

IP20

III


ERP



Power: 15W (350mA/36V)
Lamp: SAMSUNG SMD (CRI>80)
DC: 48V

Beam Angle	Model	Lumen	Finish	LED Colour	LED Driver
36°	DG31161.2	1370lm	1 Matt White 2 Matt Black	1 3000K 2 4000K 3 5000K 5 2700K	1 On and off 2 1~10V dimmable 3 Dali

LED Driver
LED Colour
Finish



DG31311


CE

RoHS

IP20

III


ERP



Power: 30W (700mA/36V)
Lamp: SAMSUNG SMD (CRI>80)
DC: 48V

Beam Angle	Model	Lumen	Finish	LED Colour	LED Driver
36°	DG31311.2	1900lm	1 Matt White 2 Matt Black	1 3000K 2 4000K 3 5000K 5 2700K	1 On and off 2 1~10V dimmable 3 Dali

LED Driver
LED Colour
Finish



Features

- 1. Work on 48V low voltage with safety. On/off, DALI, 0-10V optional.
- 2. Simplified design, with beauty and adaptation to different atmosphere. Finish in matt white and black as optional.
- 3. Anti-dazzle ring can be made in black, white, silver and gold.
- 4. 0-180° tilting vertically.

Application

Shopping mall, hotel.



High lumen

90lm/W

50000hrs

50000

More watt (7-30W)

More sizes

IP20

IP Level

More CCT




DG33081

CE

IP20

ERP




Power: 7W (200mA/36V)
Lamp: SAMSUNG SMD (CRI>80)
DC: 48V

Beam Angle	Model	Lumen	Finish	LED Colour	LED Driver
36°	DG33081.2	650lm	1 Matt White 2 Matt Black	1 3000K 2 4000K 3 5000K 5 2700K	1 On and off 2 1~10V dimmable 3 Dali

LED Driver

LED Colour

Finish




DG33161

CE

IP20

ERP




Power: 15W (350mA/36V)
Lamp: SAMSUNG SMD (CRI>80)
DC: 48V

Beam Angle	Model	Lumen	Finish	LED Colour	LED Driver
36°	DG33161.2	1370lm	1 Matt White 2 Matt Black	1 3000K 2 4000K 3 5000K 5 2700K	1 On and off 2 1~10V dimmable 3 Dali

LED Driver

LED Colour

Finish




DG33311

CE

IP20

ERP




Power: 30W (700mA/36V)
Lamp: SAMSUNG SMD (CRI>80)
DC: 48V

Beam Angle	Model	Lumen	Finish	LED Colour	LED Driver
36°	DG33311.2	1900lm	1 Matt White 2 Matt Black	1 3000K 2 4000K 3 5000K 5 2700K	1 On and off 2 1~10V dimmable 3 Dali

LED Driver

LED Colour

Finish





Main Voltage 230V Track Lights

With high quality aluminum body and technical painting, all for durable and professional lighting.

A full range of products, with optional accessories,
is for a maximum application to different environmental requirement.
Genuine imported LED and glued built-in driver, provide
free maintenance and high energy efficiency.

Precisely designed reflector with anti-glare, and anodized layer,
creates a visible comfortable and healthy light output

Features

- 1. 0-350°rotating horizontally, 0-90°tilting vertically.
- 2. Simplified design with driver embedded in, with beauty and adaptation to different atmosphere. Finish in matt white and black as optional.
- 3. Anti-glare ring available in white, black, silver & golden etc.
- 4. Beam angle in 20°, 30° and 40°.

Application

Shopping mall, hotel.



High lumen

90lm/W

50000

50000hrs

More watt (5-32W)

More sizes

IP20

IP Level

350°

350° horizontally

90°

90° vertically


More CCT



Power: 5W (350mA/9V)
Lamp: EPISTAR COB (CRI>80)
AC: 200-240V

Beam Angle	Model	Lumen	Finish	LED Colour	LED Driver
18°	DG30055.1_ _ _	380lm	1 Matt White 2 Matt Black 3 Silver	1 3000K 2 4000K 3 5000K	1 On and off 2 Triac dimmable
24°	DG30055.2_ _ _	380lm			
36°	DG30055.3_ _ _	380lm		4 2000K 5 2700K	

LED Driver
LED Colour
Finish

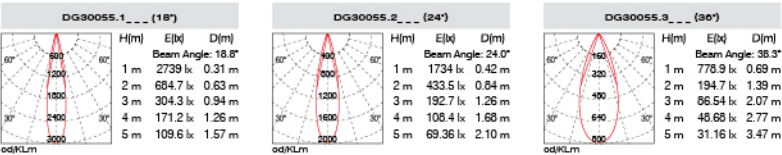


DG30055

Power: 8W (150mA/36V)
Lamp: CITIZEN COB (CRI>80)
AC: 200-240V

Beam Angle	Model	Lumen	Finish	LED Colour	LED Driver
20°	DG30075.1_ _ _	700lm	1 Matt White 2 Matt Black 3 Silver	1 3000K 2 4000K 3 5000K	1 On and off 2 Triac dimmable
30°	DG30075.2_ _ _	700lm			
40°	DG30075.3_ _ _	700lm		4 2000K - 2800K 5 2700K	

LED Driver
LED Colour
Finish

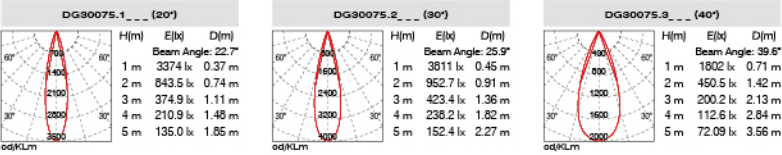


DG30075

Stena

Integrated Driver Track Light




DG30125




Power: 14W (300mA/36V)
Lamp: CITIZEN COB (CRI>80)
AC: 200-240V

Beam Angle	Model	Lumen	Finish	LED Colour	LED Driver
20°	DG30125.1_---	1200lm	1 Matt White	1 3000K	1 On and off
			2 Matt Black	2 4000K	2 Triac dimmable
			3 Silver	3 5000K	
30°	DG30125.2_---	1200lm		4 2000K - 2800K Dim to warm	
				5 2700K	
40°	DG30125.3_---	1200lm			

LED Driver
LED Colour
Finish

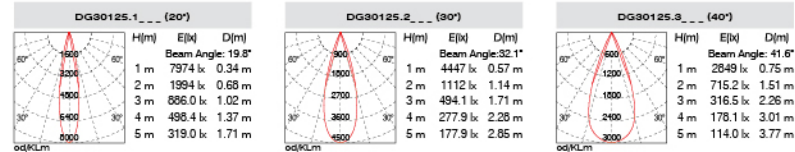


DG30185




Power: 22W (500mA/36V)
Lamp: CITIZEN COB (CRI>80)
AC: 200-240V

Beam Angle	Model	Lumen	Finish	LED Colour	LED Driver
20°	DG30185.1_---	2050lm	1 Matt White	1 3000K	1 On and off
			2 Matt Black	2 4000K	2 Triac dimmable
			3 Silver	3 5000K	
30°	DG30185.2_---	2050lm		4 2000K - 2800K Dim to warm	
				5 2700K	
40°	DG30185.3_---	2050lm			

LED Driver
LED Colour
Finish

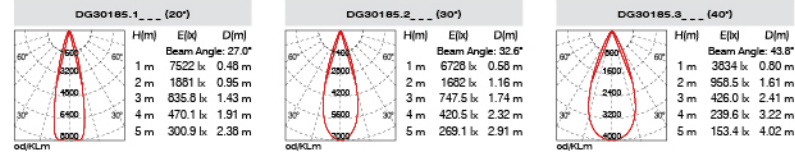


DG30285



Power: 32W (700mA/36V)
Lamp: CITIZEN COB (CRI>80)
AC: 200-240V

Beam Angle	Model	Lumen	Finish	LED Colour	LED Driver
20°	DG30285.1_---	2700lm	1 Matt White	1 3000K	1 On and off
			2 Matt Black	2 4000K	2 Triac dimmable
			3 Silver	3 5000K	
30°	DG30285.2_---	2700lm		4 2000K - 2800K Dim to warm	
				5 2700K	
40°	DG30285.3_---	2700lm			

LED Driver
LED Colour
Finish

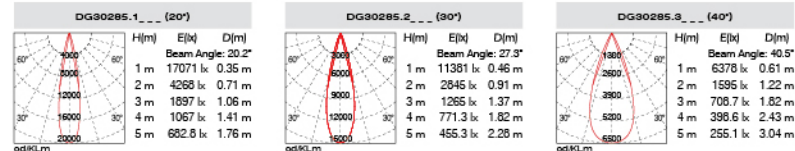

Features

- 1. 0-350°rotating horizontally, 0-90°tilting vertically.
- 2. Simplified design with driver integrated inside adaptor, with beauty and adaptation to different atmosphere. Finish in matt white and black as optional.
- 3. Anti-glare ring available in white, black, silver & golden etc.
- Lens optional for interchange.
- 4. Beam angle in 20°, 30° and 40°.

Application

Shopping mall, hotel.



High lumen

90lm/W

50000

50000hrs

More watt (11-38W)

More sizes

IP20

IP Level

350°

350° horizontally

90°

90° vertically

More CCT



CE

IP20

ERP

11W

250mA/36V

CITIZEN COB (CRI>80)

200-240V

Beam Angle	Model	Lumen	Finish	LED Colour	LED Driver
20°	DG31075.1_ _ _	900lm	1 Matt White 2 Matt Black 3 Silver	1 3000K 2 4000K 3 5000K	1 On and off 2 Triac dimmable 3 1~10V dimmable
30°	DG31075.2_ _ _	900lm		4 2000K - 2800K Dim to warm 5 2700K	
40°	DG31075.3_ _ _	900lm			

LED Driver

LED Colour

Finish

DG31075.1_ _ _ (20°)

DG31075.2_ _ _ (30°)

DG31075.3_ _ _ (40°)

DG31075

CE

IP20

ERP

17W

400mA/36V

CITIZEN COB (CRI>80)

200-240V

Beam Angle	Model	Lumen	Finish	LED Colour	LED Driver
20°	DG31125.1_ _ _	1630lm	1 Matt White 2 Matt Black 3 Silver	1 3000K 2 4000K 3 5000K	1 On and off 2 Triac dimmable 3 1~10V dimmable
30°	DG31125.2_ _ _	1630lm		4 2000K - 2800K Dim to warm 5 2700K	4 Dali
40°	DG31125.3_ _ _	1630lm			

LED Driver

LED Colour

Finish

DG31125.1_ _ _ (20°)

DG31125.2_ _ _ (30°)

DG31125.3_ _ _ (40°)


DG31125

Stena

Driver in Adaptor Track Light




DG31185




Power: 27W (600mA/36V)
Lamp: CITIZEN COB (CRI>80)
AC: 200-240V

Beam Angle	Model	Lumen	Finish	LED Colour	LED Driver
20°	DG31185.1_	2400lm	1 Matt White	1 3000K	1 On and off
30°	DG31185.2_	2400lm	2 Matt Black	2 4000K	2 Triac dimmable
40°	DG31185.3_	2400lm	3 Silver	3 5000K	3 1~10V dimmable
				4 2000K - 2800K Dim to warm	4 Dali
				5 2700K	

LED Driver
LED Colour
Finish

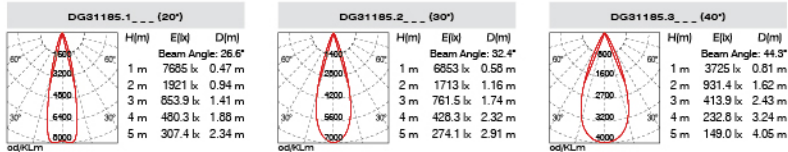


DG31285



Power: 38W (900mA/36V)
Lamp: CITIZEN COB (CRI>80)
AC: 200-240V

Beam Angle	Model	Lumen	Finish	LED Colour	LED Driver
20°	DG31285.1_	3400lm	1 Matt White	1 3000K	1 On and off
30°	DG31285.2_	3400lm	2 Matt Black	2 4000K	2 Triac dimmable
40°	DG31285.3_	3400lm	3 Silver	3 5000K	3 1~10V dimmable
				4 2000K - 2800K Dim to warm	4 Dali
				5 2700K	

LED Driver
LED Colour
Finish

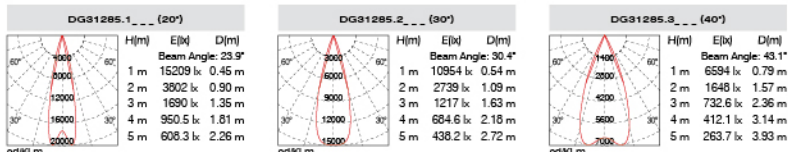

Features

- 1. 350°rotating horizontally,90°tilting vertically .
- 2. Driver inside the separate drive box which more safe and reliable ; Matt balck and matt white are available .
- 3. Anti-glare ring interchangeable; Black/White/Silver/Golden color for option . Lens can be interchangeable too.
- 4. Beam angle of 20 degree, 30 degree , 40 degree for option.

Application

Shopping mall, hotel, exhibition hall, museum, jewellery shop etc.



High lumen

90lm/W

50000

50000hrs

More watt (11-38W)

More sizes

IP20

IP Level

350°

350° horizontally

90°

90° vertically

More CCT



Power: 11W (250mA/36V)

Lamp: CITIZEN COB (CRI>80)

AC: 200-240V

Beam Angle	Model	Lumen	Finish	LED Colour	LED Driver
20°	DG31076.1_ _ _	900lm	1 Matt White 2 Matt Black 3 Silver	1 3000K 2 4000K 3 5000K	1 On and off 2 Triac dimmable
30°	DG31076.2_ _ _	900lm		4 2000K - 2800K Dim to warm 5 2700K	
40°	DG31076.3_ _ _	900lm			

LED Driver
LED Colour
Finish

DG31076.1_ _ _ (20°)

DG31076.2_ _ _ (30°)

DG31076.3_ _ _ (40°)

DG31076

Power: 17W (400mA/36V)

Lamp: CITIZEN COB (CRI>80)

AC: 200-240V

Beam Angle	Model	Lumen	Finish	LED Colour	LED Driver
20°	DG31126.1_ _ _	1630lm	1 Matt White 2 Matt Black 3 Silver	1 3000K 2 4000K 3 5000K	1 On and off 2 Triac dimmable
30°	DG31126.2_ _ _	1630lm		4 2000K - 2800K Dim to warm 5 2700K	
40°	DG31126.3_ _ _	1630lm			

LED Driver
LED Colour
Finish

DG31126.1_ _ _ (20°)

DG31126.2_ _ _ (30°)

DG31126.3_ _ _ (40°)


DG31126

Stena


Driver in Junction Box Track Light




DG31186




Power: 27W (600mA/36V) Lamp: CITIZEN COB (CRI>80) AC: 200-240V				
Beam Angle	Model	Lumen	Finish	LED Colour
20°	DG31186.1_	2400lm	1 Matt White	1 3000K
30°	DG31186.2_	2400lm	2 Matt Black	2 4000K
40°	DG31186.3_	2400lm	3 Silver	3 5000K
				4 2000K - 2800K Dim to warm
				5 2700K

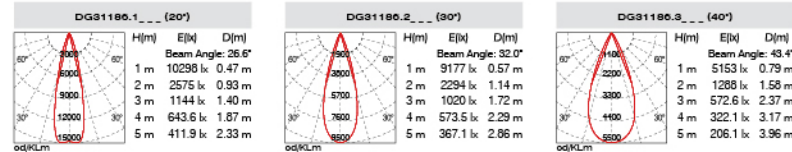

DG31286



Power: 38W (900mA/36V) Lamp: CITIZEN COB (CRI>80) AC: 200-240V				
Beam Angle	Model	Lumen	Finish	LED Colour
20°	DG31286.1_	3400lm	1 Matt White	1 3000K
30°	DG31286.2_	3400lm	2 Matt Black	2 4000K
40°	DG31286.3_	3400lm	3 Silver	3 5000K
				4 2000K - 2800K Dim to warm
				5 2700K

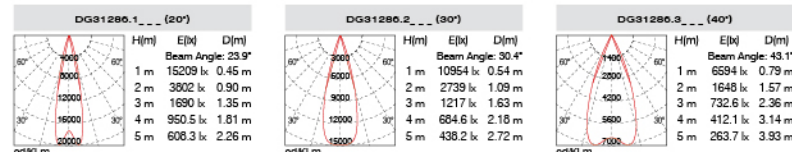

Features

- 1. 350°rotating horizontally,90°tilting vertically .
- 2. Driver inside the separate drive box which more safe and reliable ; Matt baick and matt white are vailable .
- 3. Anti-glare ring interchangibleable; Black/Whitie/Sliver/Golden color for option . Lens can be interchangibleable too.
- 4. Beam angle of 20 degree, 30 degree , 40 degree for option.

Application

Shopping mall, hotel, exhibition hall, museum, jewellery shop etc.



High lumen	90lm/W	50000	50000hrs		More watt (11-38W)		More sizes
IP20	IP Level		350° horizontally		90° vertically		More CCT












Accessories and optional Reflectors


Lamp \ Accessories & Reflectors					 15°	 24°	 36°
DG30053						B0094	B0095
DG30051					WG0249	WG0251	WG0250
DG30093					WG0249	WG0251	WG0250
DG30133					WG0249	WG0251	WG0250
DG30154	SZ-014		SZ-013		B0083	B0084/B0109	B0085/B0110
DG30204	SZ-014		SZ-013		B0083	B0084/B0109	B0085/B0110
DG30304	SZ-005	SZ-006	SZ-007	SZ-008	WG0242	WG0239	WG0241
DG30404	SZ-009	SZ-010	SZ-011	SZ-012	WG0243	WG0240	WG0244

Installation Manual

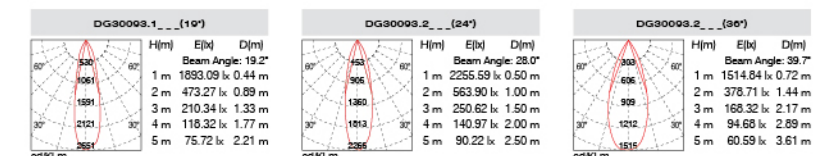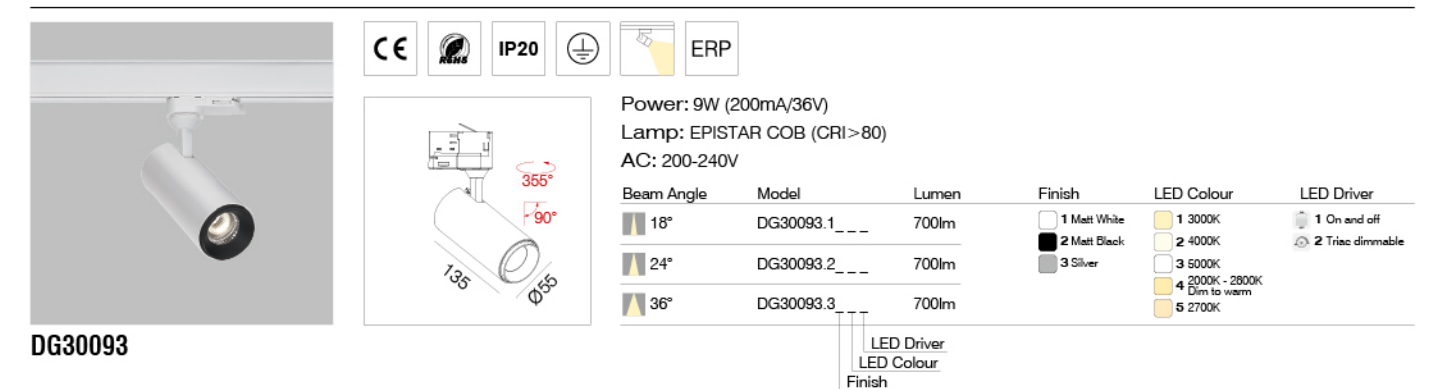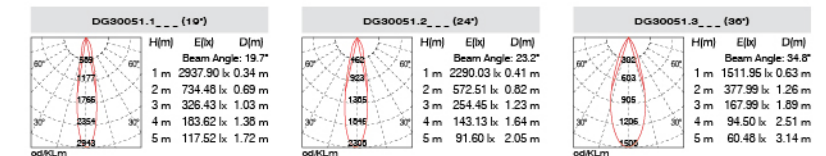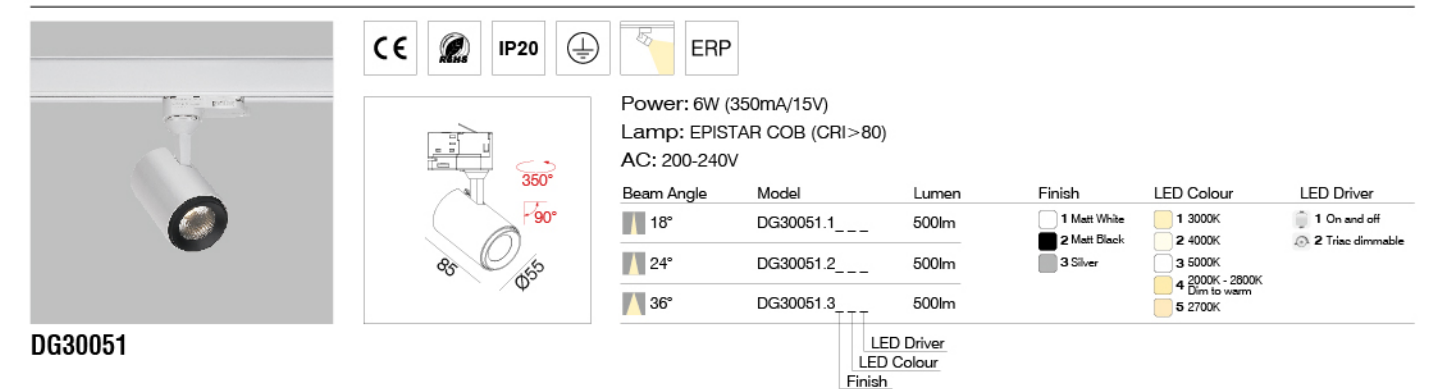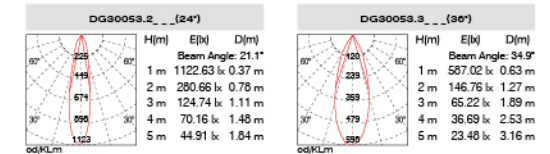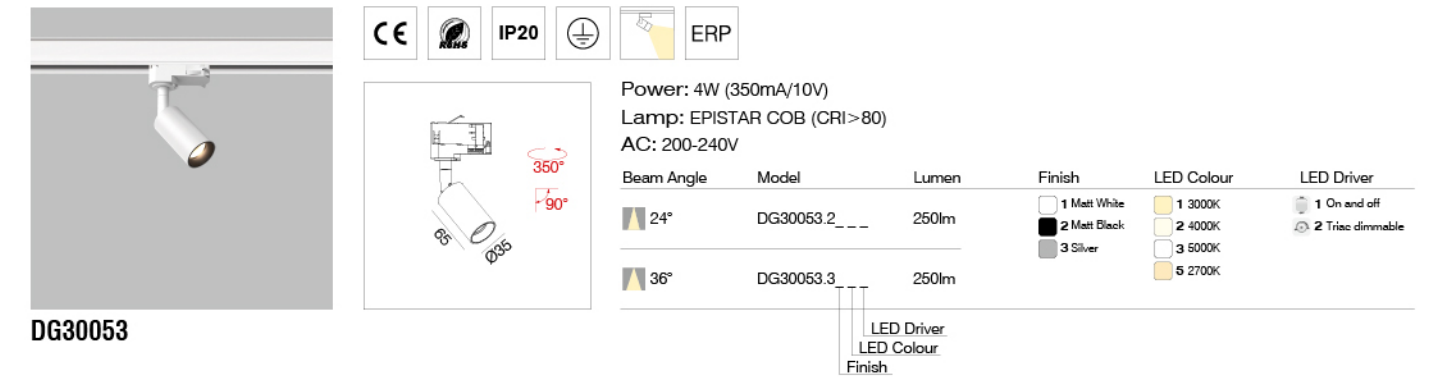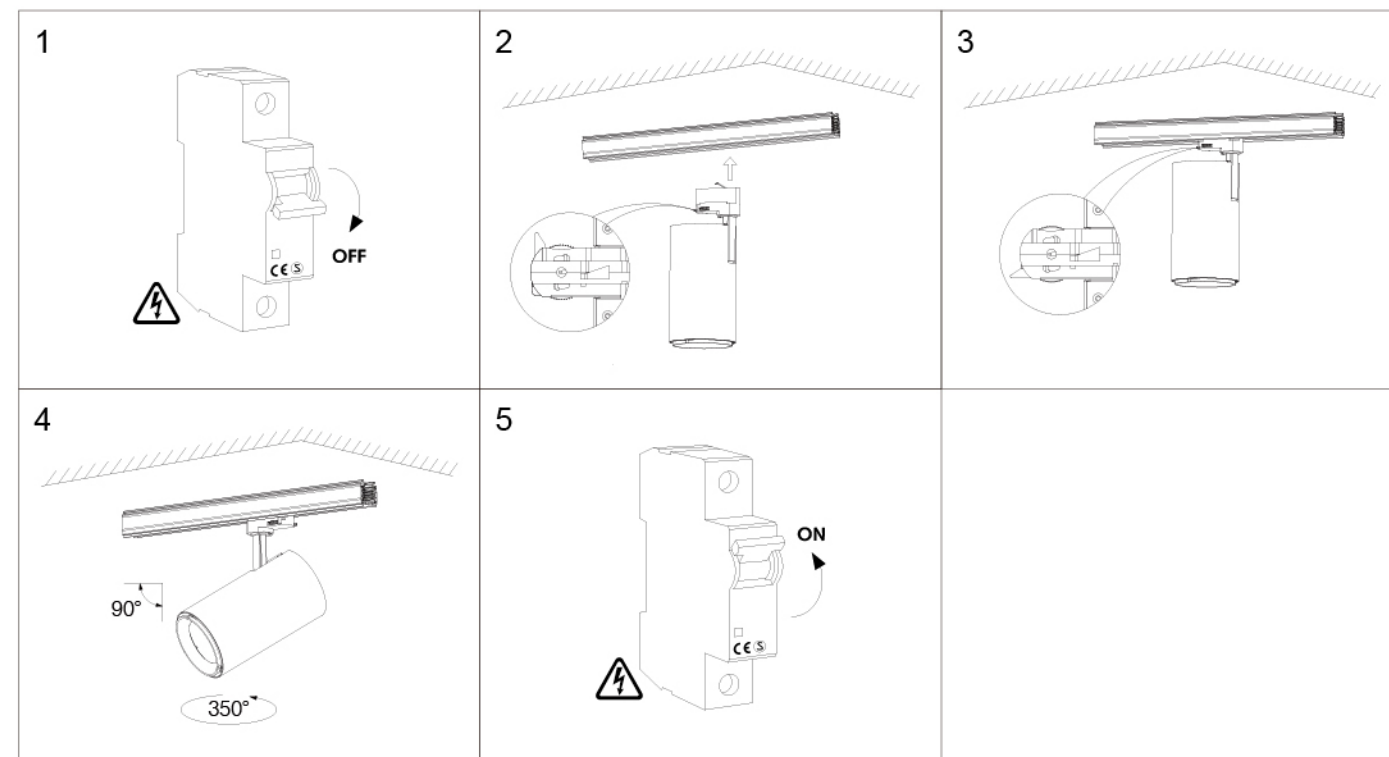




DG30133




Power: 13W (300mA/36V)
Lamp: Bridgelux COB (CRI>80)
AC: 200-240V

Beam Angle	Model	Lumen	Finish	LED Colour	LED Driver
18°	DG30133.1_	1000lm	1 Matt White	1 3000K	1 On and off
24°	DG30133.2_	1000lm	2 Matt Black	2 4000K	2 Triac dimmable
36°	DG30133.3_	1000lm	3 Silver	3 5000K	
				4 2000K - 2800K Dim to warm	
				5 2700K	

LED Driver
LED Colour
Finish

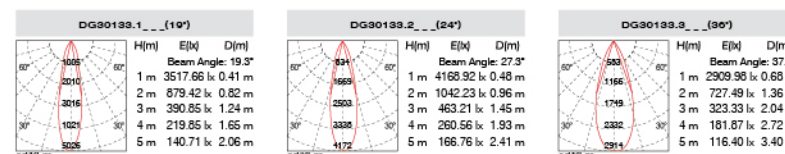


DG30154




Power: 15W (350mA/36V)
Lamp: Bridgelux COB (CRI>80)
AC: 200-240V

Beam Angle	Model	Lumen	Finish	LED Colour	LED Driver
24°	DG30154.2_	1300lm	1 Matt White	1 3000K	1 On and off
36°	DG30154.3_	1300lm	2 Matt Black	2 4000K	2 Triac dimmable
			3 Silver	3 5000K	
				4 2000K - 2800K Dim to warm	
				5 2700K	

LED Driver
LED Colour
Finish

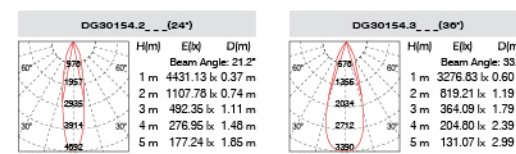


DG30204




Power: 20W (500mA/36V)
Lamp: Bridgelux COB (CRI>80)
AC: 200-240V

Beam Angle	Model	Lumen	Finish	LED Colour	LED Driver
24°	DG30204.2_	1900lm	1 Matt White	1 3000K	1 On and off
36°	DG30204.3_	1900lm	2 Matt Black	2 4000K	2 Triac dimmable
			3 Silver	3 5000K	
				4 2000K - 2800K Dim to warm	
				5 2700K	

LED Driver
LED Colour
Finish

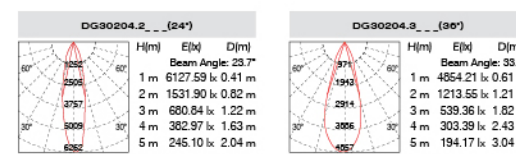


DG30304




Power: 30W (700mA/36V)
Lamp: Bridgelux COB (CRI>80)
AC: 200-240V

Beam Angle	Model	Lumen	Finish	LED Colour	LED Driver
15°	DG30304.1_	2780lm	1 Matt White	1 3000K	1 On and off
24°	DG30304.2_	2780lm	2 Matt Black	2 4000K	2 Triac dimmable
36°	DG30304.3_	2780lm	3 Silver	3 5000K	
				4 2000K - 2800K Dim to warm	
				5 2700K	

LED Driver
LED Colour
Finish

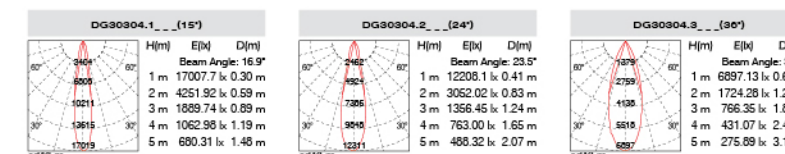


DG30404



Power: 40W (900mA/36V)
Lamp: Bridgelux COB (CRI>80)
AC: 200-240V

Beam Angle	Model	Lumen	Finish	LED Colour	LED Driver
12°	DG30404.1_	3240lm	1 Matt White	1 3000K	1 On and off
24°	DG30404.2_	3240lm	2 Matt Black	2 4000K	2 Triac dimmable
36°	DG30404.3_	3240lm	3 Silver	3 5000K	
				4 2000K - 2800K Dim to warm	
				5 2700K	

LED Driver
LED Colour
Finish

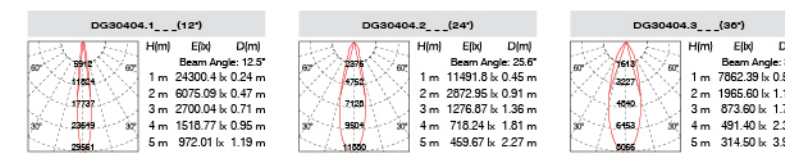

Features

- 1.Imported COB/LED light source in original factory package, high CRI, high efficient, high illumination,energy saving and environmental protection, create a comfortable atmosphere of lighting, long lifespan up to 50,000 hours.
- 2.The lamp body can be rotated horizontally at 350 °, vertically at 90°, accurate positioning, adjustable for multi-directions.
- 3.Self-designed reflector with special optics, precise light distribution and high lumen output, no-glare, soft and tender light, with high transparency protective cover, and extra reflectors in different angles are optional.
- 4.Unique design, adopt the high-quality aluminum alloy as die-casting material, good heat dissipation design by front and rear double ventilation.
- 5. Various power options for different lighting requirements.

Application

Shopping mall, hotel, exhibition hall, museum, jewellery shop etc.



High lumen

90lm/W

50000

50000hrs

More watt (20-40W)

More sizes

IP20

IP Level

350°

350° horizontally

90°

90° vertically

More CCT



Accessories and optional Reflectors

Accessories & Reflectors Lamp							
					15°	24°	36°
DG14202	SZ-001	SZ-002	SZ-003	SZ-004	B0089	B0090	B0091
DG14302	SZ-001	SZ-002	SZ-003	SZ-004	B0089	B0090	B0091
DG14402	SZ-001	SZ-002	SZ-003	SZ-004	B0089	B0090	B0091

Installation Manual

1

2

3

4


5

Lunar

Driver in Junction Box Track Light




DG14202




Power: 20W (500mA/36V)
Lamp: Bridgelux COB (CRI>80)
AC: 200-240V

Beam Angle	Model	Lumen	Finish	LED Colour	LED Driver
15°	DG14202.1_ _ _	2090lm	1 Matt White 2 Matt Black 3 Silver	1 3000K 2 4000K 3 5000K	1 On and off 2 Triac dimmable
24°	DG14202.2_ _ _	2090lm		4 2000K - 2800K Dim to warm 5 2700K	
36°	DG14202.3_ _ _	2090lm			

LED Driver
LED Colour
Finish

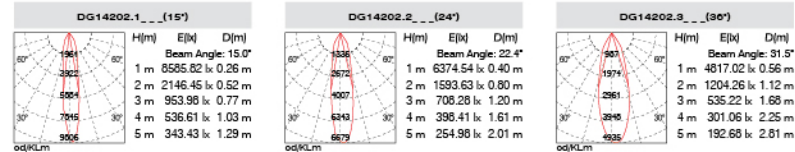


DG14302




Power: 30W (700mA/36V)
Lamp: Bridgelux COB (CRI>80)
AC: 200-240V

Beam Angle	Model	Lumen	Finish	LED Colour	LED Driver
15°	DG14302.1_ _ _	2670lm	1 Matt White 2 Matt Black 3 Silver	1 3000K 2 4000K 3 5000K	1 On and off 2 Triac dimmable
24°	DG14302.2_ _ _	2670lm		4 2000K - 2800K Dim to warm 5 2700K	
36°	DG14302.3_ _ _	2670lm			

LED Driver
LED Colour
Finish

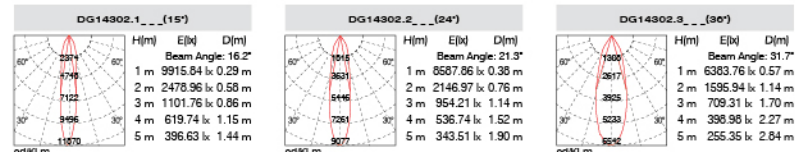


DG14402



Power: 40W (900mA/36V)
Lamp: Bridgelux COB (CRI>80)
AC: 200-240V

Beam Angle	Model	Lumen	Finish	LED Colour	LED Driver
15°	DG14402.1_ _ _	3060lm	1 Matt White 2 Matt Black 3 Silver	1 3000K 2 4000K 3 5000K	1 On and off 2 Triac dimmable
24°	DG14402.2_ _ _	3060lm		4 2000K - 2800K Dim to warm 5 2700K	
36°	DG14402.3_ _ _	3060lm			

LED Driver
LED Colour
Finish

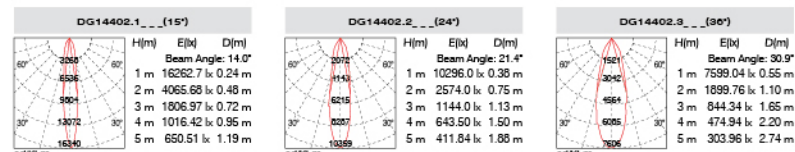

Features

- 1. Imported COB/LED light source in original factory package, high CRI, high efficient, high illumination,energy saving and environmental protection, create a comfortable atmosphere of lighting, long lifespan up to 50,000 hours.
- 2. The lamp body can be rotated horizontally at 350°, vertically at 90°, accurate positioning, adjustable for multi-directions.
- 3. Self-designed reflector with special optics, precise light distribution and high lumen output, no-glare, soft and tender light, with high transparency protective cover, and extra reflectors in different angles are optional.
- 4. Excellent integrated design with very compact height, the shape is simple and graceful, adopt the high-quality aluminum alloy as die-casting material, good heat dissipation design by front and rear double ventilation.
- 5. Various power options for different lighting requirements.

Application

Shopping mall, hotel, exhibition hall, museum, jewellery shop etc.



High lumen

90lm/W

50000

50000hrs

More watt (20-45W)

More sizes

IP20

IP Level

350°

350° horizontally

90°

90° vertically

More CCT



Accessories and optional Reflectors

Accessories & Reflectors Lamp							
					15°	24°	36°
DG31202	SZ-014			SZ-013	B0083	B0084/B0109	B0085/B0110
DG31302	SZ-005			SZ-007	WG0242	WG0239	WG0241
DG31402	SZ-009	SZ-010	SZ-011	SZ-012	WG0243	WG0240	WG0244
DG31452	SZ-009	SZ-010	SZ-011	SZ-012	WG0243	WG0240	WG0244

Installation Manual

1

2


3

4

5




DG31202




Power: 20W (500mA/36V)
Lamp: Bridgelux COB (CRI>80)
AC: 200-240V

Beam Angle	Model	Lumen	Finish	LED Colour	LED Driver
24°	DG31202.2_	1900lm	1 Matt White 2 Matt Black 3 Silver	1 3000K 2 4000K 3 5000K	1 On and off 2 Triac dimmable
36°	DG31202.3_	1900lm		4 2000K - 2800K Dim to warm 5 2700K	

LED Driver
LED Colour
Finish

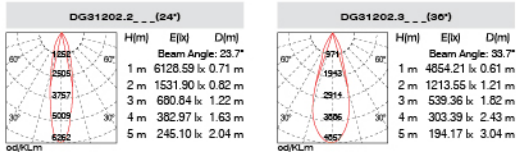


DG31302




Power: 30W (700mA/36V)
Lamp: Bridgelux COB (CRI>80)
AC: 200-240V

Beam Angle	Model	Lumen	Finish	LED Colour	LED Driver
15°	DG31302.1_	2780lm	1 Matt White 2 Matt Black 3 Silver	1 3000K 2 4000K 3 5000K	1 On and off 2 Triac dimmable
24°	DG31302.2_	2780lm		4 2000K - 2800K Dim to warm 5 2700K	
36°	DG31302.3_	2780lm			

LED Driver
LED Colour
Finish

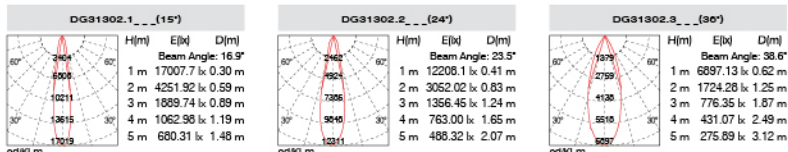


DG31402




Power: 40W (900mA/36V)
Lamp: Bridgelux COB (CRI>80)
AC: 200-240V

Beam Angle	Model	Lumen	Finish	LED Colour	LED Driver
13°	DG31402.1_	3240lm	1 Matt White 2 Matt Black 3 Silver	1 3000K 2 4000K 3 5000K	1 On and off 2 Triac dimmable
24°	DG31402.2_	3240lm		4 2000K - 2800K Dim to warm 5 2700K	
36°	DG31402.3_	3240lm			

LED Driver
LED Colour
Finish

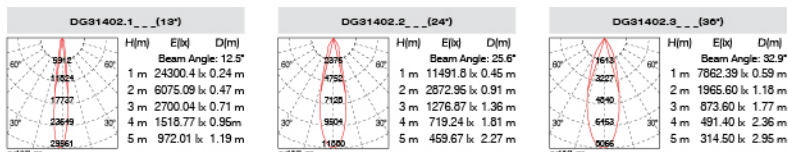


DG31452



Power: 45W (1050mA/36V)
Lamp: Bridgelux COB (CRI>80)
AC: 200-240V

Beam Angle	Model	Lumen	Finish	LED Colour	LED Driver
13°	DG31452.1_	3680lm	1 Matt White 2 Matt Black 3 Silver	1 3000K 2 4000K 3 5000K	1 On and off 2 Triac dimmable
24°	DG31452.2_	3680lm		4 2000K - 2800K Dim to warm 5 2700K	
36°	DG31452.3_	3680lm			

LED Driver
LED Colour
Finish

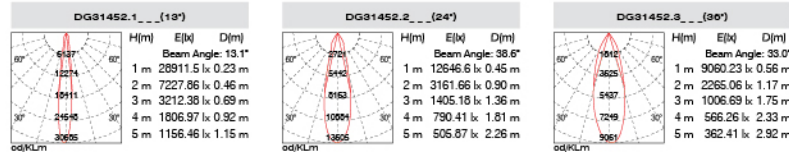

Features

- 1. With high quality raw materials and surface treatment.
- 2. GU10 and anti-glare ring interchangeable freely ; Black , White , Silver , Golden finish for option.

Application

Shopping mall, hotel.



Anti- glare ring can be changed






CE



IP20







Finish:

☐ 1 Matt White


☒ 2 Matt Black

☐ 3 Silver

GU10

Max 10W, bulb not include

DG34001

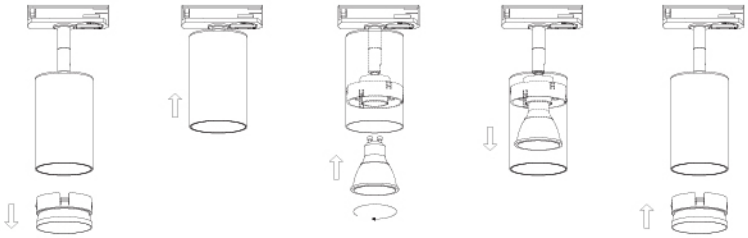

Features

- 1. Recessed design , On-off , triac dimmable, DALI,0-10V for option.
- 2. 0-350° rotating horizontally, 0-90° tilting vertically.
- 3. Anti-glare ring interchangeable; Black, White , Silver, Golden finish for option . Lens can be interchangeable too
- 4. Beam angle in 20°, 30° and 40°.

Application

Shopping mall, hotel.



High lumen

90lm/W

50000

50000hrs

More watt (5-30W)

More sizes

IP20

IP Level


350°

350° horizontally

90°

90° vertically

More CCT

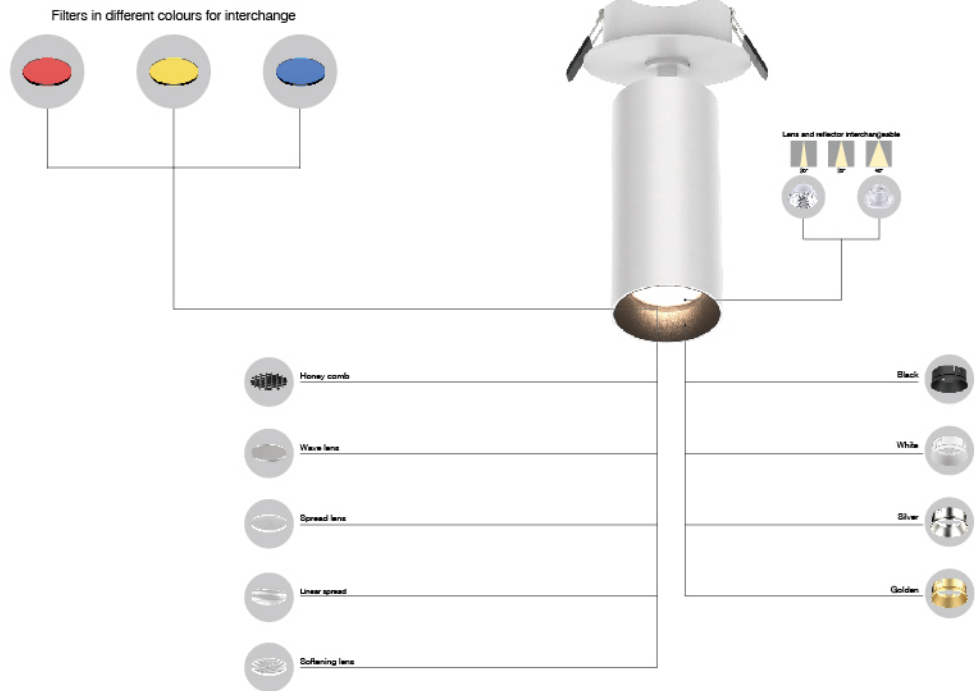


TC30055



Power: 5W (350mA/9V)
Lamp: EPISTAR COB (CRI>80)
AC: 200-240V

Beam Angle	Model	Lumen	Finish	LED Colour	LED Driver
18°	TC30055.1_ _ _	380lm	1 Matt White 2 Matt Black 3 Silver	1 3000K 2 4000K 3 5000K	1 On and off 2 Triac dimmable 3 1~10V dimmable
24°	TC30055.2_ _ _	380lm		4 2700K	4 Dali
36°	TC30055.3_ _ _	380lm			5 Bluetooth

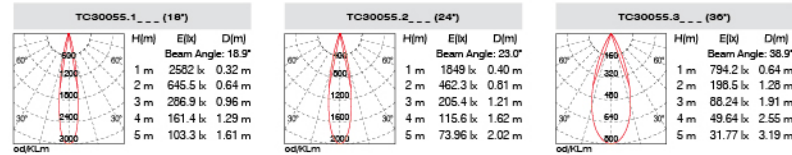


TC30075



Power: 10W (250mA/36V)
Lamp: CITIZEN COB (CRI>80)
AC: 200-240V

Beam Angle	Model	Lumen	Finish	LED Colour	LED Driver
20°	TC30075.1_ _ _	900lm	1 Matt White 2 Matt Black 3 Silver	1 3000K 2 4000K 3 5000K	1 On and off 2 Triac dimmable 3 1~10V dimmable
30°	TC30075.2_ _ _	900lm		4 2000K - 2800K Dim to warm	4 Dali
40°	TC30075.3_ _ _	900lm		5 2700K	5 Bluetooth

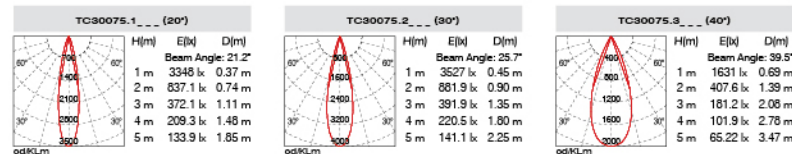


TC30125



Power: 15W (350mA/36V)
Lamp: CITIZEN COB (CRI>80)
AC: 200-240V

Beam Angle	Model	Lumen	Finish	LED Colour	LED Driver
20°	TC30125.1_ _ _	1630lm	1 Matt White 2 Matt Black 3 Silver	1 3000K 2 4000K 3 5000K	1 On and off 2 Triac dimmable 3 1~10V dimmable
30°	TC30125.2_ _ _	1630lm		4 2000K - 2800K Dim to warm	4 Dali
40°	TC30125.3_ _ _	1630lm		5 2700K	5 Bluetooth

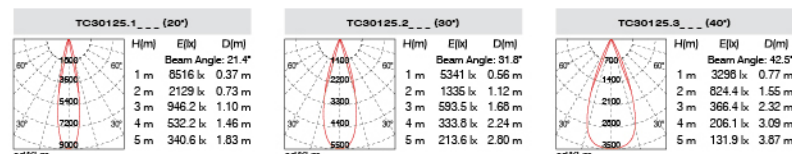


Tuna

Ceilling Recessed Light




TC30185



Power: 25W (600mA/36V)
Lamp: CITIZEN COB (CRI>80)
AC: 200-240V

Beam Angle	Model	Lumen	Finish	LED Colour	LED Driver
20°	TC30185.1	2400lm	1 Matt White 2 Matt Black 3 Silver	1 3000K 2 4000K 3 5000K	1 On and off 2 Triac dimmable 3 1~10V dimmable
30°	TC30185.2	2400lm		4 2000K - 2800K Dim to warm 5 2700K	4 Dali 5 Bluetooth
40°	TC30185.3	2400lm			

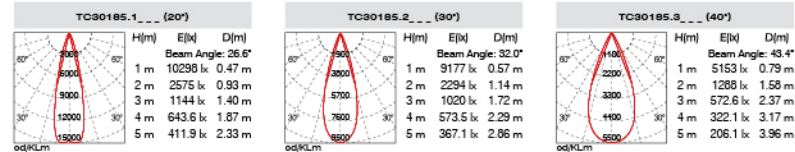


TC30285



Power: 38W (900mA/36V)
Lamp: CITIZEN COB (CRI>80)
AC: 200-240V

Beam Angle	Model	Lumen	Finish	LED Colour	LED Driver
20°	TC30285.1	3400lm	1 Matt White 2 Matt Black 3 Silver	1 3000K 2 4000K 3 5000K	1 On and off 2 Triac dimmable 3 1~10V dimmable
30°	TC30285.2	3400lm		4 2000K - 2800K Dim to warm 5 2700K	4 Dali 5 Bluetooth
40°	TC30285.3	3400lm			

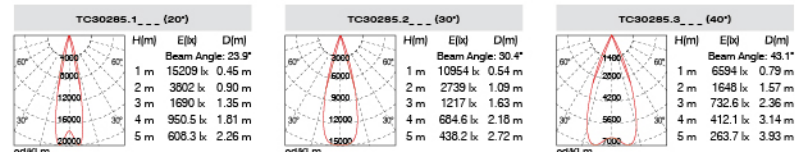

Features


- 1. Recessed design with one or two head for our choices, On-off, triac dimmable, DALI,0-10V for option.
 - 2. 0-350° rotating horizontally, 0-90° tilting vertically.
 - 3. Anti-glare ring available in white, black, silver & golden etc.
 - 4. Beam angle in 20°, 30° and 40°.
- Lens optional for interchange
- Beam angle in 20°, 30° and 40°.

Application


Shopping mall, hotel.



High lumen 90lm/W	50000 50000hrs	More watt (3-24W)	More sizes
IP20 IP Level	350° 350° horizontally	90° 90° vertically	More CCT

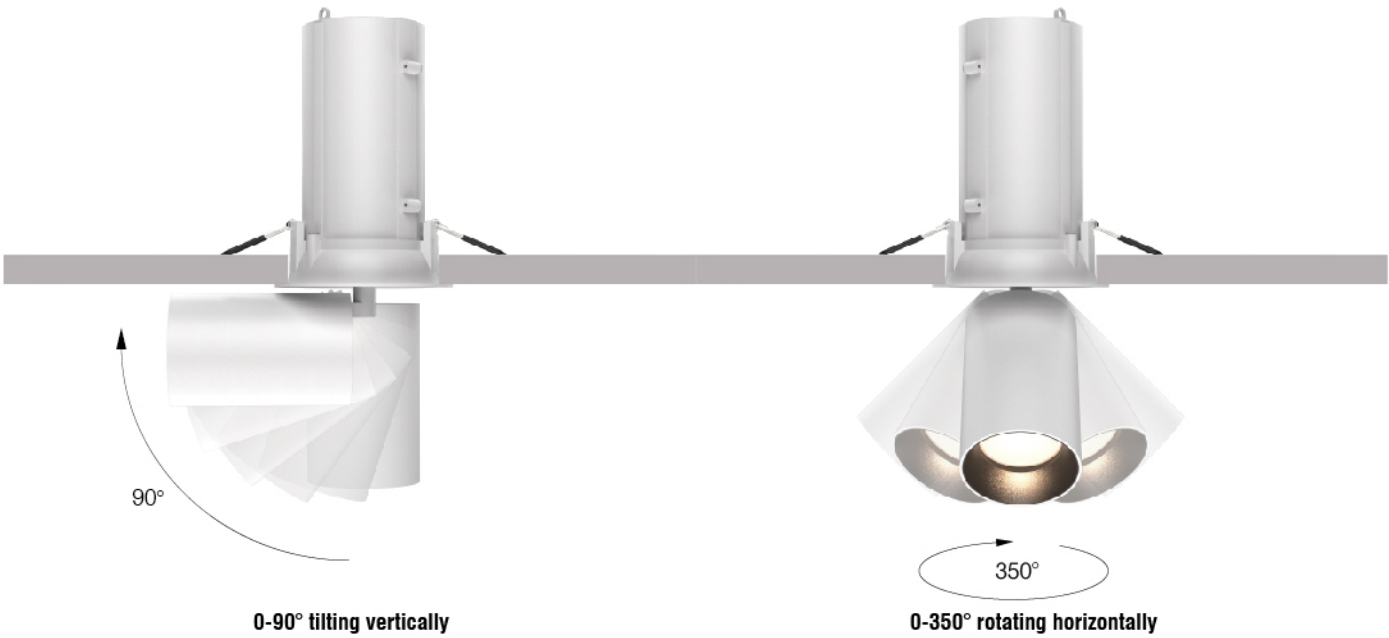


 TC30031 3W(250lm) 48mm	 TC30056 5W(380lm) 65mm	 TC30126 10W(900lm) 83mm
 TC30061 2x5W(760lm) Ø65x65mm	 TC30246 2x12W(1800lm) Ø83x90mm	

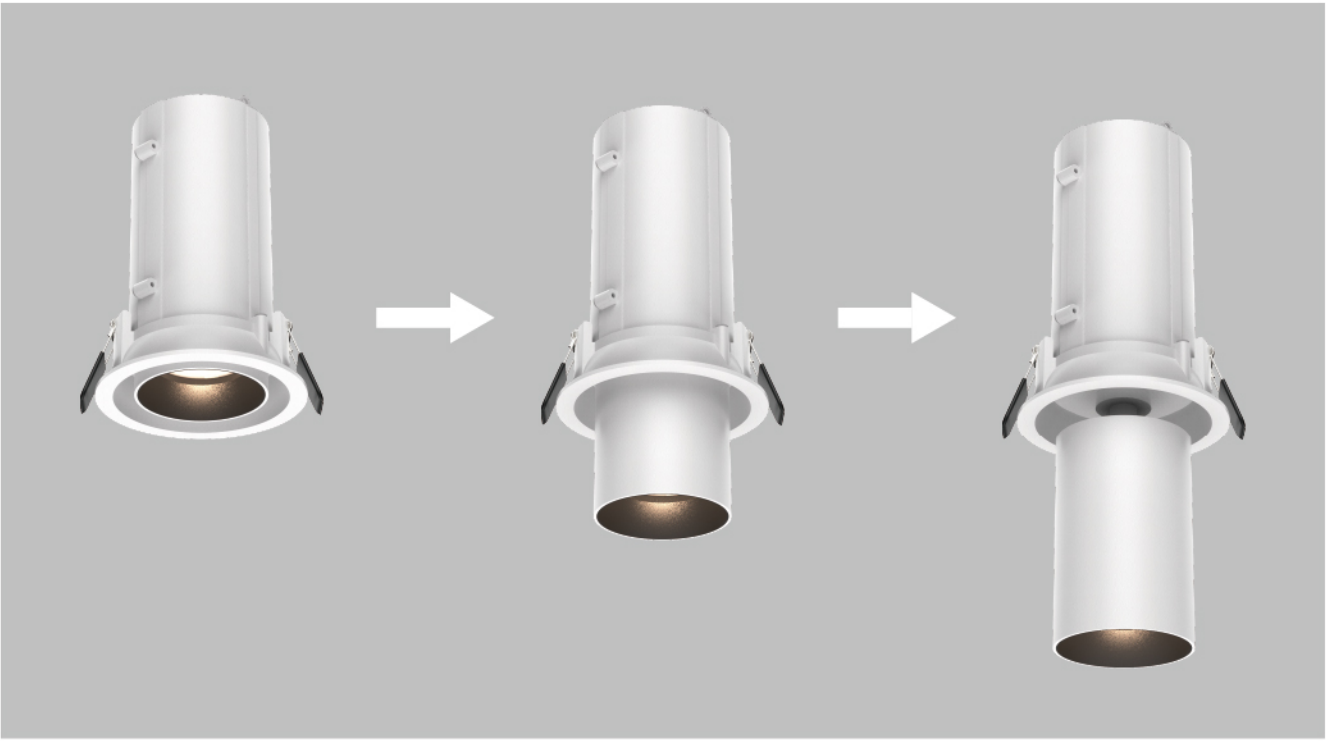




TC30031




Power: 3W (350mA/6V)
Lamp: OSRAM SMD (CRI>80)
AC: 200-240V

Beam Angle	Model	Lumen	Finish	LED Colour	LED Driver
30°	TC30031.2_ _ _	250lm	1 Matt White 2 Matt Black 3 Silver	1 3000K 2 4000K 3 5000K 5 2700K	1 On and off 2 Triac dimmable 3 1~10V dimmable 4 Dali 5 Bluetooth
40°	TC30031.3_ _ _	250lm			

LED Driver
LED Colour
Finish

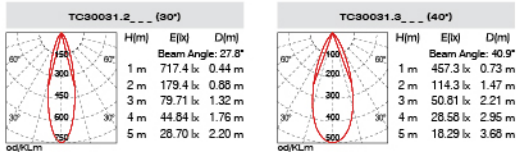


TC30056



Power: 5W (350mA/9V)
Lamp: EPISTAR COB (CRI>80)
AC: 200-240V

Beam Angle	Model	Lumen	Finish	LED Colour	LED Driver
20°	TC30056.1_ _ _	380lm	1 Matt White 2 Matt Black 3 Silver	1 3000K 2 4000K 3 5000K 5 2700K	1 On and off 2 Triac dimmable 3 1~10V dimmable 4 Dali 5 Bluetooth
30°	TC30056.2_ _ _	380lm			
40°	TC30056.3_ _ _	380lm			

LED Driver
LED Colour
Finish

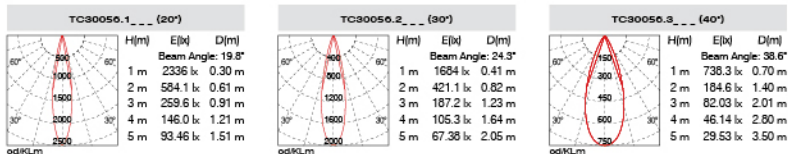


TC30126




Power: 10W (250mA/36V)
Lamp: CITIZEN COB (CRI>80)
AC: 200-240V

Beam Angle	Model	Lumen	Finish	LED Colour	LED Driver
20°	TC30126.1_ _ _	900lm	1 Matt White 2 Matt Black 3 Silver	1 3000K 2 4000K 3 5000K 4 2000K - 2800K Dim to warm 5 2700K	1 On and off 2 Triac dimmable 3 1~10V dimmable 4 Dali 5 Bluetooth
30°	TC30126.2_ _ _	900lm			
40°	TC30126.3_ _ _	900lm			

LED Driver
LED Colour
Finish

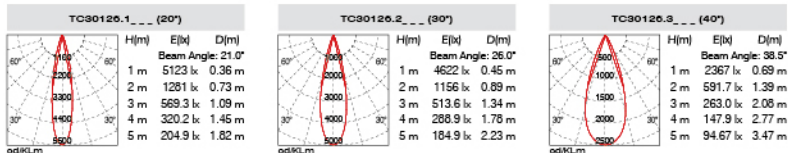


TC30061




Power: 2x5W (350mA/18V)
Lamp: CITIZEN COB (CRI>80)
AC: 200-240V

Beam Angle	Model	Lumen	Finish	LED Colour	LED Driver
20°	TC30061.1_ _ _	760lm	1 Matt White 2 Matt Black 3 Silver	1 3000K 2 4000K 3 5000K 4 2000K - 2800K Dim to warm 5 2700K	1 On and off 2 Triac dimmable 3 1~10V dimmable 4 Dali 5 Bluetooth
30°	TC30061.2_ _ _	760lm			
40°	TC30061.3_ _ _	760lm			

LED Driver
LED Colour
Finish

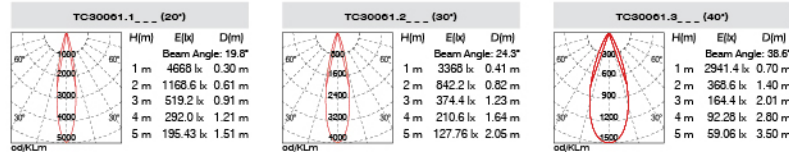


TC30246



Power: 2x12W (500mA/36V)
Lamp: CITIZEN COB (CRI>80)
AC: 200-240V

Beam Angle	Model	Lumen	Finish	LED Colour	LED Driver
20°	TC30246.1_ _ _	1800lm	1 Matt White 2 Matt Black 3 Silver	1 3000K 2 4000K 3 5000K 4 2000K - 2800K Dim to warm 5 2700K	1 On and off 2 Triac dimmable 3 1~10V dimmable 4 Dali 5 Bluetooth
30°	TC30246.2_ _ _	1800lm			
40°	TC30246.3_ _ _	1800lm			

LED Driver
LED Colour
Finish

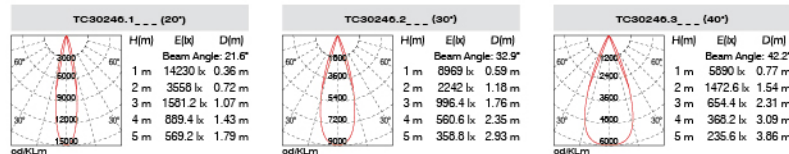



Features

- 1. Surfaced mounted design.
- 2. 0-350°rotating horizontally, 0-90°tilting vertically.
- 3. With the built-in driver design as well as beautiful and decent appearance,can be with superior finish color matt white and matt black.

Application

House, museums and art galleries.



High lumen

90lm/W

50000

50000hrs

More watt (8-32W)

More sizes

IP20

IP Level

350°

350° horizontally

90°

90° vertically

More CCT



DC12073


CE

RoHS

IP20

Grounding symbol


ERP



Power: 8W (150mA/36V)
Lamp: CITIZEN COB (CRI>80)
AC: 200-240V

Beam Angle	Model	Lumen	Finish	LED Colour	LED Driver
20°	DC12073.1_ _ _	600lm	1 Matt White	1 3000K	1 On and off
30°	DC12073.2_ _ _	600lm	2 Matt Black	2 4000K	2 Triac dimmable
40°	DC12073.3_ _ _	600lm	3 Silver	3 5000K	
				4 2000K - 2800K Dim to warm	
				5 2700K	

LED Driver
LED Colour
Finish

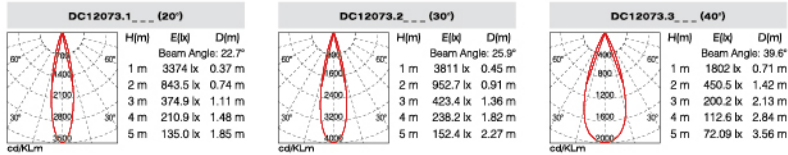

DC12123


CE

RoHS

IP20

Grounding symbol


ERP



Power: 14W (300mA/36V)
Lamp: CITIZEN COB (CRI>80)
AC: 200-240V

Beam Angle	Model	Lumen	Finish	LED Colour	LED Driver
20°	DC12123.1_ _ _	1200lm	1 Matt White	1 3000K	1 On and off
30°	DC12123.2_ _ _	1200lm	2 Matt Black	2 4000K	2 Triac dimmable
40°	DC12123.3_ _ _	1200lm	3 Silver	3 5000K	
				4 2000K - 2800K Dim to warm	
				5 2700K	

LED Driver
LED Colour
Finish

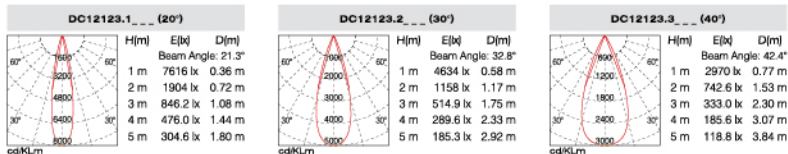

DC12183


CE

RoHS

IP20

Grounding symbol


ERP



Power: 22W (500mA/36V)
Lamp: CITIZEN COB (CRI>80)
AC: 200-240V


Beam Angle	Model	Lumen	Finish	LED Colour	LED Driver
20°	DC12183.1_ _ _	1800lm	1 Matt White	1 3000K	1 On and off
30°	DC12183.2_ _ _	1800lm	2 Matt Black	2 4000K	2 Triac dimmable
40°	DC12183.3_ _ _	1800lm	3 Silver	3 5000K	
				4 2000K - 2800K Dim to warm	
				5 2700K	

LED Driver
LED Colour
Finish

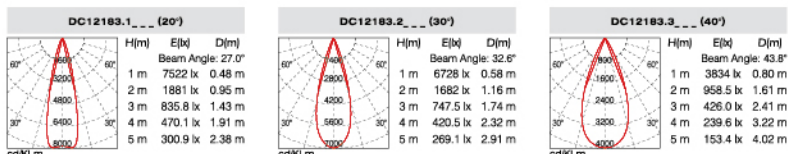






DC12283



Power: 32W (700mA/36V)
Lamp: CITIZEN COB (CRI>80)
AC: 200-240V

Beam Angle	Model	Lumen	Finish	LED Colour	LED Driver
20°	DC12283.1_--	2850lm	1 Matt White	1 3000K	1 On and off
30°	DC12283.2_--	2850lm	2 Matt Black	2 4000K	2 Triac dimmable
40°	DC12283.3_--	2850lm	3 Silver	3 5000K	
				4 2000K - 2800K Dim to warm	
				5 2700K	

LED Driver
LED Colour
Finish



Features

- 1. High efficient, energy saving, eco-friendly downlight, with latest genuine imported COB, perfectly restores the original vivid colour. Improved appearance, creates a comfortable atmosphere. Long lifespan up to 50,000 hours.
- 2. Unique optical design, precise light distribution, high light efficient output, no glare, natural, soft and uniform light, by elevated transparent protective cover;
- 3. Compact, simple and elegant structure, high-quality aluminum alloy die-casting materials and perfect aerodynamic design make the heat dissipation performance of the lamp body more excellent.
- 4. A series of different wattages is optional, to meet the needs of different space illumination.
- 5. A variety of installation options, easy installation.

Application

House, museums and art galleries.



High lumen

90lm/W

50000

50000hrs

More watt (6-40W)

More sizes

IP20

IP Level

350°

350° horizontally



90°

90° vertically

More CCT

0~90° tilting vertically

0~350° rotating horizontally

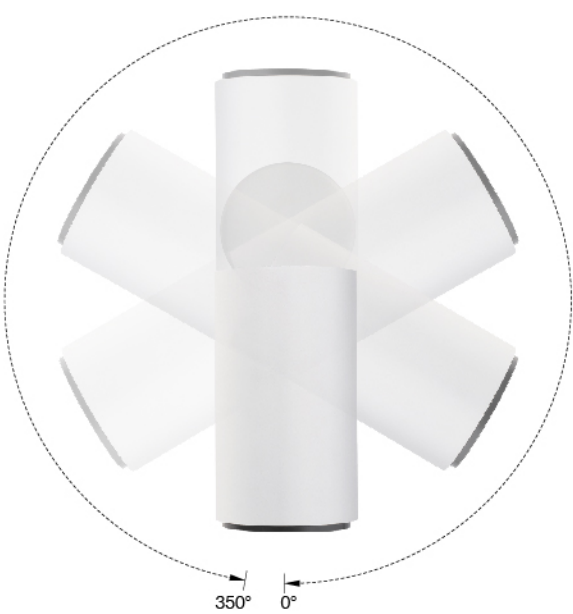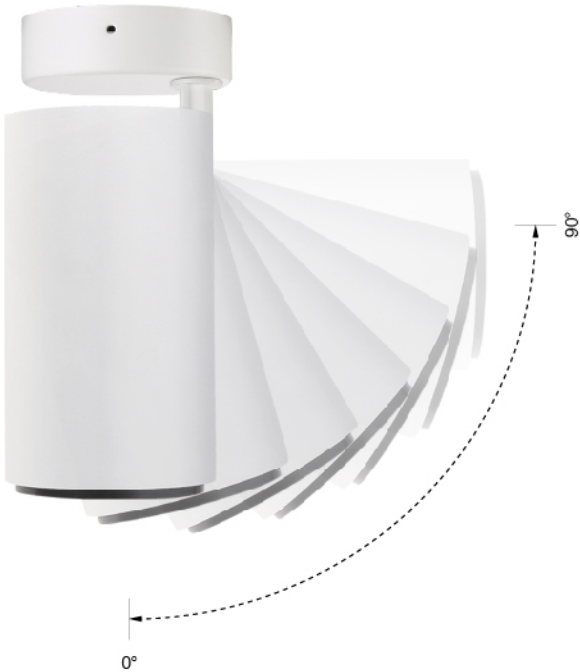

Ziro

CE

RoHS

IP20

LED

ERP

65

35

350°

90°

Ø55

Power: 6W (350mA/15V)

Lamp: EPISTAR COB (CRI>80)


AC: 200-240V

Beam Angle	Model	Lumen	Finish	LED Colour	LED Driver
19°	DG30052.1_---	500lm	1 Matt White	1 3000K	1 On and off
24°	DG30052.2_---	500lm	2 Matt Black	2 4000K	2 Triac dimmable
36°	DG30052.3_---	500lm	3 Silver	3 5000K	
				4 2000K - 2800K Dim to warm	
				5 2700K	

LED Driver

LED Colour

Finish

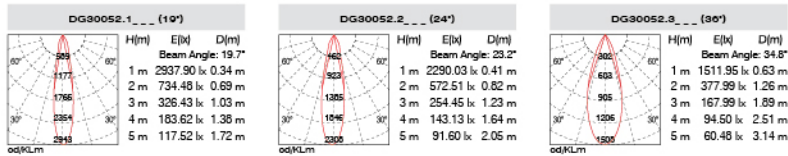

DG30052

CE

RoHS

IP20

LED

ERP

65

35

350°

90°

Ø55

Power: 9W (200mA/36V)

Lamp: EPISTAR COB (CRI>80)


AC: 200-240V

Beam Angle	Model	Lumen	Finish	LED Colour	LED Driver
19°	DG30091.1_---	700lm	1 Matt White	1 3000K	1 On and off
24°	DG30091.2_---	700lm	2 Matt Black	2 4000K	2 Triac dimmable
36°	DG30091.3_---	700lm	3 Silver	3 5000K	
				4 2000K - 2800K Dim to warm	
				5 2700K	

LED Driver

LED Colour


Finish

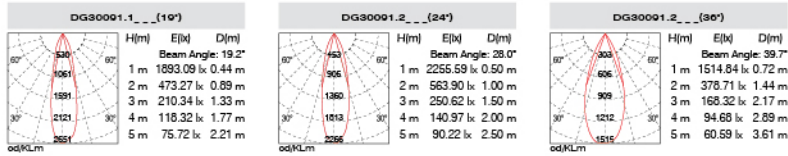

DG30091






DG30131




Power: 13W (300mA/36V)
Lamp: Bridgelux COB (CRI>80)
AC: 200-240V

Beam Angle	Model	Lumen	Finish	LED Colour	LED Driver
19°	DG30131.1_ _ _	1000lm	1 Matt White	1 3000K	1 On and off
24°	DG30131.2_ _ _	1000lm	2 Matt Black	2 4000K	2 Triac dimmable
36°	DG30131.3_ _ _	1000lm	3 Silver	3 5000K	
				4 2000K - 2800K Dim to warm	
				5 2700K	

LED Driver
LED Colour
Finish





DG30155




Power: 15W (350mA/36V)
Lamp: Bridgelux COB (CRI>80)
AC: 200-240V

Beam Angle	Model	Lumen	Finish	LED Colour	LED Driver
24°	DG30155.2_ _ _	1300lm	1 Matt White	1 3000K	1 On and off
36°	DG30155.3_ _ _	1300lm	2 Matt Black	2 4000K	2 Triac dimmable
			3 Silver	3 5000K	
				4 2000K - 2800K Dim to warm	
				5 2700K	

LED Driver
LED Colour
Finish





DG30205




Power: 20W (500mA/36V)
Lamp: Bridgelux COB (CRI>80)
AC: 200-240V

Beam Angle	Model	Lumen	Finish	LED Colour	LED Driver
24°	DG30205.2_ _ _	1900lm	1 Matt White	1 3000K	1 On and off
36°	DG30205.3_ _ _	1900lm	2 Matt Black	2 4000K	2 Triac dimmable
			3 Silver	3 5000K	
				4 2000K - 2800K Dim to warm	
				5 2700K	

LED Driver
LED Colour
Finish






DG30305




Power: 30W (700mA/36V)
Lamp: Bridgelux COB (CRI>80)
AC: 200-240V

Beam Angle	Model	Lumen	Finish	LED Colour	LED Driver
15°	DG30305.1_ _ _	2780lm	1 Matt White	1 3000K	1 On and off
24°	DG30305.2_ _ _	2780lm	2 Matt Black	2 4000K	2 Triac dimmable
36°	DG30305.3_ _ _	2780lm	3 Silver	3 5000K	
				4 2000K - 2800K Dim to warm	
				5 2700K	

LED Driver
LED Colour
Finish






DG30405



Power: 40W (900mA/36V)
Lamp: Bridgelux COB (CRI>80)
AC: 200-240V

Beam Angle	Model	Lumen	Finish	LED Colour	LED Driver
12°	DG30405.1_ _ _	3240lm	1 Matt White	1 3000K	1 On and off
24°	DG30405.2_ _ _	3240lm	2 Matt Black	2 4000K	2 Triac dimmable
36°	DG30405.3_ _ _	3240lm	3 Silver	3 5000K	
				4 2000K - 2800K Dim to warm	
				5 2700K	

LED Driver
LED Colour
Finish



Pendent

Oligo Light

Features

- 1. Surfaced mounted design .
- 2. With the built-in driver design as well as beautiful and decent appearance,can be with superior finish color matt white and matt black.

Application

Shopping mall, hotel, exhibition hall, museum, jewellery shop etc.



High lumen

90lm/W

50000

50000hrs

IP20

IP Level

More CCT



Pendent

Oligo Light



DC12052

CE

IP20


ERP



Power: 5W (350mA/9V)
Lamp: EPISTAR COB (CRI>80)
AC: 200-240V

Beam Angle	Model	Lumen	Finish	LED Colour	LED Driver
18°	DC12052.1_ _ _	380lm	1 Matt White	1 3000K	1 Triac dimmable
24°	DC12052.2_ _ _	380lm	2 Matt Black	2 4000K	
36°	DC12052.3_ _ _	380lm	3 Silver	3 5000K	
				5 2700K	

LED Driver
LED Colour
Finish

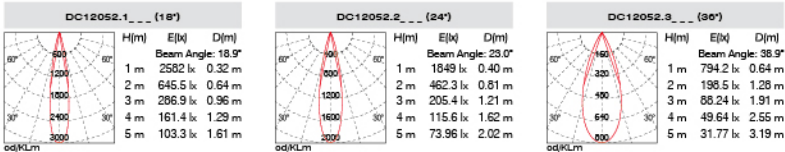


DC12102

CE

IP20


ERP



Power: 14W (350mA/36V)
Lamp: CITIZEN COB (CRI>80)
AC: 200-240V

Beam Angle	Model	Lumen	Finish	LED Colour	LED Driver
20°	DC12102.1_ _ _	1440lm	1 Matt White	1 3000K	1 Triac dimmable
30°	DC12102.2_ _ _	1440lm	2 Matt Black	2 4000K	
40°	DC12102.3_ _ _	1440lm	3 Silver	3 5000K	
				4 2000K - 2800K Dim to warm	
				5 2700K	

LED Driver
LED Colour
Finish

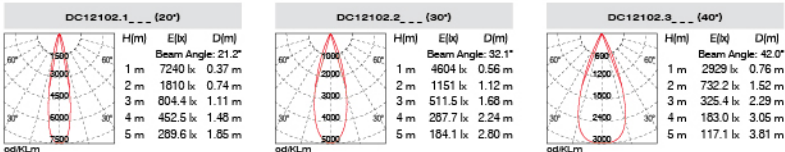

Features

- 1. Imported LED, high CRI, high efficient, high lumen output, energy saving and environmental protection, create a comfortable atmosphere of lighting, long lifespan up to 50,000 hours.
- 2. Unique optical design, produces precise light distribution, high light efficiency output, no glare, natural, soft and uniform light, by elevated transparent protective cover;
- 3. Compact, simple and elegant structure, high-quality aluminum alloy die-casting materials and perfect aerodynamic design make the heat dissipation performance of the lamp body more excellent.
- 4. A variety of wattages optional, meets the lighting requirement of different space;
- 5. A variety of installation options, easy and quick.
- 6. Suitable for house, lounge, also commercial places like museum and gallery.

Application

Houses, museums and art galleries.



High lumen

90lm/W

50000

50000hrs

More watt (9-40W)

More sizes

IP20

IP Level

More CCT





DG30092
9W(700lm)



DG30132
13W(1000lm)



DG30156
15W(1300lm)



DG30206
20W(1900lm)




DG30306
30W(2780lm)




DG30406
40W(3240lm)

Installation Manual


1



2

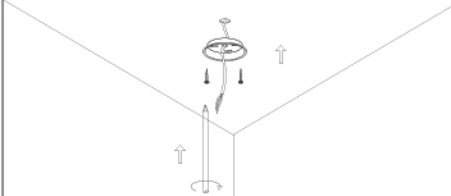


3



4



5




Pendent

Oligo Light




DG30092




Power: 9W (200mA/36V)
Lamp: EPISTAR COB (CRI>80)
AC: 200-240V

Beam Angle	Model	Lumen	Finish	LED Colour	LED Driver
19°	DG30092.1_ _ _	700lm	1 Matt White 2 Matt Black 3 Silver	1 3000K 2 4000K 3 5000K	1 On and off 2 Triac dimmable 3 1~10V dimmable
24°	DG30092.2_ _ _	700lm		4 2000K - 2800K Dim to warm	4 Dali
36°	DG30092.3_ _ _	700lm		5 2700K	5 Bluetooth

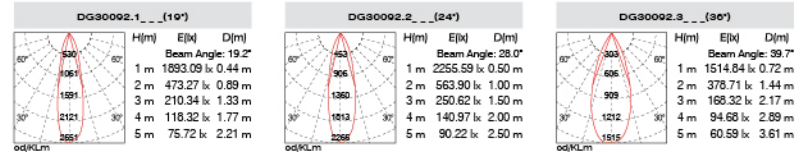


DG30132




Power: 13W (300mA/36V)
Lamp: Bridgelux COB (CRI>80)
AC: 200-240V

Beam Angle	Model	Lumen	Finish	LED Colour	LED Driver
19°	DG30132.1_ _ _	1000lm	1 Matt White 2 Matt Black 3 Silver	1 3000K 2 4000K 3 5000K	1 On and off 2 Triac dimmable 3 1~10V dimmable
24°	DG30132.2_ _ _	1000lm		4 2000K - 2800K Dim to warm	4 Dali
36°	DG30132.3_ _ _	1000lm		5 2700K	5 Bluetooth

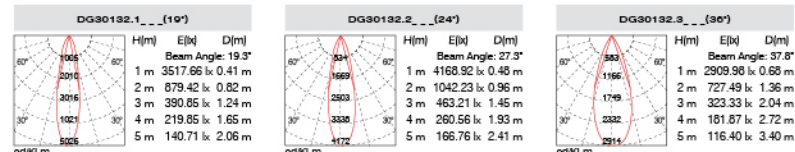


DG30156



Power: 15W (350mA/36V)
Lamp: Bridgelux COB (CRI>80)
AC: 200-240V

Beam Angle	Model	Lumen	Finish	LED Colour	LED Driver
24°	DG30156.2_ _ _	1300lm	1 Matt White 2 Matt Black 3 Silver	1 3000K 2 4000K 3 5000K	1 On and off 2 Triac dimmable
36°	DG30156.3_ _ _	1300lm		4 2000K - 2800K Dim to warm	4 Dali
				5 2700K	5 Bluetooth

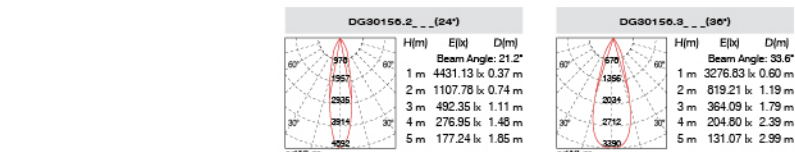


Oligo Light

Pendent




DG30206




Power: 20W (500mA/36V)
Lamp: Bridgelux COB (CRI>80)
AC: 200-240V

Beam Angle	Model	Lumen	Finish	LED Colour	LED Driver
24°	DG30206.2_ _ _	1900lm	1 Matt White 2 Matt Black 3 Silver	1 3000K 2 4000K 3 5000K	1 On and off 2 Triac dimmable
36°	DG30206.3_ _ _	1900lm		4 2000K - 2800K Dim to warm	4 Dali
				5 2700K	5 Bluetooth

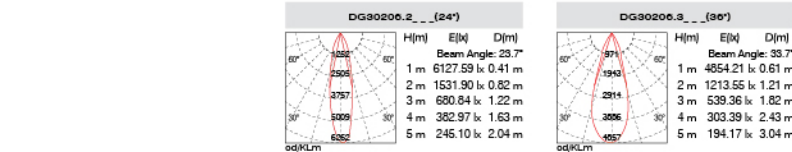


DG30306




Power: 30W (700mA/36V)
Lamp: Bridgelux COB (CRI>80)
AC: 200-240V

Beam Angle	Model	Lumen	Finish	LED Colour	LED Driver
15°	DG30306.1_ _ _	2780lm	1 Matt White 2 Matt Black 3 Silver	1 3000K 2 4000K 3 5000K	1 On and off 2 Triac dimmable 3 1~10V dimmable
24°	DG30306.2_ _ _	2780lm		4 2000K - 2800K Dim to warm	4 Dali
36°	DG30306.3_ _ _	2780lm		5 2700K	5 Bluetooth

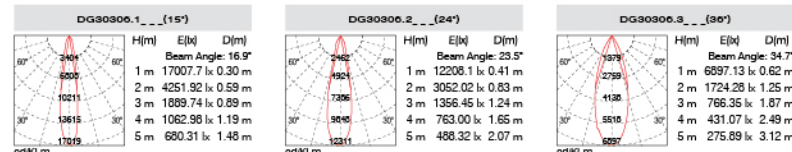


DG30406



Power: 40W (900mA/36V)
Lamp: Bridgelux COB (CRI>80)
AC: 200-240V

Beam Angle	Model	Lumen	Finish	LED Colour	LED Driver
12°	DG30406.1_ _ _	3240lm	1 Matt White 2 Matt Black 3 Silver	1 3000K 2 4000K 3 5000K	1 On and off 2 Triac dimmable 3 1~10V dimmable
24°	DG30406.2_ _ _	3240lm		4 2000K - 2800K Dim to warm	4 Dali
36°	DG30406.3_ _ _	3240lm		5 2700K	5 Bluetooth

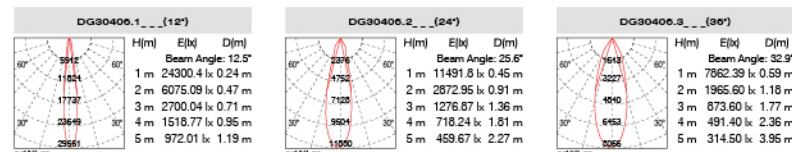


LED DOWNLIGHT

- 130 | LED RECESSED DOWN LIGHT FOR HOTEL
- 176 | LED RECESSED DOWN LIGHT FOR LIVING ROOMS
- 223 | STORE & RESTAURANT LIGHTING
- 246 | SURFACE MOUNTED
- 254 | OFFICE LIGHTING
- 275 | FIRE RATED LIGHTING
- 291 | STAIRS LAMP



Bluetooth Dimming System

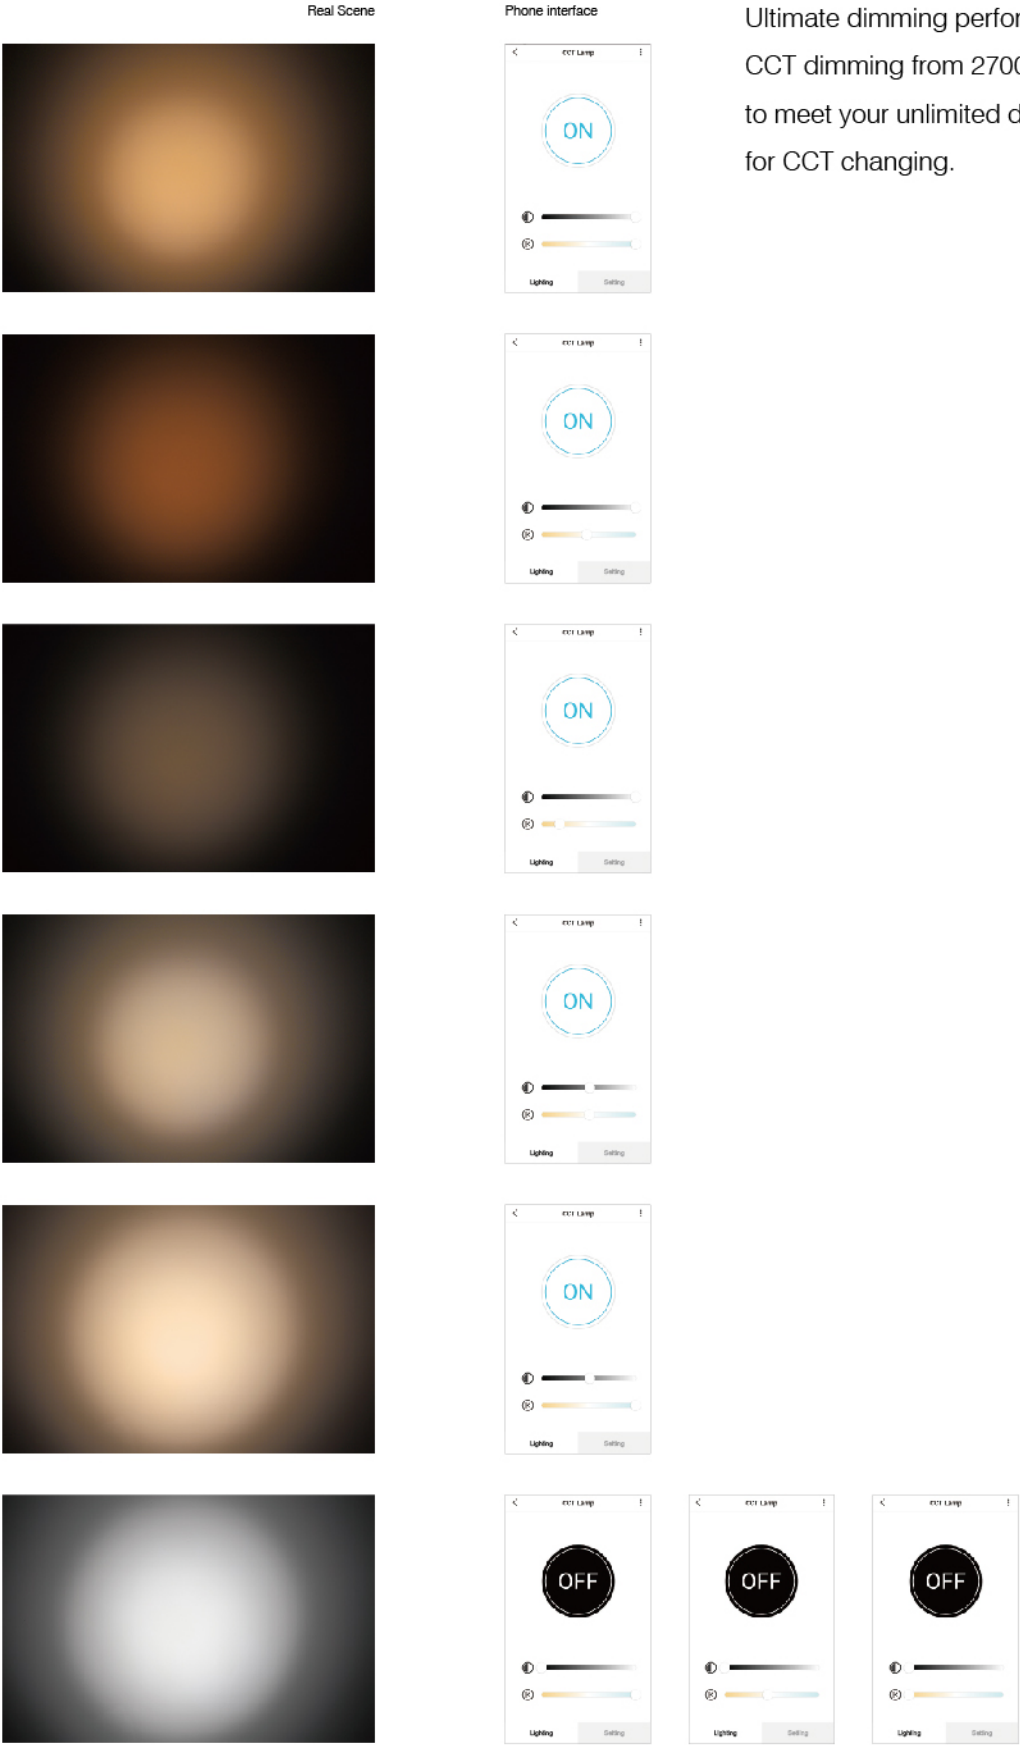


Ultimate dimming performance,
CCT dimming from 2700K~5000K,
to meet your unlimited demands
for CCT changing.

Full Spectrum LED

Colour Rendering and TM-30 Metrics

Nominal CCT	R _r	R _g	R ₁	R ₂	R ₃	R ₄	R ₅	R ₆	R ₇	R ₈	R ₉	R ₁₀	R ₁₁	R ₁₂	R ₁₃	R ₁₄	R ₁₅
2700K	96	102	98	99	95	95	98	99	98	99	95	97	93	95	99	96	100
3000K	96	103	97	99	96	95	97	97	97	98	98	98	93	96	97	96	98
4000K	96	100	97	98	99	98	98	96	97	98	97	96	97	94	97	99	98
5000K	98	100	96	96	98	97	96	95	98	99	94	93	96	93	96	99	96
5700K	96	101	96	96	98	97	96	95	97	98	95	93	97	90	96	99	96
6500K	96	100	97	97	98	96	96	95	96	97	95	94	97	90	97	99	97

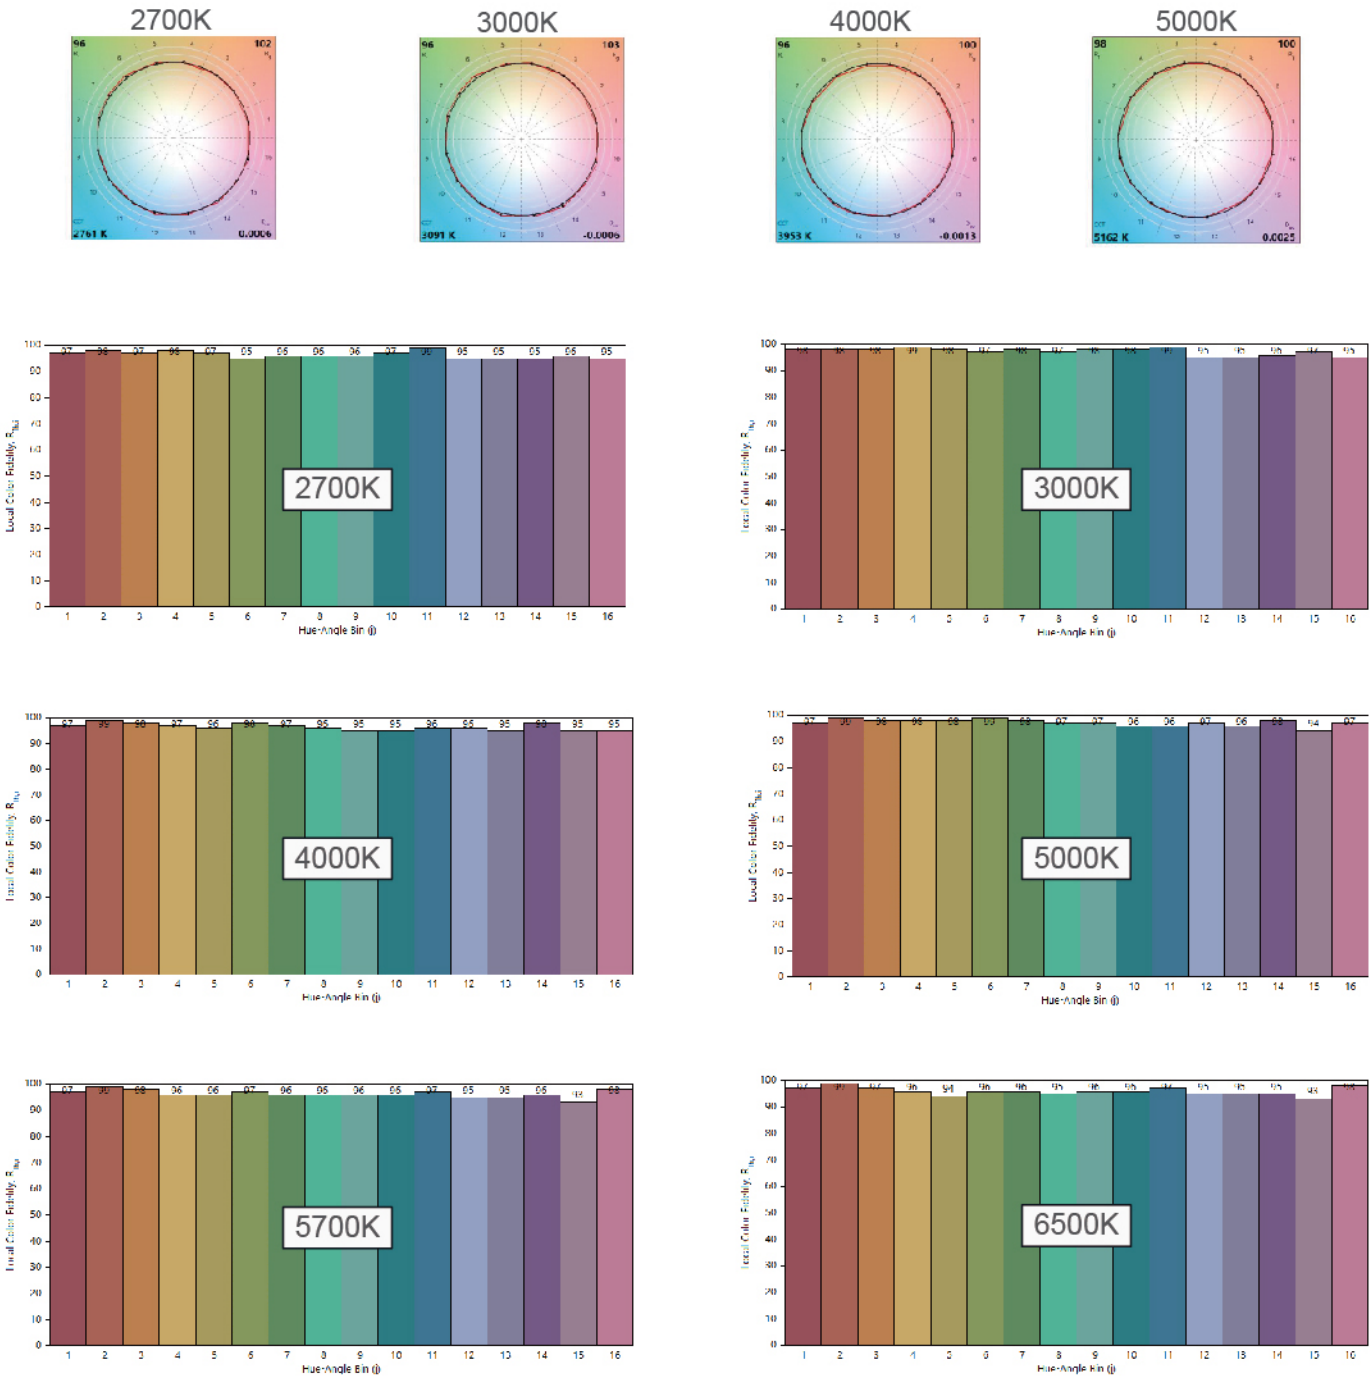

The photos above are for reference only. With a large changing range while dimming, the scenes can not be fully demonstrated here. Any interest or info needed please contact us.

Features

- 1. With COB of high quality, high efficiency and high colour rendering, and lens for various optional angles, the lamp has a long lifespan with highly precise heatsink by die-casting, and flicker-free driver which is compatible of CE, SAA and UKCA.
- 2. By module design, rings, heatsink, reflector and drivers are easy to get assembled and interchangeable.
- 3. Design of sliced and asymmetric outlet, strengthens the convection of air flows.
- 4. Deep anti-glare: UGR<10
- 5. Tilting 30° vertically and rotating 355° horizontally, conveniently focus on different objects.
- 6. Various accessories available: pin hole, oval hole, honey comb, mixing filters, etc.

Application

Shops, hotel, exhibition center, etc.



UGR<10

50000hrs

More watt (8-15W)

More sizes

IP20

Dimmable

More CCT

Rich accessories

Led recessed down light for hotel



TC58073

CE

SAA

RoHS

IP20


ERP



Power: 6W (350mA/15V)
Lamp: EPISTAR COB (CRI>80)
AC: 200-240V

Beam Angle	Model	Lumen	Finish	LED Colour	LED Driver
24°	TC58073.1	360lm	1 Matt White	1 3000K	1 On and off
36°	TC58073.2	470lm	2 Matt Black	2 4000K	2 Triac dimmable
55°	TC58073.3	490lm	3 Silver	3 5000K	3 1~10V dimmable
				5 2700K	

LED Driver
LED Colour
Finish

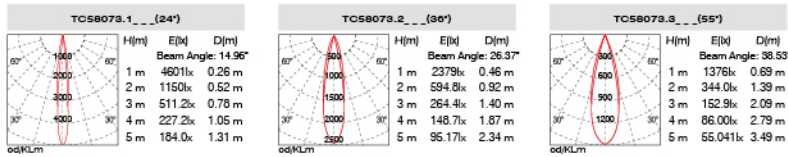

TC58103


CE

SAA

RoHS

IP20


ERP



Power: 12W (260mA/36V)
Lamp: EPISTAR COB (CRI>80)
AC: 200-240V

Beam Angle	Model	Lumen	Finish	LED Colour	LED Driver
18°	TC58103.1	720lm	1 Matt White	1 3000K	1 On and off
24°	TC58103.2	800lm	2 Matt Black	2 4000K	2 Triac dimmable
36°	TC58103.3	880lm	3 Silver	3 5000K	3 1~10V dimmable
55°	TC58103.4	910lm		5 2700K	4 Dali 5 Bluetooth

LED Driver
LED Colour
Finish

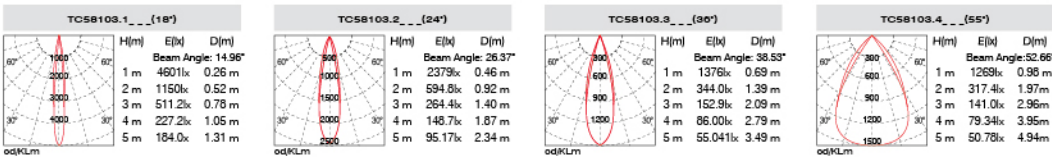

TC58153

CE

SAA

RoHS

IP20


ERP



Power: 15W (350mA/36V)
Lamp: EPISTAR COB (CRI>90)
AC: 200-240V


Beam Angle	Model	Lumen	Finish	LED Colour	LED Driver
15°	TC58153.1	910lm	1 Matt White	1 3000K	1 On and off
24°	TC58153.2	1100lm	2 Matt Black	2 4000K	2 Triac dimmable
36°	TC58153.3	1400lm	3 Silver	3 5000K	3 1~10V dimmable
				5 2700K	4 Dali 5 Bluetooth

LED Driver
LED Colour
Finish

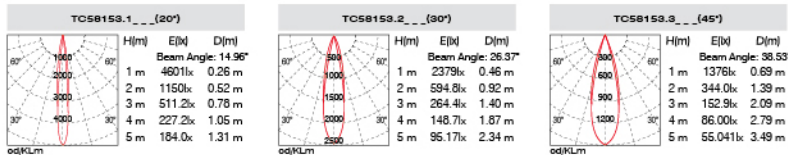




TC58074

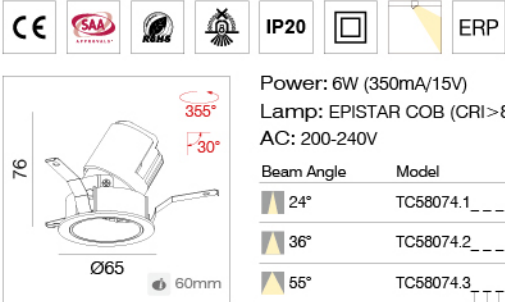


Power: 6W (350mA/15V)
Lamp: EPISTAR COB (CRI>80)
AC: 200-240V

Beam Angle	Model	Lumen	Finish	LED Colour	LED Driver
24°	TC58074.1	360lm	1 Matt White	1 3000K	1 On and off
36°	TC58074.2	470lm	2 Matt Black	2 4000K	2 Triac dimmable
55°	TC58074.3	490lm	3 Silver	3 5000K	3 1~10V dimmable
				5 2700K	

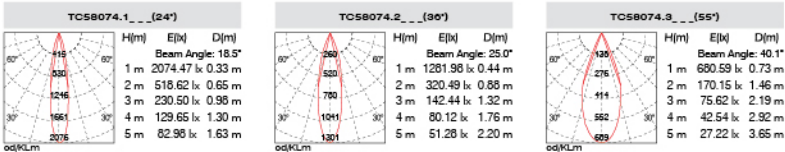


TC58104

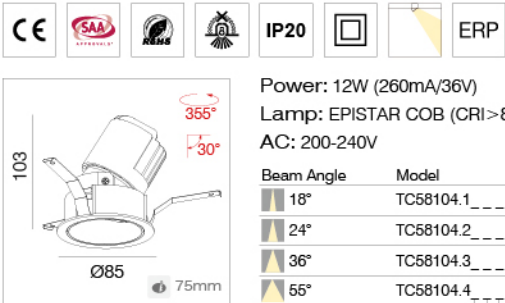


Power: 12W (260mA/36V)
Lamp: EPISTAR COB (CRI>80)
AC: 200-240V

Beam Angle	Model	Lumen	Finish	LED Colour	LED Driver
18°	TC58104.1	720lm	1 Matt White	1 3000K	1 On and off
24°	TC58104.2	800lm	2 Matt Black	2 4000K	2 Triac dimmable
36°	TC58104.3	880lm	3 Silver	3 5000K	3 1~10V dimmable
55°	TC58104.4	910lm		5 2700K	4 Dali
					5 Bluetooth

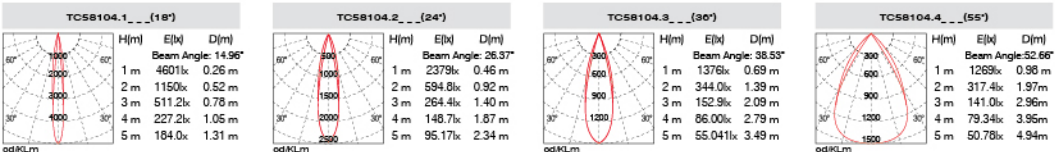


TC58154

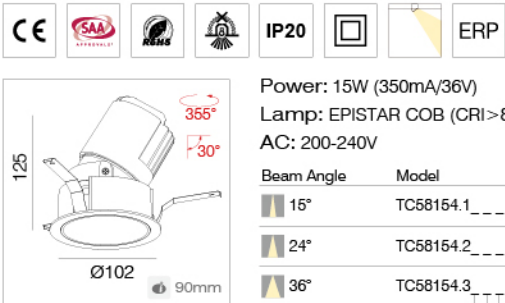


Power: 15W (350mA/36V)
Lamp: EPISTAR COB (CRI>80)
AC: 200-240V

Beam Angle	Model	Lumen	Finish	LED Colour	LED Driver
15°	TC58154.1	910lm	1 Matt White	1 3000K	1 On and off
24°	TC58154.2	1100lm	2 Matt Black	2 4000K	2 Triac dimmable
36°	TC58154.3	1400lm	3 Silver	3 5000K	3 1~10V dimmable
				5 2700K	4 Dali
					5 Bluetooth

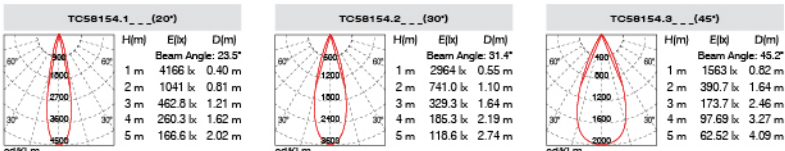


TC58077

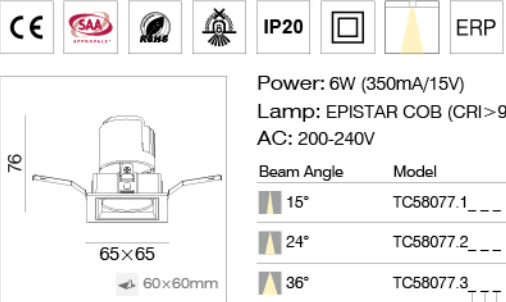


Power: 6W (350mA/15V)
Lamp: EPISTAR COB (CRI>90)
AC: 200-240V

Beam Angle	Model	Lumen	Finish	LED Colour	LED Driver
15°	TC58077.1	360lm	1 Matt White	1 3000K	1 On and off
24°	TC58077.2	470lm	2 Matt Black	2 4000K	2 Triac dimmable
36°	TC58077.3	490lm	3 Silver	3 5000K	3 1~10V dimmable
				5 2700K	

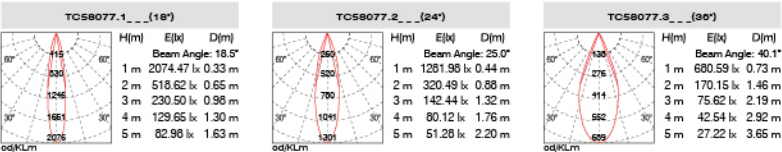


TC58107

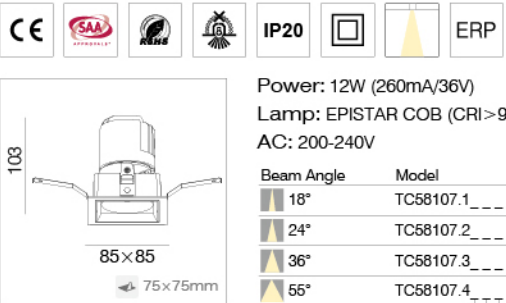


Power: 12W (260mA/36V)
Lamp: EPISTAR COB (CRI>90)
AC: 200-240V

Beam Angle	Model	Lumen	Finish	LED Colour	LED Driver
18°	TC58107.1	720lm	1 Matt White	1 3000K	1 On and off
24°	TC58107.2	800lm	2 Matt Black	2 4000K	2 Triac dimmable
36°	TC58107.3	880lm	3 Silver	3 5000K	3 1~10V dimmable
55°	TC58107.4	910lm		5 2700K	4 Dali
					5 Bluetooth

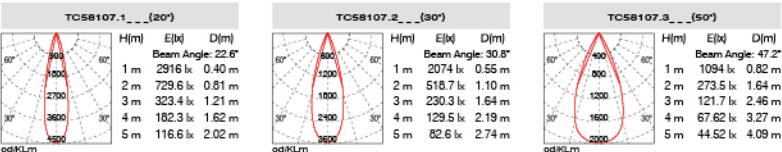


TC58157

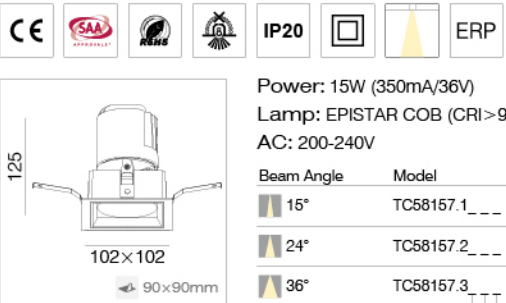


Power: 15W (350mA/36V)
Lamp: EPISTAR COB (CRI>90)
AC: 200-240V

Beam Angle	Model	Lumen	Finish	LED Colour	LED Driver
15°	TC58157.1	910lm	1 Matt White	1 2700K	1 On and off
24°	TC58157.2	1100lm	2 Matt Black	2 3000K	2 Triac dimmable
36°	TC58157.3	1400lm	3 Silver	3 4000K	3 1~10V dimmable
				4 5000K	4 Dali
					5 Bluetooth

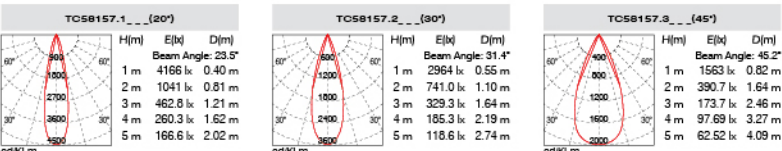




TC58075

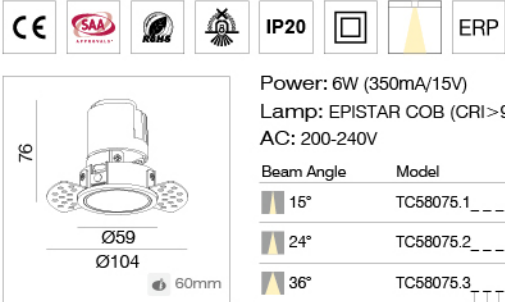


Power: 6W (350mA/15V)
Lamp: EPISTAR COB (CRI>90)
AC: 200-240V

Beam Angle	Model	Lumen	Finish	LED Colour	LED Driver
15°	TC58075.1	360lm	1 Matt White	1 2700K	1 On and off
24°	TC58075.2	470lm	2 Matt Black	2 3000K	2 Triac dimmable
36°	TC58075.3	490lm	3 Silver	3 4000K	3 1~10V dimmable
				4 5000K	

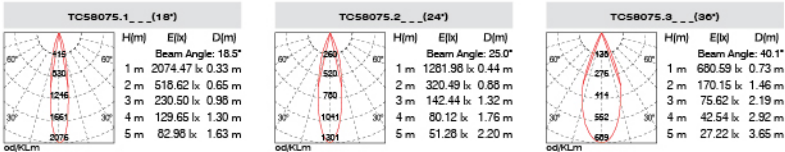


TC58105

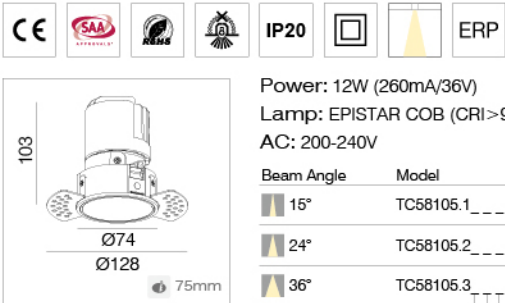


Power: 12W (260mA/36V)
Lamp: EPISTAR COB (CRI>90)
AC: 200-240V

Beam Angle	Model	Lumen	Finish	LED Colour	LED Driver
15°	TC58105.1	720lm	1 Matt White	1 2700K	1 On and off
24°	TC58105.2	800lm	2 Matt Black	2 3000K	2 Triac dimmable
36°	TC58105.3	880lm	3 Silver	3 4000K	3 1~10V dimmable
				4 5000K	4 Dali
					5 Bluetooth

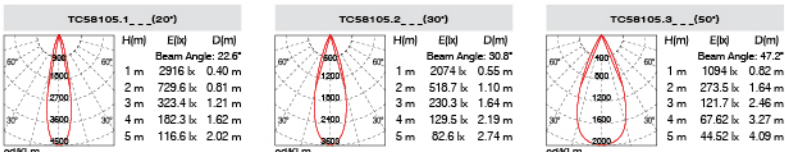


TC58155

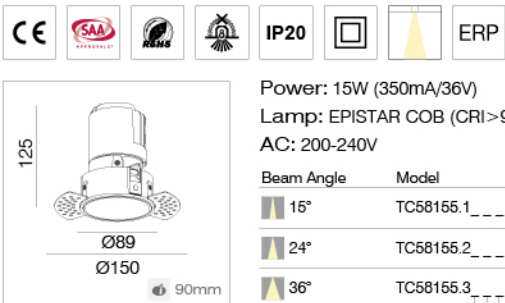


Power: 15W (350mA/36V)
Lamp: EPISTAR COB (CRI>90)
AC: 200-240V

Beam Angle	Model	Lumen	Finish	LED Colour	LED Driver
15°	TC58155.1	910lm	1 Matt White	1 2700K	1 On and off
24°	TC58155.2	1100lm	2 Matt Black	2 3000K	2 Triac dimmable
36°	TC58155.3	1400lm	3 Silver	3 4000K	3 1~10V dimmable
				4 5000K	4 Dali
					5 Bluetooth

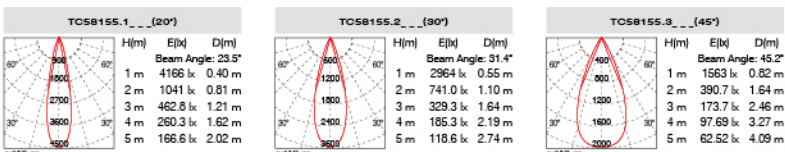


TC58076

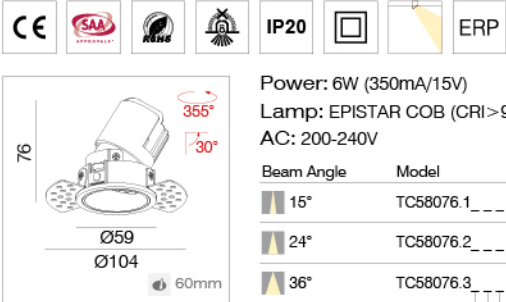


Power: 6W (350mA/15V)
Lamp: EPISTAR COB (CRI>90)
AC: 200-240V

Beam Angle	Model	Lumen	Finish	LED Colour	LED Driver
15°	TC58076.1	360lm	1 Matt White	1 3000K	1 On and off
24°	TC58076.2	470lm	2 Matt Black	2 4000K	2 Triac dimmable
36°	TC58076.3	490lm	3 Silver	3 5000K	3 1~10V dimmable
				4 2700K	

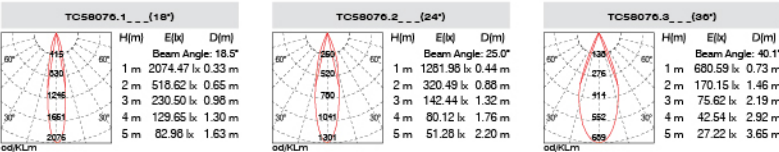


TC58106

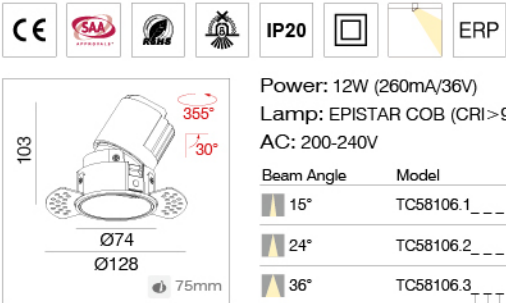


Power: 12W (260mA/36V)
Lamp: EPISTAR COB (CRI>90)
AC: 200-240V

Beam Angle	Model	Lumen	Finish	LED Colour	LED Driver
15°	TC58106.1	720lm	1 Matt White	1 3000K	1 On and off
24°	TC58106.2	800lm	2 Matt Black	2 4000K	2 Triac dimmable
36°	TC58106.3	880lm	3 Silver	3 5000K	3 1~10V dimmable
				4 2000K - 2800K	4 Dali
				5 2700K	5 Bluetooth

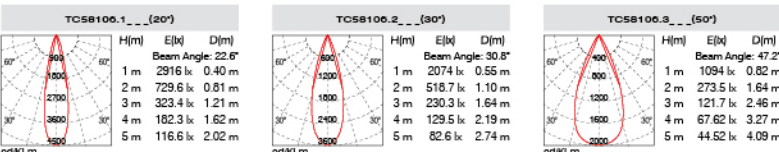


TC58156

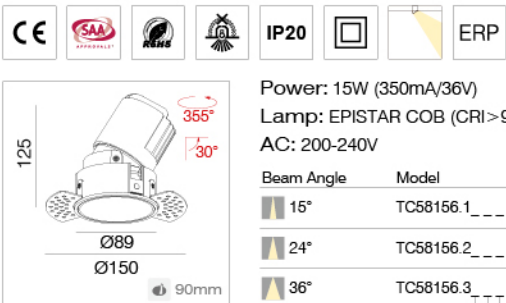

Power: 15W (350mA/36V)
Lamp: EPISTAR COB (CRI>90)
AC: 200-240V

Beam Angle	Model	Lumen	Finish	LED Colour	LED Driver
15°	TC58156.1	910lm	1 Matt White	1 2700K	1 On and off
24°	TC58156.2	1100lm	2 Matt Black	2 3000K	2 Triac dimmable
36°	TC58156.3	1400lm	3 Silver	3 4000K	3 1~10V dimmable
				4 5000K	4 Dali
					5 Bluetooth

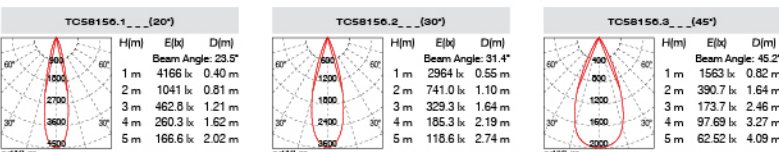


Tank

NEW Led recessed down light for hotel




TC58078

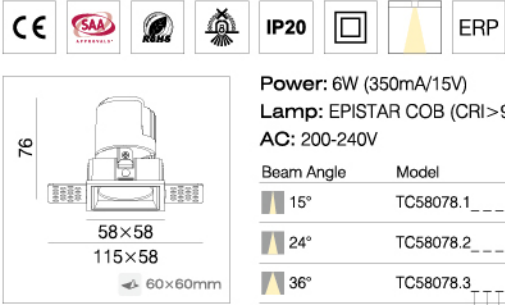


Power: 6W (350mA/15V)
Lamp: EPISTAR COB (CRI>90)
AC: 200-240V

Beam Angle	Model	Lumen	Finish	LED Colour	LED Driver
15°	TC58078.1	360lm	1 Matt White 2 Matt Black 3 Silver	1 2700K 2 3000K 3 4000K 4 5000K	1 On and off 2 Triac dimmable 3 1~10V dimmable
24°	TC58078.2	470lm			
36°	TC58078.3	490lm			

LED Driver
LED Colour
Finish

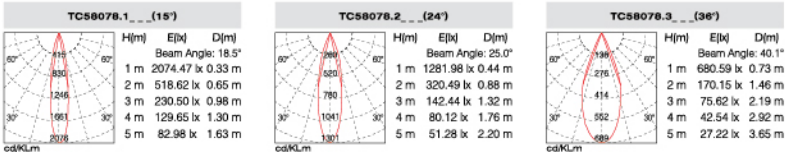


TC58108

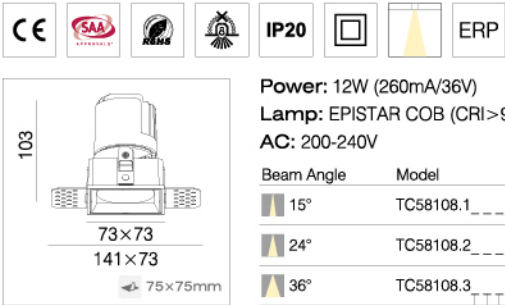


Power: 12W (260mA/36V)
Lamp: EPISTAR COB (CRI>90)
AC: 200-240V

Beam Angle	Model	Lumen	Finish	LED Colour	LED Driver
15°	TC58108.1	720lm	1 Matt White 2 Matt Black 3 Silver	1 2700K 2 3000K 3 4000K 4 5000K	1 On and off 2 Triac dimmable 3 1~10V dimmable 4 Dali 5 Bluetooth
24°	TC58108.2	800lm			
36°	TC58108.3	880lm			

LED Driver
LED Colour
Finish

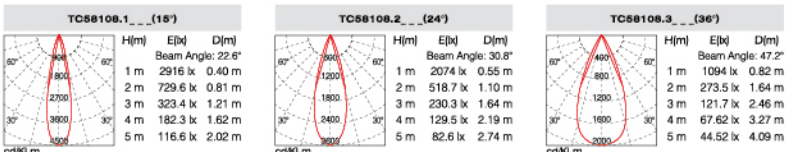


TC58158

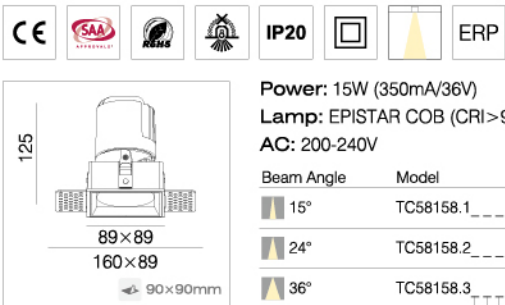

Power: 15W (350mA/36V)
Lamp: EPISTAR COB (CRI>90)
AC: 200-240V

Beam Angle	Model	Lumen	Finish	LED Colour	LED Driver
15°	TC58158.1	910lm	1 Matt White 2 Matt Black 3 Silver	1 2700K 2 3000K 3 4000K 4 5000K	1 On and off 2 Triac dimmable 3 1~10V dimmable 4 Dali 5 Bluetooth
24°	TC58158.2	1100lm			
36°	TC58158.3	1400lm			

LED Driver
LED Colour
Finish

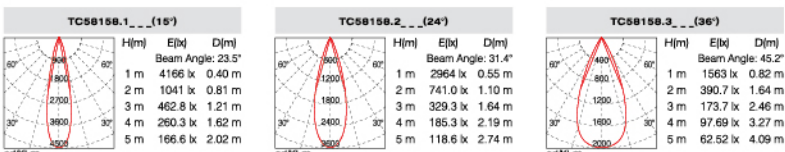

Features

- 1. Imported COB LED, branded driver, imported IC make sure lamps high efficient/long lifespan/ energy saving.
- 2. High quality aluminum alloy die-casting heat sink, graceful and high-end, perfect heat dissipation function make sure long lifespan.
- 3. Springs at both sides are for easy installation.
- 4. UGR<12, low glaring, soft and tender light.
- 5. Various power options for different requirements.
- 6. Anti-glare rings at front, in colours of matt black, matt silver, glossy gold, glossy silver, etc, is for different visual effects.
- 7. Small pin hole and oval hole can match different light spot requirements
- 8. Honeycomb and woven glass as optional accessories.

Application

Shops, hotel, exhibition center, etc.




TC53052



Power: 6W (500mA/10V)
Lamp: CITIZEN COB (CRI>80)
AC: 200-240V

Beam Angle	Model	Lumen	Finish	LED Colour	LED Driver
18°	TC53052.1_ _ _	310lm	1 Matt White	1 3000K	1 On and off
24°	TC53052.2_ _ _	310lm	2 Matt Black	2 4000K	2 Triac dimmable
36°	TC53052.3_ _ _	310lm	3 Silver	3 5000K	3 1~10V dimmable
				5 2700K	

LED Driver
LED Colour
Finish

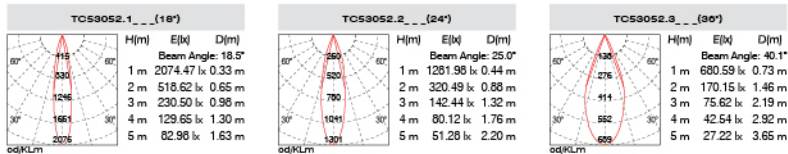


TC53073



Power: 9W (200mA/36V)
Lamp: EPISTAR COB (CRI>80)
AC: 200-240V

Beam Angle	Model	Lumen	Finish	LED Colour	LED Driver
20°	TC53073.1_ _ _	670lm	1 Matt White	1 3000K	1 On and off
30°	TC53073.2_ _ _	670lm	2 Matt Black	2 4000K	2 Triac dimmable
50°	TC53073.3_ _ _	670lm	3 Silver	3 5000K	3 1~10V dimmable
				4 2000K - 2800K Dim to warm	4 Dali
				5 2700K	5 Bluetooth

LED Driver
LED Colour
Finish

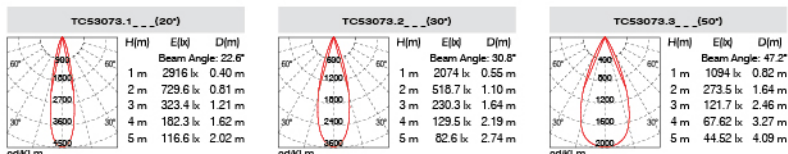


TC53103



Power: 12W (260mA/36V)
Lamp: Bridgelux COB (CRI>80)
AC: 200-240V

Beam Angle	Model	Lumen	Finish	LED Colour	LED Driver
20°	TC53103.1_ _ _	950lm	1 Matt White	1 3000K	1 On and off
30°	TC53103.2_ _ _	950lm	2 Matt Black	2 4000K	2 Triac dimmable
45°	TC53103.3_ _ _	950lm	3 Silver	3 5000K	3 1~10V dimmable
				4 2000K - 2800K Dim to warm	4 Dali
				5 2700K	5 Bluetooth

LED Driver
LED Colour
Finish

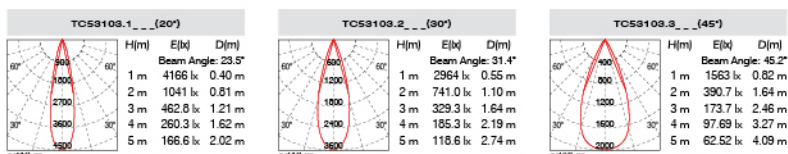


Features

- 1. Imported COB LED, branded driver, imported IC ensure lamps high efficient/long lifespan/ energy saving.
- 2. High quality aluminum alloy die-casting heat sink, graceful and high-end, perfect heat dissipation function make sure long lifespan.
- 3. Advanced power coating technology, finish can be customized.
- 4. Reflector at front, easy to maintain and clean.
- 5. The reflector is made of imported PC materials, precise injection molding, vacuum plating, high light reflection ratio.
- 6. Springs at both sides are for easy installation.
- 7. Fixed, tiltable, wall washer, trimless as options, power from 15W to 30W, match with different installing and lumen requirement.
- 8. UGR<12, low glaring, soft and tender light.

Application

Shops, hotel, exhibition center, etc..

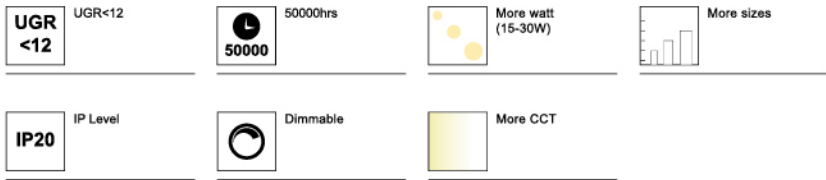

Fix with trim



Fix and trimless



Tiltable with trim




Tiltable and trimless




Anti-glare

Normally the visual range of human's eyes is between 30° above horizontal and 60° below. Any dazzling light between this extent is called glaring. The angle of light emitted by Diaman's lamps, is regulated within 30°, thus the glaring hazard is well under control.

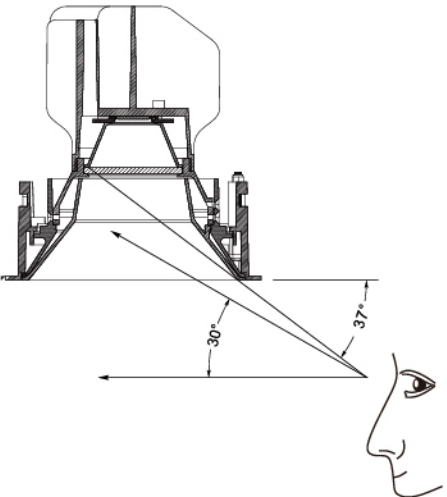




TC54153

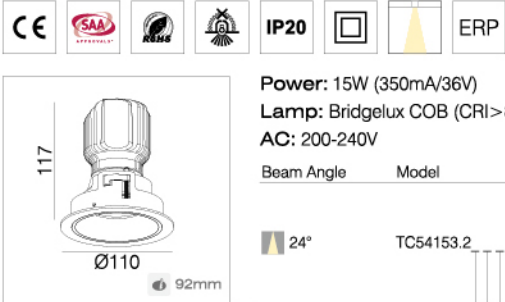


Power: 15W (350mA/36V)
Lamp: Bridgelux COB (CRI>80)
AC: 200-240V

Beam Angle	Model	Lumen	Finish	LED Colour	LED Driver
24°	TC54153.2	900lm	1 Matt White 2 Matt Black 3 Silver	1 3000K 2 4000K 3 5000K 5 2700K	1 On and off 2 Triac dimmable 3 1~10V dimmable 4 Dali 5 Bluetooth

LED Driver
LED Colour
Finish




TC54203

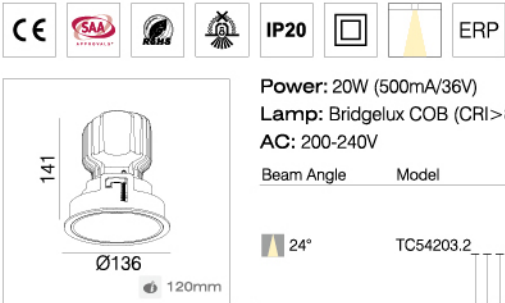


Power: 20W (500mA/36V)
Lamp: Bridgelux COB (CRI>80)
AC: 200-240V

Beam Angle	Model	Lumen	Finish	LED Colour	LED Driver
24°	TC54203.2	1400lm	1 Matt White 2 Matt Black 3 Silver	1 3000K 2 4000K 3 5000K 5 2700K	1 On and off 2 Triac dimmable 3 1~10V dimmable 4 Dali 5 Bluetooth

LED Driver
LED Colour
Finish




TC54303

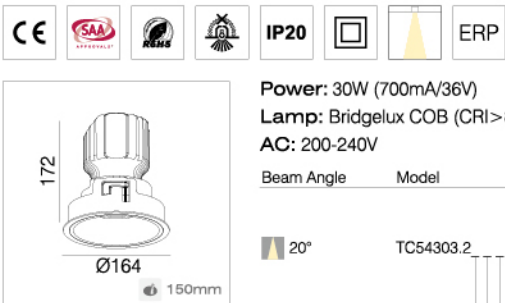


Power: 30W (700mA/36V)
Lamp: Bridgelux COB (CRI>80)
AC: 200-240V

Beam Angle	Model	Lumen	Finish	LED Colour	LED Driver
20°	TC54303.2	2100lm	1 Matt White 2 Matt Black 3 Silver	1 3000K 2 4000K 3 5000K 5 2700K	1 On and off 2 Triac dimmable 3 1~10V dimmable 4 Dali 5 Bluetooth

LED Driver
LED Colour
Finish




TC54155

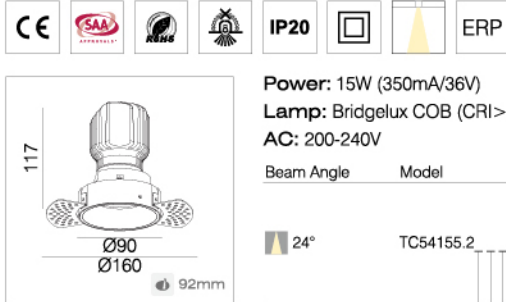


Power: 15W (350mA/36V)
Lamp: Bridgelux COB (CRI>80)
AC: 200-240V

Beam Angle	Model	Lumen	Finish	LED Colour	LED Driver
24°	TC54155.2	900lm	1 Matt White 2 Matt Black 3 Silver	1 3000K 2 4000K 3 5000K 5 2700K	1 On and off 2 Triac dimmable 3 1~10V dimmable 4 Dali 5 Bluetooth

LED Driver
LED Colour
Finish




TC54205

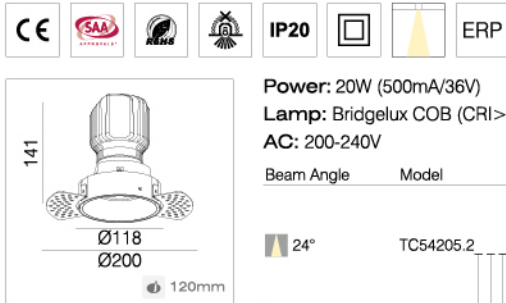


Power: 20W (500mA/36V)
Lamp: Bridgelux COB (CRI>80)
AC: 200-240V

Beam Angle	Model	Lumen	Finish	LED Colour	LED Driver
24°	TC54205.2	1400lm	1 Matt White 2 Matt Black 3 Silver	1 3000K 2 4000K 3 5000K 5 2700K	1 On and off 2 Triac dimmable 3 1~10V dimmable 4 Dali 5 Bluetooth

LED Driver
LED Colour
Finish




TC54305

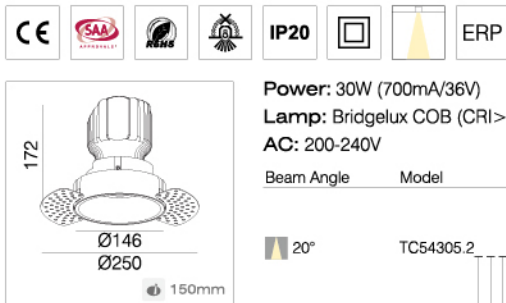

Power: 30W (700mA/36V)
Lamp: Bridgelux COB (CRI>80)
AC: 200-240V


Beam Angle	Model	Lumen	Finish	LED Colour	LED Driver
20°	TC54305.2	2100lm	1 Matt White 2 Matt Black 3 Silver	1 3000K 2 4000K 3 5000K 5 2700K	1 On and off 2 Triac dimmable 3 1~10V dimmable 4 Dali 5 Bluetooth

LED Driver
LED Colour
Finish






TC54154

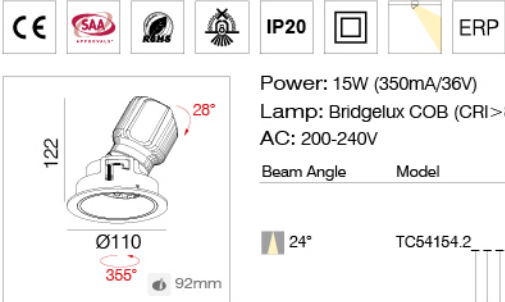


Power: 15W (350mA/36V)
Lamp: Bridgelux COB (CRI>80)
AC: 200-240V

Beam Angle	Model	Lumen	Finish	LED Colour	LED Driver
24°	TC54154.2	900lm	1 Matt White 2 Matt Black 3 Silver	1 3000K 2 4000K 3 5000K 5 2700K	1 On and off 2 Triac dimmable 3 1~10V dimmable 4 Dali 5 Bluetooth

LED Driver
LED Colour
Finish




TC54204

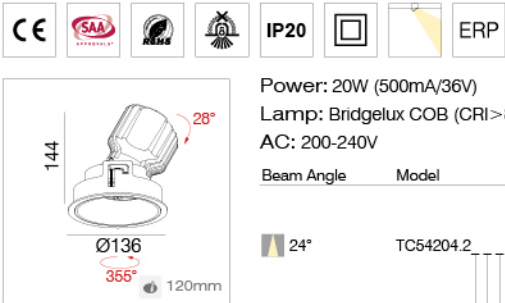


Power: 20W (500mA/36V)
Lamp: Bridgelux COB (CRI>80)
AC: 200-240V

Beam Angle	Model	Lumen	Finish	LED Colour	LED Driver
24°	TC54204.2	1400lm	1 Matt White 2 Matt Black 3 Silver	1 3000K 2 4000K 3 5000K 5 2700K	1 On and off 2 Triac dimmable 3 1~10V dimmable 4 Dali 5 Bluetooth

LED Driver
LED Colour
Finish




TC54304

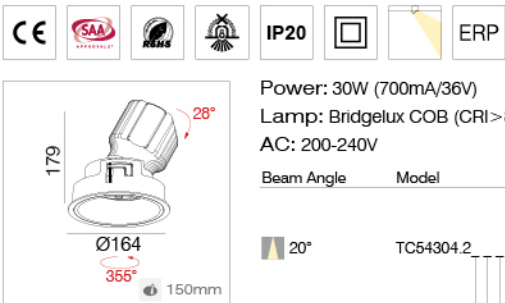


Power: 30W (700mA/36V)
Lamp: Bridgelux COB (CRI>80)
AC: 200-240V

Beam Angle	Model	Lumen	Finish	LED Colour	LED Driver
20°	TC54304.2	2100lm	1 Matt White 2 Matt Black 3 Silver	1 3000K 2 4000K 3 5000K 5 2700K	1 On and off 2 Triac dimmable 3 1~10V dimmable 4 Dali 5 Bluetooth

LED Driver
LED Colour
Finish




TC54156

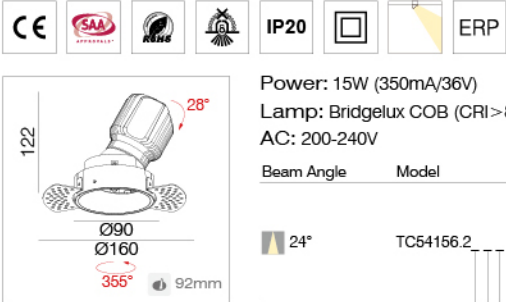


Power: 15W (350mA/36V)
Lamp: Bridgelux COB (CRI>80)
AC: 200-240V

Beam Angle	Model	Lumen	Finish	LED Colour	LED Driver
24°	TC54156.2	900lm	1 Matt White 2 Matt Black 3 Silver	1 3000K 2 4000K 3 5000K 5 2700K	1 On and off 2 Triac dimmable 3 1~10V dimmable 4 Dali 5 Bluetooth

LED Driver
LED Colour
Finish




TC54206

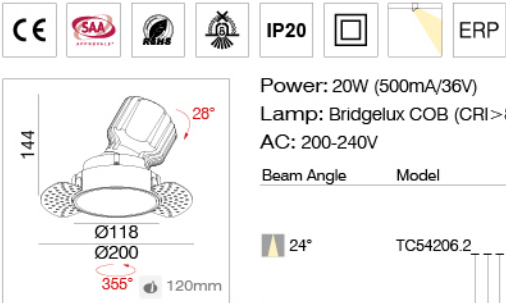


Power: 20W (500mA/36V)
Lamp: Bridgelux COB (CRI>80)
AC: 200-240V

Beam Angle	Model	Lumen	Finish	LED Colour	LED Driver
24°	TC54206.2	1400lm	1 Matt White 2 Matt Black 3 Silver	1 3000K 2 4000K 3 5000K 5 2700K	1 On and off 2 Triac dimmable 3 1~10V dimmable 4 Dali 5 Bluetooth

LED Driver
LED Colour
Finish




TC54306

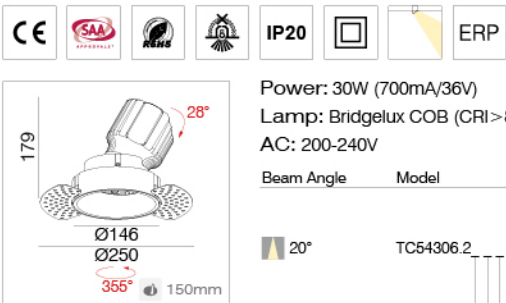

Power: 30W (700mA/36V)
Lamp: Bridgelux COB (CRI>80)
AC: 200-240V

Beam Angle	Model	Lumen	Finish	LED Colour	LED Driver
20°	TC54306.2	2100lm	1 Matt White 2 Matt Black 3 Silver	1 3000K 2 4000K 3 5000K 5 2700K	1 On and off 2 Triac dimmable 3 1~10V dimmable 4 Dali 5 Bluetooth

LED Driver
LED Colour
Finish





Features

- 1. High efficient, energy saving, eco-friendly downlight, with latest genuine imported COB, perfectly restores the original vivid colour. Improved appearance, creates a comfortable atmosphere. Long lifespan up to 50,000 hours.
- 2. Specially designed optical system, with high light transmittance protective diffuser, produces precise, highly efficient, natural and soft light output.
- 3. With simple and compact structure, in aerodynamics design, the heat sink made from good aluminum alloy, creates better thermal performance.
- 4. Different wattage available, for various space needs.

Application

Places like museum and gallery.


Fixed



High lumen	90lm/W	50000	50000hrs	More watt (7-40W)	More sizes
IP20 IP44	IP Level	UGR <19	UGR<19	Dimmable	More CCT



 TC68051 7W(550lm) 68-70mm	 TC68101 12W(790lm) 80-83mm	 TC68151 16W(1290lm) 88-90mm
 DC21202 20W(2100lm) 105mm	 DC21302 30W(2600lm) 125mm	 DC21402 40W(3500lm) 155mm
 TC68054 7W(550lm) 70x70mm	 TC68104 12W(790lm) 83x83mm	 TC68154 16W(1290lm) 90x90mm

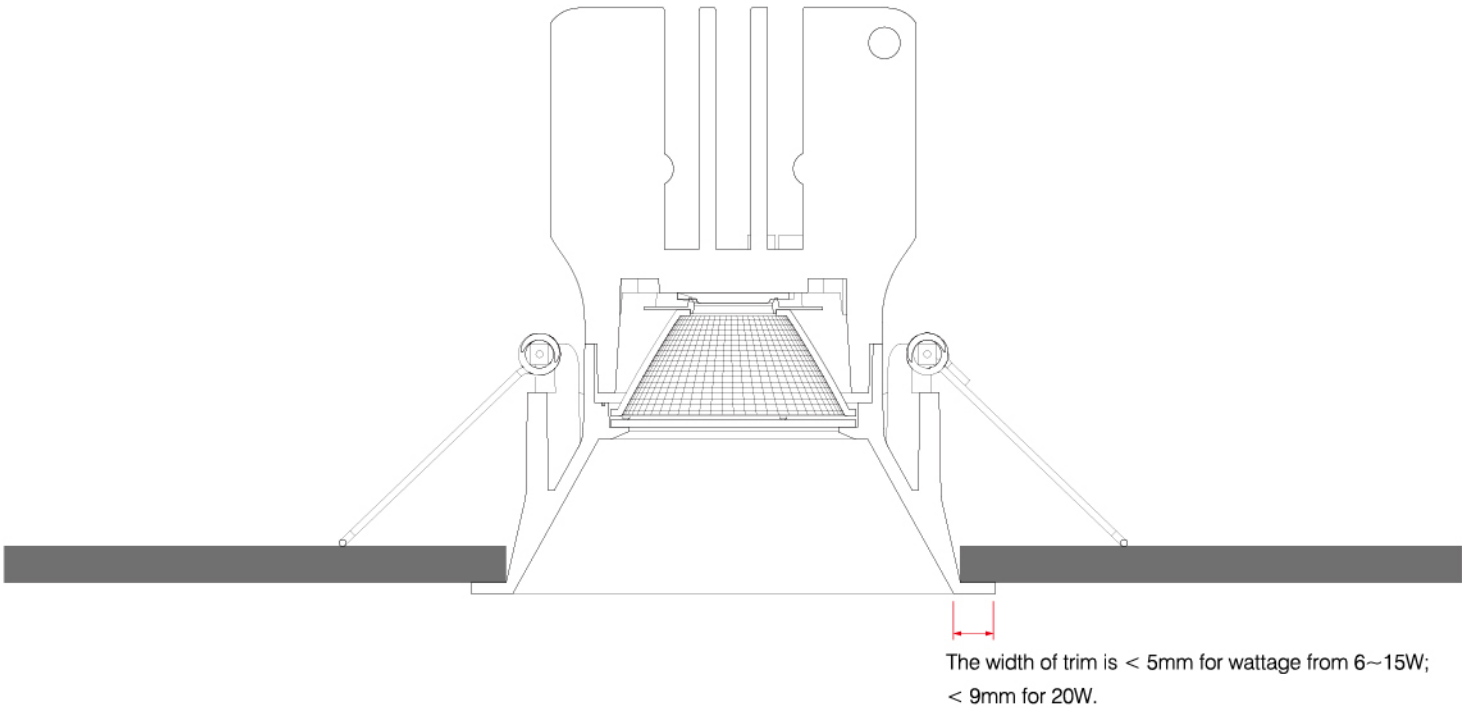


Huzzi Fixed

Led recessed down light for hotel




TC68051

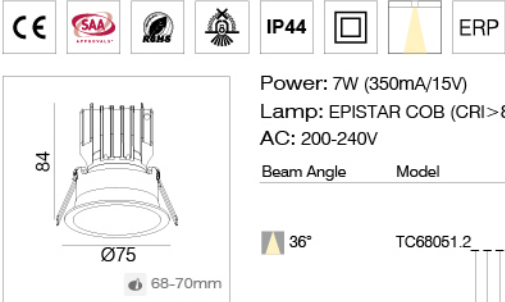

Power: 7W (350mA/15V)
Lamp: EPISTAR COB (CRI>80)
AC: 200-240V

Beam Angle	Model	Lumen	Finish	LED Colour	LED Driver
36°	TC68051.2	550lm	1 Matt White	1 3000K	1 On and off
			2 Matt Black	2 4000K	2 Triac dimmable
			3 Silver	3 5000K	3 1~10V dimmable
				4 2000K - 2800K Dim to warm	4 Dali
				5 2700K	5 Bluetooth

LED Driver
LED Colour
Finish



TC68101




Power: 12W (260mA/36V)
Lamp: Bridgelux COB (CRI>80)
AC: 200-240V


Beam Angle	Model	Lumen	Finish	LED Colour	LED Driver
36°	TC68101.2	790lm	1 Matt White	1 3000K	1 On and off
			2 Matt Black	2 4000K	2 Triac dimmable
			3 Silver	3 5000K	3 1~10V dimmable
				4 2000K - 2800K Dim to warm	4 Dali
				5 2700K	5 Bluetooth

Arial

LED Driver
LED Colour
Finish




TC68151

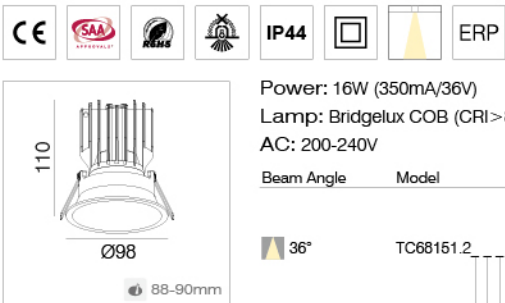

Power: 16W (350mA/36V)
Lamp: Bridgelux COB (CRI>80)
AC: 200-240V

Beam Angle	Model	Lumen	Finish	LED Colour	LED Driver
36°	TC68151.2	1290lm	1 Matt White	1 3000K	1 On and off
			2 Matt Black	2 4000K	2 Triac dimmable
			3 Silver	3 5000K	3 1~10V dimmable
				4 2000K - 2800K Dim to warm	4 Dali
				5 2700K	5 Bluetooth

LED Driver
LED Colour
Finish




Led recessed down light for hotel

Huzzi Fixed




DC21202

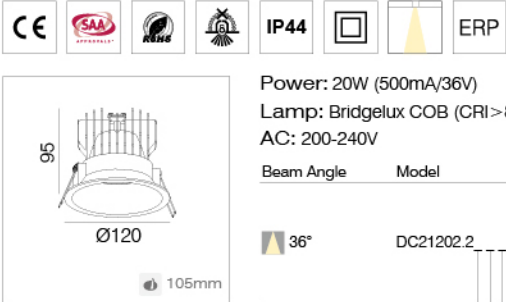


Power: 20W (500mA/36V)
Lamp: Bridgelux COB (CRI>80)
AC: 200-240V

Beam Angle	Model	Lumen	Finish	LED Colour	LED Driver
36°	DC21202.2	2100lm	1 Matt White	1 3000K	1 On and off
			2 Matt Black	2 4000K	2 Triac dimmable
			3 Silver	3 5000K	3 1~10V dimmable
				4 2000K - 2800K Dim to warm	4 Dali
				5 2700K	5 Bluetooth

LED Driver
LED Colour
Finish




DC21302

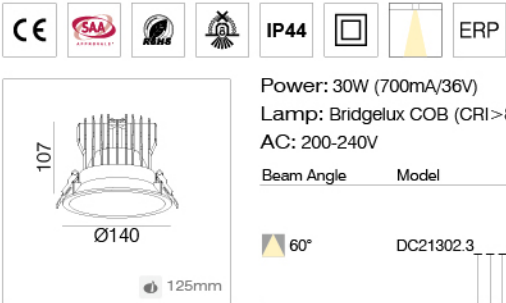


Power: 30W (700mA/36V)
Lamp: Bridgelux COB (CRI>80)
AC: 200-240V

Beam Angle	Model	Lumen	Finish	LED Colour	LED Driver
60°	DC21302.3	2600lm	1 Matt White	1 3000K	1 On and off
			2 Matt Black	2 4000K	2 Triac dimmable
			3 Silver	3 5000K	3 1~10V dimmable
				4 2000K - 2800K Dim to warm	4 Dali
				5 2700K	5 Bluetooth

LED Driver
LED Colour
Finish




DC21402

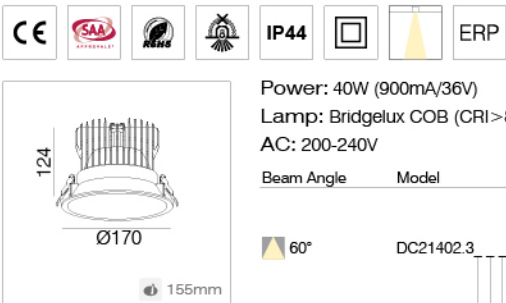

Power: 40W (900mA/36V)
Lamp: Bridgelux COB (CRI>80)
AC: 200-240V

Beam Angle	Model	Lumen	Finish	LED Colour	LED Driver
60°	DC21402.3	3500lm	1 Matt White	1 3000K	1 On and off
			2 Matt Black	2 4000K	2 Triac dimmable
			3 Silver	3 5000K	3 1~10V dimmable
				4 2000K - 2800K Dim to warm	4 Dali
				5 2700K	5 Bluetooth

LED Driver
LED Colour
Finish




Huzzi Fixed

Led recessed down light for hotel




TC68054



Power: 7W (350mA/15V)
Lamp: EPISTAR COB (CRI>80)
AC: 200-240V

Beam Angle	Model	Lumen	Finish	LED Colour	LED Driver
36°	TC68054.2	550lm	1 Matt White 2 Matt Black 3 Silver	1 3000K 2 4000K 3 5000K 4 2000K - 2800K Dim to warm 5 2700K	1 On and off 2 Triac dimmable 3 1~10V dimmable 4 Dali 5 Bluetooth

LED Driver
LED Colour
Finish




TC68104



Power: 12W (260mA/36V)
Lamp: Bridgelux COB (CRI>80)
AC: 200-240V

Beam Angle	Model	Lumen	Finish	LED Colour	LED Driver
36°	TC68104.2	790lm	1 Matt White 2 Matt Black 3 Silver	1 3000K 2 4000K 3 5000K 4 2000K - 2800K Dim to warm 5 2700K	1 On and off 2 Triac dimmable 3 1~10V dimmable 4 Dali 5 Bluetooth

LED Driver
LED Colour
Finish




TC68154



Power: 16W (350mA/36V)
Lamp: Bridgelux COB (CRI>80)
AC: 200-240V

Beam Angle	Model	Lumen	Finish	LED Colour	LED Driver
36°	TC68154.2	1290lm	1 Matt White 2 Matt Black 3 Silver	1 3000K 2 4000K 3 5000K 4 2000K - 2800K Dim to warm 5 2700K	1 On and off 2 Triac dimmable 3 1~10V dimmable 4 Dali 5 Bluetooth

LED Driver
LED Colour
Finish



Features

- 1. Imported genuine LED (COB), which is packaged by original manufacturer, energy-saving, eco-friendly and high efficient, perfectly restores the original vivid colour and effectively elevates your products appearance, creating a comfortable atmosphere. Life span expectancy 50,000 hours.
- 2. Unique optical design, precise light distribution and high efficient output, deliver more natural and soft light, with an elevated transparent diffuserequipped.
- 3. Compact, simple and elegant structure, high-quality aluminium alloy die-casting materials and perfect aerodynamic design, make the heat dissipation performance of the lamp body more excellent.
- 4. More wattages and CCT optional, for needs by various space.
- 5. Tilting angle 20° vertically each side.

Application

Places like museum and gallery.

Tiltable



High lumen

90lm/W

50000

50000hrs

More watt (6-15W)

More sizes

IP20

IP Level


IP44

UGR <19

UGR<19

Dimmable

More CCT

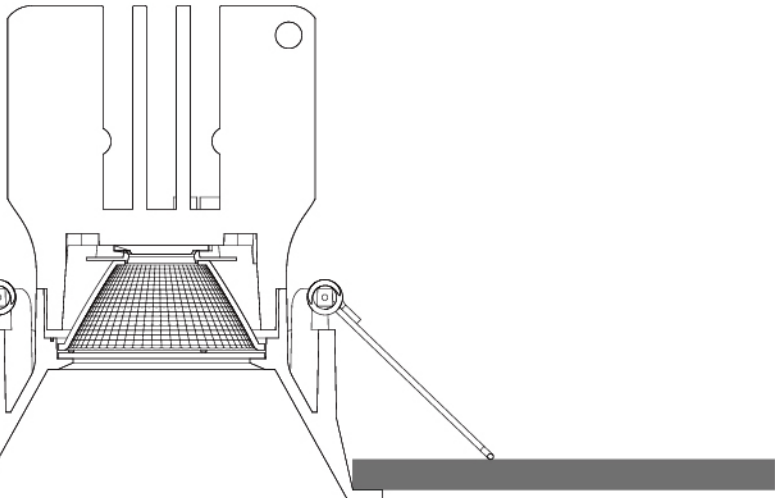

The width of trim is < 5mm for wattage from 6~15W;
< 9mm for 20W.



TC68052
7W(550lm)
68-70mm



TC68102
12W(790lm)
80-83mm



TC68152
16W(1290lm)
88-90mm



DC21202
20W(2000lm)
105mm



TC68055
7W(550lm)
70x70mm



TC68105
12W(790lm)
83x83mm




TC68155
16W(1290lm)
90x90mm



TC68052

CE SAA RoHS IP44 ERP



84
Ø75
±25°
68-70mm


Power: 7W (350mA/15V)
Lamp: EPISTAR COB (CRI>80)
AC: 200-240V

Beam Angle	Model	Lumen	Finish	LED Colour	LED Driver
36°	TC68052.2	550lm	1 Matt White 2 Matt Black 3 Silver	1 3000K 2 4000K 3 5000K 4 2000K - 2800K Dim to warm 5 2700K	1 On and off 2 Triac dimmable 3 1-10V dimmable 4 Dali 5 Bluetooth

LED Driver


LED Colour

Finish



TC68102

CE SAA RoHS IP44 ERP



96
Ø88
±25°
80-83mm


Power: 12W (260mA/36V)
Lamp: Bridgelux COB (CRI>80)
AC: 200-240V

Beam Angle	Model	Lumen	Finish	LED Colour	LED Driver
36°	TC68102.2	790lm	1 Matt White 2 Matt Black 3 Silver	1 3000K 2 4000K 3 5000K 4 2000K - 2800K Dim to warm 5 2700K	1 On and off 2 Triac dimmable 3 1-10V dimmable 4 Dali 5 Bluetooth

LED Driver

LED Colour

Finish




Huzzi Tilt

Led recessed down light for hotel




TC68152




Power: 16W (350mA/36V)
Lamp: Bridgelux COB (CRI>80)
AC: 200-240V

Beam Angle	Model	Lumen	Finish	LED Colour	LED Driver
36°	TC68152.2	1290lm	1 Matt White 2 Matt Black 3 Silver	1 3000K 2 4000K 3 5000K 4 2000K - 2800K Dim to warm 5 2700K	1 On and off 2 Triac dimmable 3 1~10V dimmable 4 Dali 5 Bluetooth

LED Driver
LED Colour
Finish




DC21203



Power: 20W (500mA/36V)
Lamp: Bridgelux COB (CRI>80)
AC: 200-240V

Beam Angle	Model	Lumen	Finish	LED Colour	LED Driver
24°	DC21203.1	2000lm	1 Matt White 2 Matt Black 3 Silver	1 3000K 2 4000K 3 5000K 4 2000K - 2800K Dim to warm 5 2700K	1 On and off 2 Triac dimmable 3 1~10V dimmable 4 Dali 5 Bluetooth
45°	DC21203.2	2000lm			

LED Driver
LED Colour
Finish




Led recessed down light for hotel

Huzzi Tilt




TC68055




Power: 7W (350mA/15V)
Lamp: EPISTAR COB (CRI>80)
AC: 200-240V

Beam Angle	Model	Lumen	Finish	LED Colour	LED Driver
36°	TC68055.2	550lm	1 Matt White 2 Matt Black 3 Silver	1 3000K 2 4000K 3 5000K 4 2000K - 2800K Dim to warm 5 2700K	1 On and off 2 Triac dimmable 3 1~10V dimmable 4 Dali 5 Bluetooth

LED Driver
LED Colour
Finish




TC68105




Power: 12W (260mA/36V)
Lamp: Bridgelux COB (CRI>80)
AC: 200-240V

Beam Angle	Model	Lumen	Finish	LED Colour	LED Driver
36°	TC68105.2	790lm	1 Matt White 2 Matt Black 3 Silver	1 3000K 2 4000K 3 5000K 4 2000K - 2800K Dim to warm 5 2700K	1 On and off 2 Triac dimmable 3 1~10V dimmable 4 Dali 5 Bluetooth

LED Driver
LED Colour
Finish




TC68155



Power: 16W (350mA/36V)
Lamp: Bridgelux COB (CRI>80)
AC: 200-240V

Beam Angle	Model	Lumen	Finish	LED Colour	LED Driver
36°	TC68155.2	1290lm	1 Matt White 2 Matt Black 3 Silver	1 3000K 2 4000K 3 5000K 4 2000K - 2800K Dim to warm 5 2700K	1 On and off 2 Triac dimmable 3 1~10V dimmable 4 Dali 5 Bluetooth

LED Driver
LED Colour
Finish





LED GRID LIGHT




Mega Mini: Fixed with size of multiple 1x, 3x, 6x, 9x and 12x.



Mega Mini: Fixed with size of multiple 1x, 3x, 6x, 9x and 12x.



Mega Mini: Fixed with size of multiple 1x, 3x, 6x, 9x and 12x.

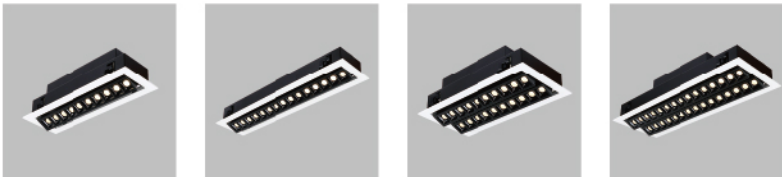

Mega Mini: Fixed with size of multiple 1x, 3x, 6x, 9x and 12x.




Mega Mini: Fixed with size of multiple 1x, 3x, 6x, 9x and 12x.

Mega Mini

Led recessed down light for hotel




TC36022

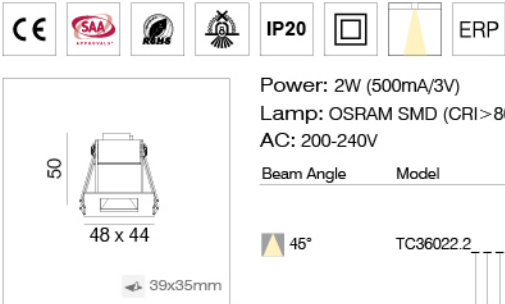


Power: 2W (500mA/3V)
Lamp: OSRAM SMD (CRI>80)
AC: 200-240V

Beam Angle	Model	Lumen	Finish	LED Colour	LED Driver
45°	TC36022.2	180lm	1 Matt White 2 Matt Black 3 Silver	1 3000K 2 4000K 3 5000K 5 2700K	1 On and off 2 Triac dimmable 3 1~10V dimmable 4 Dali 5 Bluetooth




TC36063

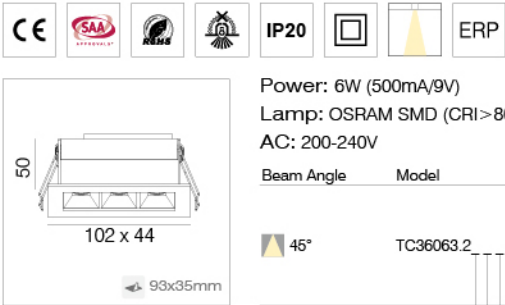


Power: 6W (500mA/9V)
Lamp: OSRAM SMD (CRI>80)
AC: 200-240V

Beam Angle	Model	Lumen	Finish	LED Colour	LED Driver
45°	TC36063.2	300lm	1 Matt White 2 Matt Black 3 Silver	1 3000K 2 4000K 3 5000K 5 2700K	1 On and off 2 Triac dimmable 3 1~10V dimmable 4 Dali 5 Bluetooth




TC36123

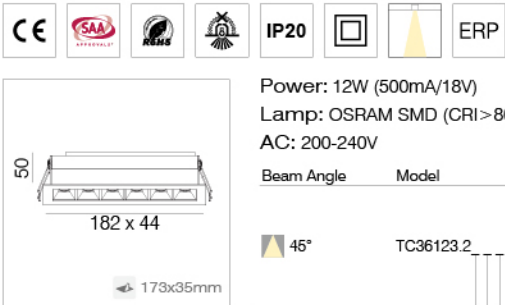


Power: 12W (500mA/18V)
Lamp: OSRAM SMD (CRI>80)
AC: 200-240V

Beam Angle	Model	Lumen	Finish	LED Colour	LED Driver
45°	TC36123.2	600lm	1 Matt White 2 Matt Black 3 Silver	1 3000K 2 4000K 3 5000K 5 2700K	1 On and off 2 Triac dimmable 3 1~10V dimmable 4 Dali 5 Bluetooth




Mega Mini

Led recessed down light for hotel





TC36163

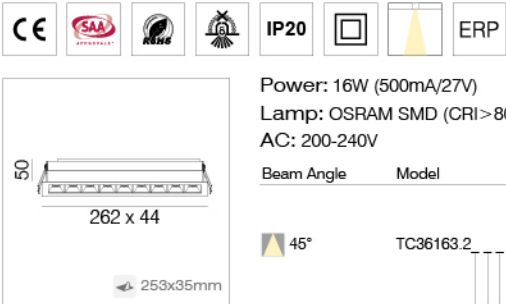


Power: 16W (500mA/27V)
Lamp: OSRAM SMD (CRI>80)
AC: 200-240V

Beam Angle	Model	Lumen	Finish	LED Colour	LED Driver
45°	TC36163.2	900lm	1 Matt White 2 Matt Black 3 Silver	1 3000K 2 4000K 3 5000K 5 2700K	1 On and off 2 Triac dimmable 3 1~10V dimmable 4 Dali 5 Bluetooth




TC36203

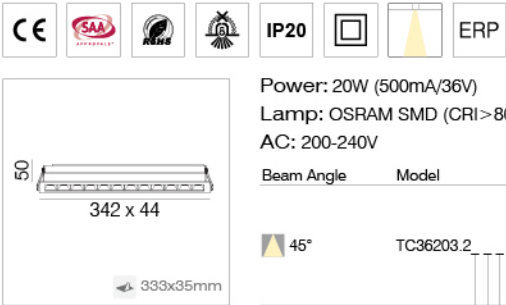


Power: 20W (500mA/36V)
Lamp: OSRAM SMD (CRI>80)
AC: 200-240V

Beam Angle	Model	Lumen	Finish	LED Colour	LED Driver
45°	TC36203.2	1200lm	1 Matt White 2 Matt Black 3 Silver	1 3000K 2 4000K 3 5000K 5 2700K	1 On and off 2 Triac dimmable 3 1~10V dimmable 4 Dali 5 Bluetooth







TC36023




Power: 2W (700mA/3V)
Lamp: OSRAM SMD (CRI>80)
AC: 200-240V

Beam Angle	Model	Lumen	Finish	LED Colour	LED Driver
45°	TC36023.2	120lm	1 Matt White 2 Matt Black 3 Silver	1 3000K 2 4000K 3 5000K 5 2700K	1 On and off 2 Triac dimmable 3 1~10V dimmable 4 Dali 5 Bluetooth

LED Driver
LED Colour
Finish




TC36042




Power: 4W (600mA/6V)
Lamp: OSRAM SMD (CRI>80)
AC: 200-240V

Beam Angle	Model	Lumen	Finish	LED Colour	LED Driver
45°	TC36042.2	210lm	1 Matt White 2 Matt Black 3 Silver	1 3000K 2 4000K 3 5000K 5 2700K	1 On and off 2 Triac dimmable 3 1~10V dimmable 4 Dali 5 Bluetooth

LED Driver
LED Colour
Finish




TC36102




Power: 10W (600mA/15V)
Lamp: OSRAM SMD (CRI>80)
AC: 200-240V

Beam Angle	Model	Lumen	Finish	LED Colour	LED Driver
45°	TC36102.2	650lm	1 Matt White 2 Matt Black 3 Silver	1 3000K 2 4000K 3 5000K 5 2700K	1 On and off 2 Triac dimmable 3 1~10V dimmable 4 Dali 5 Bluetooth

LED Driver
LED Colour
Finish




TC36202




Power: 20W (600mA/30V)
Lamp: OSRAM SMD (CRI>80)
AC: 200-240V

Beam Angle	Model	Lumen	Finish	LED Colour	LED Driver
45°	TC36202.2	1370lm	1 Matt White 2 Matt Black 3 Silver	1 3000K 2 4000K 3 5000K 5 2700K	1 On and off 2 Triac dimmable 3 1~10V dimmable 4 Dali 5 Bluetooth

LED Driver
LED Colour
Finish




TC36302



Power: 30W (600mA/45V)
Lamp: OSRAM SMD (CRI>80)
AC: 200-240V

Beam Angle	Model	Lumen	Finish	LED Colour	LED Driver
45°	TC36302.2	1900lm	1 Matt White 2 Matt Black 3 Silver	1 3000K 2 4000K 3 5000K 5 2700K	1 On and off 2 Triac dimmable 3 1~10V dimmable 4 Dali 5 Bluetooth

LED Driver
LED Colour
Finish




Mega Race

Led recessed down light for hotel




TC36024

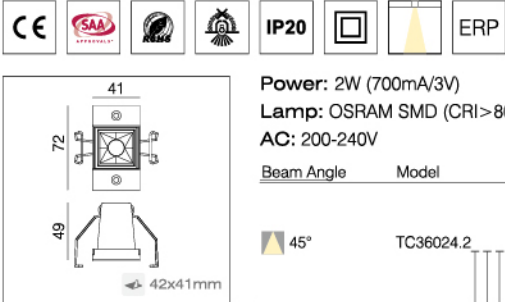


Power: 2W (700mA/3V)
Lamp: OSRAM SMD (CRI>80)
AC: 200-240V

Beam Angle	Model	Lumen	Finish	LED Colour	LED Driver
45°	TC36024.2	120lm	1 Matt White 2 Matt Black 3 Silver	1 3000K 2 4000K 3 5000K 5 2700K	1 On and off 2 Triac dimmable 3 1~10V dimmable 4 Dali 5 Bluetooth

LED Driver
LED Colour
Finish




TC36043

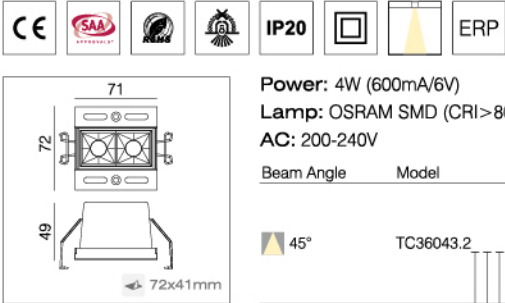


Power: 4W (600mA/6V)
Lamp: OSRAM SMD (CRI>80)
AC: 200-240V

Beam Angle	Model	Lumen	Finish	LED Colour	LED Driver
45°	TC36043.2	210lm	1 Matt White 2 Matt Black 3 Silver	1 3000K 2 4000K 3 5000K 5 2700K	1 On and off 2 Triac dimmable 3 1~10V dimmable 4 Dali 5 Bluetooth

LED Driver
LED Colour
Finish




TC36103

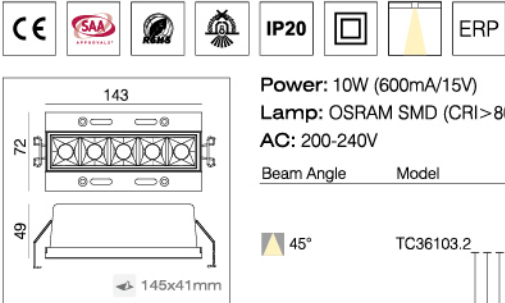

Power: 10W (600mA/15V)
Lamp: OSRAM SMD (CRI>80)
AC: 200-240V

Beam Angle	Model	Lumen	Finish	LED Colour	LED Driver
45°	TC36103.2	650lm	1 Matt White 2 Matt Black 3 Silver	1 3000K 2 4000K 3 5000K 5 2700K	1 On and off 2 Triac dimmable 3 1~10V dimmable 4 Dali 5 Bluetooth

LED Driver
LED Colour
Finish




Mega Race

Led recessed down light for hotel




TC36205

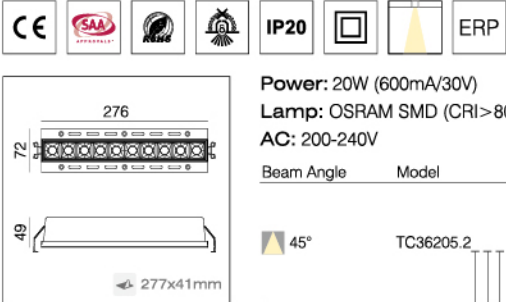


Power: 20W (600mA/30V)
Lamp: OSRAM SMD (CRI>80)
AC: 200-240V

Beam Angle	Model	Lumen	Finish	LED Colour	LED Driver
45°	TC36205.2	1370lm	1 Matt White 2 Matt Black 3 Silver	1 3000K 2 4000K 3 5000K 5 2700K	1 On and off 2 Triac dimmable 3 1~10V dimmable 4 Dali 5 Bluetooth

LED Driver
LED Colour
Finish




TC36303

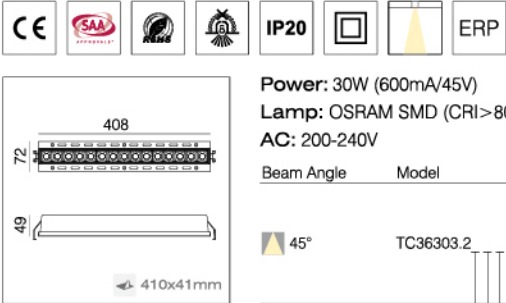

Power: 30W (600mA/45V)
Lamp: OSRAM SMD (CRI>80)
AC: 200-240V

Beam Angle	Model	Lumen	Finish	LED Colour	LED Driver
45°	TC36303.2	1900lm	1 Matt White 2 Matt Black 3 Silver	1 3000K 2 4000K 3 5000K 5 2700K	1 On and off 2 Triac dimmable 3 1~10V dimmable 4 Dali 5 Bluetooth

LED Driver
LED Colour
Finish



Mega Fela

Led recessed down light for hotel



TC37202

CE

SAA

RoHS

IP20

ERP

311

104


96

295x90mm

Power: 20W (600mA/30V)
Lamp: OSRAM SMD (CRI>80)
AC: 200-240V

Beam Angle	Model	Lumen	Finish	LED Colour	LED Driver
45°	TC37202.2	1250lm	1 Matt White 2 Matt Black 3 Silver	1 3000K 2 4000K 3 5000K 5 2700K	1 On and off 2 Triac dimmable 3 1~10V dimmable 4 Dali 5 Bluetooth

LED Driver
LED Colour
Finish



TC37302

CE

SAA

RoHS

IP20

ERP

444

104


96

425x90mm

Power: 30W (600mA/45V)
Lamp: OSRAM SMD (CRI>80)
AC: 200-240V

Beam Angle	Model	Lumen	Finish	LED Colour	LED Driver
45°	TC37302.2	1900lm	1 Matt White 2 Matt Black 3 Silver	1 3000K 2 4000K 3 5000K 5 2700K	1 On and off 2 Triac dimmable 3 1~10V dimmable 4 Dali 5 Bluetooth

LED Driver
LED Colour
Finish



TC37402

CE

SAA

RoHS

IP20

ERP

311

159


96

295x145mm

Power: 40W (1200mA/30V)
Lamp: OSRAM SMD (CRI>80)
AC: 200-240V

Beam Angle	Model	Lumen	Finish	LED Colour	LED Driver
45°	TC37402.2	2400lm	1 Matt White 2 Matt Black 3 Silver	1 3000K 2 4000K 3 5000K 5 2700K	1 On and off 2 Triac dimmable 3 1~10V dimmable 4 Dali 5 Bluetooth

LED Driver
LED Colour
Finish



Mega Fela

Led recessed down light for hotel



TC37602

CE

SAA

RoHS

IP20

ERP

444

159


96

425x145mm

Power: 60W (1200mA/45V)
Lamp: OSRAM SMD (CRI>80)
AC: 200-240V

Beam Angle	Model	Lumen	Finish	LED Colour	LED Driver
45°	TC37602.2	3700lm	1 Matt White 2 Matt Black 3 Silver	1 3000K 2 4000K 3 5000K 5 2700K	1 On and off 2 Triac dimmable 3 1~10V dimmable 4 Dali 5 Bluetooth

LED Driver
LED Colour
Finish




Mega Diana

Led recessed down light for hotel




TC37055

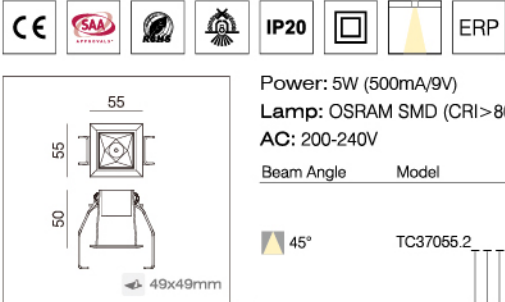


Power: 5W (500mA/9V)
Lamp: OSRAM SMD (CRI>80)
AC: 200-240V

Beam Angle	Model	Lumen	Finish	LED Colour	LED Driver
45°	TC37055.2	250lm	1 Matt White 2 Matt Black 3 Silver	1 3000K 2 4000K 3 5000K 5 2700K	1 On and off 2 Triac dimmable 3 1~10V dimmable 4 Dali 5 Bluetooth

LED Driver
LED Colour
Finish




TC37122

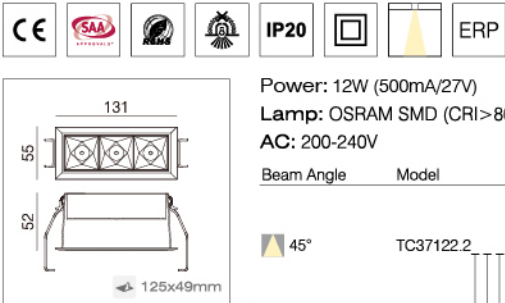


Power: 12W (500mA/27V)
Lamp: OSRAM SMD (CRI>80)
AC: 200-240V

Beam Angle	Model	Lumen	Finish	LED Colour	LED Driver
45°	TC37122.2	600lm	1 Matt White 2 Matt Black 3 Silver	1 3000K 2 4000K 3 5000K 5 2700K	1 On and off 2 Triac dimmable 3 1~10V dimmable 4 Dali 5 Bluetooth

LED Driver
LED Colour
Finish




TC37152

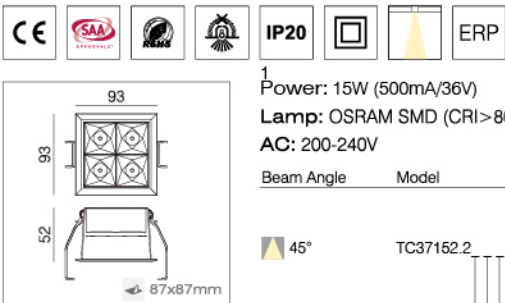

Power: 15W (500mA/36V)
Lamp: OSRAM SMD (CRI>80)
AC: 200-240V

Beam Angle	Model	Lumen	Finish	LED Colour	LED Driver
45°	TC37152.2	800lm	1 Matt White 2 Matt Black 3 Silver	1 3000K 2 4000K 3 5000K 5 2700K	1 On and off 2 Triac dimmable 3 1~10V dimmable 4 Dali 5 Bluetooth

LED Driver
LED Colour
Finish




Led recessed down light for hotel

Mega Diana




TC37203

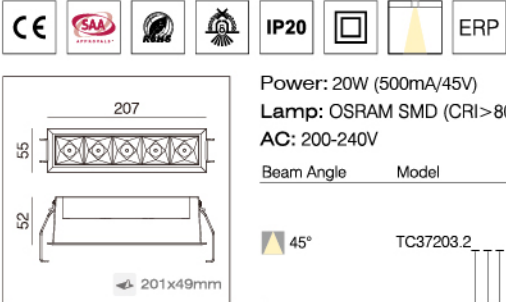


Power: 20W (500mA/45V)
Lamp: OSRAM SMD (CRI>80)
AC: 200-240V

Beam Angle	Model	Lumen	Finish	LED Colour	LED Driver
45°	TC37203.2	1000lm	1 Matt White 2 Matt Black 3 Silver	1 3000K 2 4000K 3 5000K 5 2700K	1 On and off 2 Triac dimmable 3 1~10V dimmable 4 Dali 5 Bluetooth

LED Driver
LED Colour
Finish




TC37362

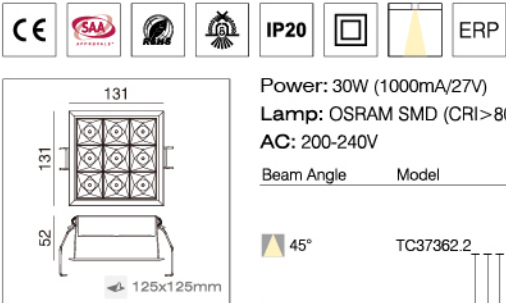


Power: 30W (1000mA/27V)
Lamp: OSRAM SMD (CRI>80)
AC: 200-240V

Beam Angle	Model	Lumen	Finish	LED Colour	LED Driver
45°	TC37362.2	2000lm	1 Matt White 2 Matt Black 3 Silver	1 3000K 2 4000K 3 5000K 5 2700K	1 On and off 2 Triac dimmable 3 1~10V dimmable 4 Dali 5 Bluetooth

LED Driver
LED Colour
Finish




TC37403

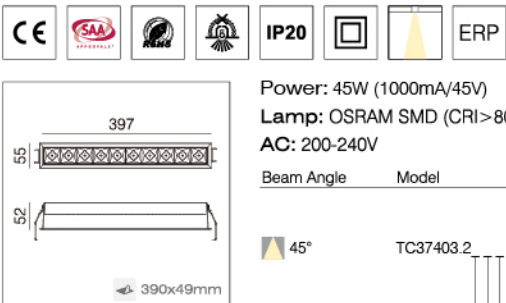

Power: 45W (1000mA/45V)
Lamp: OSRAM SMD (CRI>80)
AC: 200-240V

Beam Angle	Model	Lumen	Finish	LED Colour	LED Driver
45°	TC37403.2	2400lm	1 Matt White 2 Matt Black 3 Silver	1 3000K 2 4000K 3 5000K 5 2700K	1 On and off 2 Triac dimmable 3 1~10V dimmable 4 Dali 5 Bluetooth

LED Driver
LED Colour
Finish



Features


- 1. High quality, high efficiency, high CRI chips. There is a variety of beam angle for optional. It has very good physical heat dissipation with high precision die-casting aluminum, so as to ensure long lifespan. With flicker free driver and compliance with CE, SAA, UKCA certified.
- 2. A full range of surface mounted, 48V low voltage track and high voltage track lights.
- 3. 355 degrees horizontally rotation of the lamp body. Different connectors can be customized made to match all range of the track lights in the market.
- 4. Anti glare ring in black, clear, slight black, slight purple, matt black for optional, which will be applied to different scenarios perfectly.

Application

Stairs indoor




TC36106



Power: 10W (250mA/30V)
Lamp: LIGHTNING SMD (CRI>80)
AC: 200-240V


Beam Angle	Model	Lumen	Finish	LED Colour	LED Driver
12°	TC36106.1_ _ _	500lm	1 Matt White	1 2700K	1 On and off
34°	TC36106.2_ _ _	500lm	2 Matt Black	2 3000K	2 Triac dimmable
48°	TC36106.3_ _ _	500lm	3 Silver	3 4000K	3 1~10V dimmable
				4 5000K	4 Dali
					5 Bluetooth

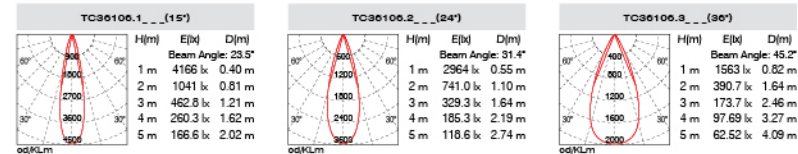

Led recessed down light for hotel





TC36206




Power: 20W (500mA/30V)
Lamp: LIGHTNING SMD (CRI>80)
AC: 200-240V

Beam Angle	Model	Lumen	Finish	LED Colour	LED Driver
12°	TC36206.1_ _ _	1000lm	1 Matt White	1 2700K	1 On and off
34°	TC36206.2_ _ _	1000lm	2 Matt Black	2 3000K	2 Triac dimmable
48°	TC36206.3_ _ _	1000lm	3 Silver	3 4000K	3 1~10V dimmable
				4 5000K	4 Dali
					5 Bluetooth

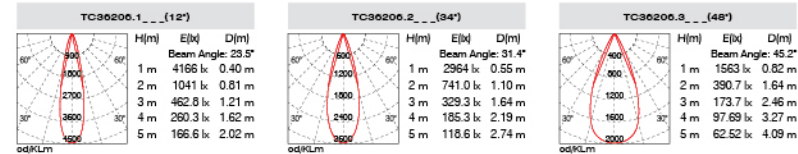


TC36107




Power: 10W (250mA/30V)
Lamp: LIGHTNING SMD (CRI>80)
AC: 200-240V

Beam Angle	Model	Lumen	Finish	LED Colour	LED Driver
12°	TC36107.1_ _ _	500lm	1 Matt White	1 2700K	1 On and off
34°	TC36107.2_ _ _	500lm	2 Matt Black	2 3000K	2 Triac dimmable
48°	TC36107.3_ _ _	500lm	3 Silver	3 4000K	3 1~10V dimmable
				4 5000K	4 Dali
					5 Bluetooth

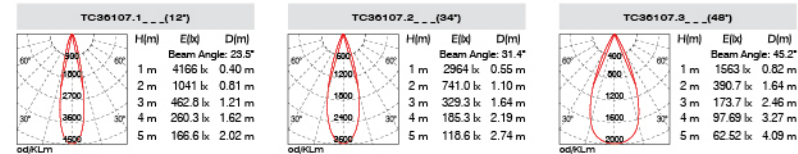


TC36207



Power: 20W (500mA/30V)
Lamp: LIGHTNING SMD (CRI>80)
AC: 200-240V

Beam Angle	Model	Lumen	Finish	LED Colour	LED Driver
12°	TC36207.1_ _ _	1000lm	1 Matt White	1 2700K	1 On and off
34°	TC36207.2_ _ _	1000lm	2 Matt Black	2 3000K	2 Triac dimmable
48°	TC36207.3_ _ _	1000lm	3 Silver	3 4000K	3 1~10V dimmable
				4 5000K	4 Dali
					5 Bluetooth

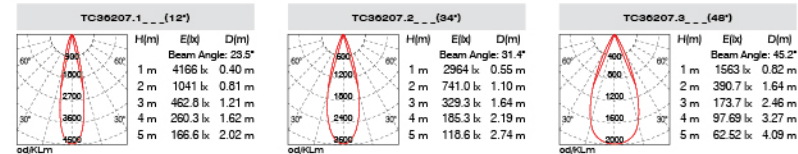

Features

- 1. High quality, high efficiency, high CRI chips. There is a variety of beam angle for optional. It has very good aluminum, so as to ensure long lifespan. With flicker free driver and compliance with CE, SAA, UKCA certified.
- 2. A full range of surface mounted, 48V low voltage track and high voltage track lights.
- 3. 355 degrees horizontally rotation of the lamp body. Different connectors can be customized made to match all range of the track lights in the market.
- 4. Anti glare ring in black, clear, slight black, slight purple, matt black for optional, which will be applied to different scenarios perfectly.

Application

Shops, hotel, exhibition center, etc.



DG36108


Power: 10W (250mA/30V)
Lamp: LIGHTNING SMD (CRI>80)
DC:48V

Beam Angle	Model	Lumen	Finish	LED Colour	LED Driver
12°	DG36108.1_	500lm	1 Matt White	1 3000K	1 On and off
34°	DG36108.2_	500lm	2 Matt Black	2 4000K	2 1~10V dimmable
48°	DG36108.3	500lm	3 5000K	3 5000K	3 Dali

LED Driver

LED Colour

Finish

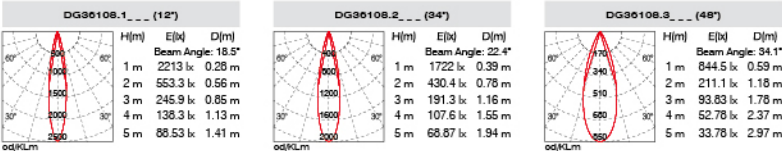

Led recessed down light for hotel



DG36208

Power: 20W (500mA/30V)
Lamp: LIGHTNING SMD (CRI>80)
DC:48V

Beam Angle	Model	Lumen	Finish	LED Colour	LED Driver
12°	DG36208.1_	1000lm	1 Matt White	1 3000K	1 On and off
34°	DG36208.2_	1000lm	2 Matt Black	2 4000K	2 1~10V dimmable
48°	DG36208.3	1000lm	3 5000K	3 5000K	3 Dali

LED Driver

LED Colour

Finish

DG36208.1_ (12°)

H[m]	E[lx]	D[m]
1m	2213 lx	0.28 m
2m	553.3 lx	0.56 m
3m	245.9 lx	0.85 m
4m	138.3 lx	1.13 m
5m	88.53 lx	1.41 m

Beam Angle: 18.5°

DG36208.2_ (34°)

H[m]	E[lx]	D[m]
1m	1722 lx	0.39 m
2m	430.4 lx	0.78 m
3m	191.3 lx	1.16 m
4m	107.6 lx	1.55 m
5m	68.87 lx	1.94 m

Beam Angle: 22.4°

DG36208.3_ (48°)

H[m]	E[lx]	D[m]
1m	844.5 lx	0.59 m
2m	211.1 lx	1.18 m
3m	93.83 lx	1.78 m
4m	52.78 lx	2.37 m
5m	33.78 lx	2.97 m

Beam Angle: 34.1°



DG36109

Power: 10W (250mA/30V)
Lamp: LIGHTNING SMD (CRI>80)
DC:48V

Beam Angle	Model	Lumen	Finish	LED Colour	LED Driver
15°	DG36109.1_	500lm	1 Matt White	1 3000K	1 On and off
30°	DG36109.2_	500lm	2 Matt Black	2 4000K	2 1~10V dimmable
45°	DG36109.3	500lm	3 Silver	3 5000K	3 Dali

LED Driver

LED Colour

Finish

DG36109.1_ (15°)

H[m]	E[lx]	D[m]
1m	4601 lx	0.26 m
2m	1150 lx	0.52 m
3m	511.2 lx	0.78 m
4m	227.2 lx	1.05 m
5m	184.0 lx	1.31 m

Beam Angle: 14.96°

DG36109.2_ (30°)

H[m]	E[lx]	D[m]
1m	2379 lx	0.46 m
2m	594.8 lx	0.92 m
3m	264.4 lx	1.40 m
4m	148.7 lx	1.87 m
5m	95.17 lx	2.34 m

Beam Angle: 26.37°

DG36109.3_ (45°)

H[m]	E[lx]	D[m]
1m	1376 lx	0.69 m
2m	344.0 lx	1.39 m
3m	152.9 lx	2.09 m
4m	86.00 lx	2.79 m
5m	55.04 lx	3.49 m

Beam Angle: 38.53°



DG36209

Power: 20W (500mA/30V)
Lamp: LIGHTNING SMD (CRI>80)
DC:48V

Beam Angle	Model	Lumen	Finish	LED Colour	LED Driver
15°	DG36209.1_	1000lm	1 Matt White	1 3000K	1 On and off
30°	DG36209.2_	1000lm	2 Matt Black	2 4000K	2 1~10V dimmable
45°	DG36209.3	1000lm	3 Silver	3 5000K	3 Dali

LED Driver

LED Colour

Finish

DG36209.1_ (15°)

H[m]	E[lx]	D[m]
1m	9179 lx	0.26 m
2m	2295 lx	0.53 m
3m	1020 lx	0.80 m
4m	573.7 lx	1.07 m
5m	367.2 lx	1.34 m

Beam Angle: 15.36°

DG36209.2_ (30°)

H[m]	E[lx]	D[m]
1m	4263 lx	0.50 m
2m	1066 lx	1.00 m
3m	437.7 lx	1.51 m
4m	266.4 lx	2.01 m
5m	170.5 lx	2.52 m

Beam Angle: 28.31°

DG36209.3_ (45°)

H[m]	E[lx]	D[m]
1m	2610 lx	0.70 m
2m	702.4 lx	1.41 m
3m	312.2 lx	2.11 m
4m	175.6 lx	2.82 m
5m	112.4 lx	3.53 m

Beam Angle: 38.91°

Features

- 1. High quality, high efficiency, high CRI chips. There is a variety of beam angle for optional. It has very good physical heat dissipation with high precision die-casting aluminum, so as to ensure long lifespan. With flicker free driver and compliance with CE, SAA, UKCA certified.
- 2. A full range of surface mounted, 48V low voltage track and high voltage track lights.
- 3. 355 degrees horizontally rotation of the lamp body. Different connectors can be customized made to match all range of the track lights in the market.
- 4. Anti glare ring in black, clear, slight black, slight purple, matt black for optional, which will be applied to different scenarios perfectly.


Application

Shops, hotel, exhibition center, etc.





CE, IP20, ERP



Power: 10W (250mA/30V)
Lamp: LIGHTNING SMD (CRI>80)
AC: 200-240V

Beam Angle	Model	Lumen	Finish	LED Colour	LED Driver
12°	DG36111.1_ _ _	500lm	1 Matt White 2 Matt Black	1 3000K 2 4000K 3 5000K	1 On and off 2 1~10V dimmable 3 Dali
34°	DG36111.2_ _ _	500lm			
48°	DG36111.3_ _ _	500lm			

LED Driver
LED Colour
Finish

DG36111.1_ _ _ (12°)

H(m)	E(lx)	D(m)
1m	2213 lx	0.28 m
2m	553.3 lx	0.56 m
3m	245.9 lx	0.85 m
4m	138.3 lx	1.13 m
5m	88.53 lx	1.41 m

Beam Angle: 18.5°

DG36111.2_ _ _ (34°)

H(m)	E(lx)	D(m)
1m	1722 lx	0.39 m
2m	430.4 lx	0.78 m
3m	191.3 lx	1.16 m
4m	107.6 lx	1.55 m
5m	68.87 lx	1.94 m

Beam Angle: 22.4°

DG36111.3_ _ _ (48°)


H(m)	E(lx)	D(m)
1m	844.5 lx	0.59 m
2m	211.1 lx	1.16 m
3m	93.83 lx	1.78 m
4m	52.78 lx	2.37 m
5m	33.78 lx	2.97 m

Beam Angle: 34.1°

DG36111



CE, IP20, ERP



Power: 20W (500mA/30V)
Lamp: LIGHTNING SMD (CRI>80)
AC: 200-240V

Beam Angle	Model	Lumen	Finish	LED Colour	LED Driver
12°	DG36211.1_ _ _	1000lm	1 Matt White 2 Matt Black	1 3000K 2 4000K 3 5000K	1 On and off 2 1~10V dimmable 3 Dali
34°	DG36211.2_ _ _	1000lm			
48°	DG36211.3_ _ _	1000lm			

LED Driver
LED Colour
Finish

DG36211.1_ _ _ (12°)

H(m)	E(lx)	D(m)
1m	2213 lx	0.28 m
2m	553.3 lx	0.56 m
3m	245.9 lx	0.85 m
4m	138.3 lx	1.13 m
5m	88.53 lx	1.41 m

Beam Angle: 18.5°

DG36211.2_ _ _ (34°)

H(m)	E(lx)	D(m)
1m	1722 lx	0.39 m
2m	430.4 lx	0.78 m
3m	191.3 lx	1.16 m
4m	107.6 lx	1.55 m
5m	68.87 lx	1.94 m

Beam Angle: 22.4°

DG36211.3_ _ _ (48°)


H(m)	E(lx)	D(m)
1m	844.5 lx	0.59 m
2m	211.1 lx	1.16 m
3m	93.83 lx	1.78 m
4m	52.78 lx	2.37 m
5m	33.78 lx	2.97 m

Beam Angle: 34.1°

DG36211



CE, IP20, ERP



Power: 10W (250mA/30V)
Lamp: LIGHTNING SMD (CRI>80)
AC: 200-240V

Beam Angle	Model	Lumen	Finish	LED Colour	LED Driver
15°	DG36112.1_ _ _	500lm	1 Matt White 2 Matt Black 3 Silver	1 3000K 2 4000K 3 5000K	1 On and off 2 1~10V dimmable 3 Dali
30°	DG36112.2_ _ _	500lm			
45°	DG36112.3_ _ _	500lm			

LED Driver
LED Colour
Finish

DG36112.1_ _ _ (15°)

H(m)	E(lx)	D(m)
1m	4601 lx	0.26 m
2m	1150 lx	0.52 m
3m	511.2 lx	0.78 m
4m	227.2 lx	1.05 m
5m	184.0 lx	1.31 m

Beam Angle: 14.96°

DG36112.2_ _ _ (30°)

H(m)	E(lx)	D(m)
1m	2379 lx	0.46 m
2m	594.8 lx	0.92 m
3m	264.4 lx	1.40 m
4m	148.7 lx	1.87 m
5m	95.17 lx	2.34 m

Beam Angle: 26.37°

DG36112.3_ _ _ (45°)


H(m)	E(lx)	D(m)
1m	1376 lx	0.69 m
2m	344.0 lx	1.39 m
3m	152.9 lx	2.09 m
4m	86.00 lx	2.79 m
5m	55.04 lx	3.49 m

Beam Angle: 38.53°

DG36112



CE, IP20, ERP



Power: 20W (500mA/30V)
Lamp: LIGHTNING SMD (CRI>80)
AC: 200-240V

Beam Angle	Model	Lumen	Finish	LED Colour	LED Driver
15°	DG36212.1_ _ _	1000lm	1 Matt White 2 Matt Black 3 Silver	1 3000K 2 4000K 3 5000K	1 On and off 2 1~10V dimmable 3 Dali
30°	DG36212.2_ _ _	1000lm			
45°	DG36212.3_ _ _	1000lm			

LED Driver
LED Colour
Finish

DG36212.1_ _ _ (15°)

H(m)	E(lx)	D(m)
1m	9179 lx	0.26 m
2m	2295 lx	0.53 m
3m	1020 lx	0.80 m
4m	573.7 lx	1.07 m
5m	367.2 lx	1.34 m

Beam Angle: 15.96°

DG36212.2_ _ _ (30°)

H(m)	E(lx)	D(m)
1m	4263 lx	0.50 m
2m	1066 lx	1.00 m
3m	437.7 lx	1.51 m
4m	266.4 lx	2.01 m
5m	170.5 lx	2.52 m

Beam Angle: 28.31°

DG36212.3_ _ _ (45°)

H(m)	E(lx)	D(m)
1m	2610 lx	0.70 m
2m	702.4 lx	1.41 m
3m	312.2 lx	2.11 m
4m	175.6 lx	2.82 m
5m	112.4 lx	3.53 m

Beam Angle: 38.91°

DG36212

M . Art Double circle

Led recessed down light for living rooms

Features

- 1. Efficient, long lifespan, energy saving with latest genuine imported COB.
- 2. Die-casting heat sink of advanced design, made from high grade aluminum alloy, guarantees for a longer lifespan.
- 3. Round and square front combination by your wish, various cutout diameters from 80 to 83mm. Protective PMMA diffuser at front, easier for maintenance and cleaning.
- 4. Curved light outlet, for a better anti-glare performance while keeping an elegant design.
- 5. Easier installation with springs at both sides.

Application

House, lounge, museum and gallery etc.



50000hrs

More watt (9-12W)

More sizes

IP Level

Dimmable

More CCT



M . Art Double circle

Led recessed down light for living rooms


CE, SAA, RoHS, Energy Star, IP20, Square, Cone, ERP

Power: 7W (350mA/15V)
Lamp: EPISTAR COB (CRI>80)
AC: 200-240V

Beam Angle	Model	Lumen	Finish	LED Colour	LED Driver
36°	TC25054.2	440lm	1 Matt White	1 3000K	1 On and off
			2 Matt Black	2 4000K	2 Triac dimmable
			3 Silver	3 5000K	3 1~10V dimmable
			4 2000K - 2800K Dim to warm	4 Dali	
			5 2700K	5 Bluetooth	

LED Driver, LED Colour, Finish

TC25054




CE, SAA, RoHS, Energy Star, IP20, Square, Cone, ERP

Power: 9W (200mA/36V)
Lamp: EPISTAR COB (CRI>80)
AC: 200-240V

Beam Angle	Model	Lumen	Finish	LED Colour	LED Driver
36°	TC28073.2	740lm	1 Matt White	1 3000K	1 On and off
			2 Matt Black	2 4000K	2 Triac dimmable
			3 Silver	3 5000K	3 1~10V dimmable
55°	TC28073.3	740lm	4 2000K - 2800K Dim to warm	4 Dali	5 Bluetooth
			5 2700K		

LED Driver, LED Colour, Finish

TC28073

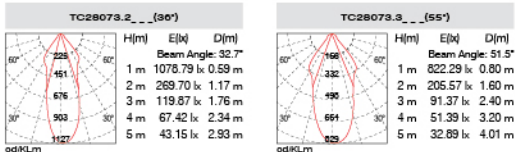


CE, SAA, RoHS, Energy Star, IP20, Square, Cone, ERP

Power: 15W (350mA/36V)
Lamp: EPISTAR COB (CRI>80)
AC: 200-240V

Beam Angle	Model	Lumen	Finish	LED Colour	LED Driver
36°	TC28153.2	1390lm	1 Matt White	1 3000K	1 On and off
			2 Matt Black	2 4000K	2 Triac dimmable
			3 Silver	3 5000K	3 1~10V dimmable
			4 2000K - 2800K Dim to warm	4 Dali	
			5 2700K	5 Bluetooth	

LED Driver, LED Colour, Finish

TC28153




M . Art Double circle


Led recessed down light for living rooms




TC61102

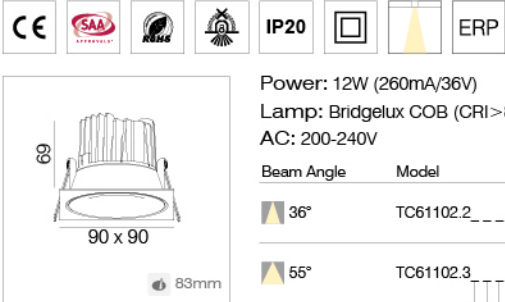


Power: 12W (260mA/36V) Lamp: Bridgelux COB (CRI>80) AC: 200-240V				
Beam Angle	Model	Lumen	Finish	LED Driver
36°	TC61102.2_	710lm	1 Matt White 2 Matt Black 3 Silver	1 3000K 2 4000K 3 5000K 4 2000K - 2800K Dim to warm 5 2700K
55°	TC61102.3	710lm		1 On and off 2 Triac dimmable 3 1~10V dimmable 4 Dali 5 Bluetooth

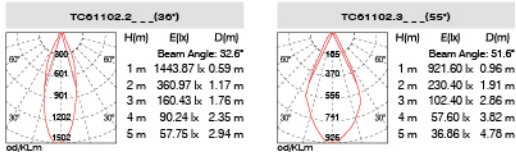


TC60102

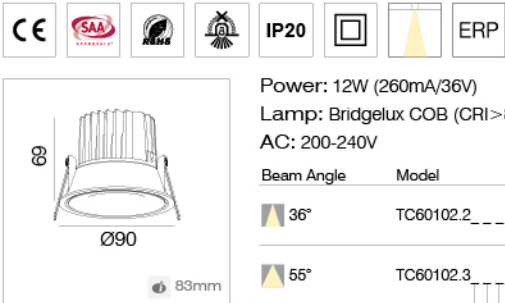


Power: 12W (260mA/36V) Lamp: Bridgelux COB (CRI>80) AC: 200-240V				
Beam Angle	Model	Lumen	Finish	LED Driver
36°	TC60102.2_	710lm	1 Matt White 2 Matt Black 3 Silver	1 3000K 2 4000K 3 5000K 4 2000K - 2800K Dim to warm 5 2700K
55°	TC60102.3	710lm		1 On and off 2 Triac dimmable 3 1~10V dimmable 4 Dali 5 Bluetooth

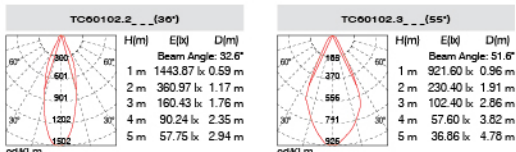

TC62102

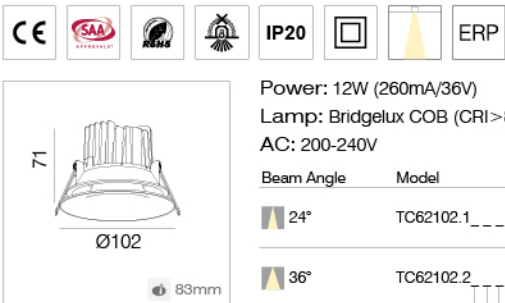

Power: 12W (260mA/36V) Lamp: Bridgelux COB (CRI>80) AC: 200-240V				
Beam Angle	Model	Lumen	Finish	LED Driver
24°	TC62102.1_	840lm	1 Matt White 2 Matt Black 3 Silver	1 3000K 2 4000K 3 5000K 4 2000K - 2800K Dim to warm 5 2700K
36°	TC62102.2	840lm		1 On and off 2 Triac dimmable 3 1~10V dimmable 4 Dali 5 Bluetooth

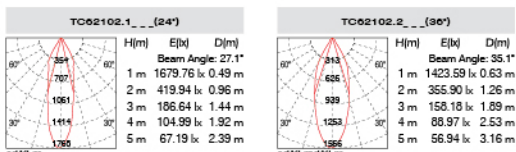

M . Art Low glare

Led recessed down light for living rooms

Features

- 1. Efficient, long lifespan, energy saving with latest genuine imported COB.
- 2. Die-casting heat sink of advanced design, made from high grade aluminum alloy, guarantees for a longer lifespan.
- 3. Round and square front combination by your wish, various cutout diameters from 80 to 83mm. Protective PMMA diffuser at front, easier for maintenance and cleaning.
- 4. Curved light outlet, for a better anti-glare performance while keeping an elegant design.
- 5. Easier installation with springs at both sides.

Application

House, lounge, museum and gallery etc.





50000hrs



More watt
(7-15W)



More sizes



IP Level



Dimmable




More CCT



M . Art Low glare

Led recessed down light for living rooms





42.7
Ø80
68-70mm



IP20



ERP


Power: 7W (350mA/15V)
Lamp: EPISTAR COB (CRI>80)
AC: 200-240V

Beam Angle	Model	Lumen	Finish	LED Colour	LED Driver
36°	TC25053.2	440lm	 1 Matt White	 1 3000K	 1 On and off
			 2 Matt Black	 2 4000K	 2 Triac dimmable
			 3 Silver	 3 5000K	 3 1~10V dimmable
				 5 2700K	 4 Dali
					 5 Bluetooth

LED Driver


LED Colour

Finish



TC25053





48
Ø90
80mm



IP20



ERP


Power: 9W (200mA/36V)
Lamp: EPISTAR COB (CRI>80)
AC: 200-240V

Beam Angle	Model	Lumen	Finish	LED Colour	LED Driver
36°	TC25101.2	770lm	 1 Matt White	 1 3000K	 1 On and off
			 2 Matt Black	 2 4000K	 2 Triac dimmable
			 3 Silver	 3 5000K	 3 1~10V dimmable
				 4 2000K - 2800K Dim to warm	 4 Dali
				 5 2700K	 5 Bluetooth

LED Driver


LED Colour

Finish



TC25101





55
Ø105
90-92mm



IP20



ERP


Power: 15W (350mA/36V)
Lamp: EPISTAR COB (CRI>80)
AC: 200-240V

Beam Angle	Model	Lumen	Finish	LED Colour	LED Driver
36°	TC25153.2	1390lm	 1 Matt White	 1 3000K	 1 On and off
			 2 Matt Black	 2 4000K	 2 Triac dimmable
			 3 Silver	 3 5000K	 3 1~10V dimmable
				 4 2000K - 2800K Dim to warm	 4 Dali
				 5 2700K	 5 Bluetooth

LED Driver

LED Colour

Finish



TC25153

M . Art Surface mounted

Led recessed down light for living rooms

Features

- 1. Low glare, no flickering for eye protection, 90 ° vertical, 350 ° horizontal rotation, quick switch of direction to the illuminated object. Suitable for wall and ceiling installation.
- 2. High efficient, energy saving, eco-friendly downlight, with latest genuine imported COB, perfectly restores the original vivid colour. Improved appearance, creates a comfortable atmosphere. Long lifespan up to 50,000 hours.
- 3. Unique optical design, accurately present angel aura, accurate light distribution, high light efficient output, natural, soft and even light, by protective cover with high transparency.
- 4. The shape integrates minimalist art design concept, compact and elegant structure, high-quality aluminum alloy die casting material and perfect aerodynamic design, advanced heat dissipation design makes the heat dissipation performance of the lamp body more outstanding.
- 5. One, two, three and four spots as options, and various power options can meet different space light requirements.
- 6. Three CCT changeable, 3000-4000-5000K or 2700-3300-4000K as options
- 7. Suitable for household cabinet decoration and shop lighting.

Application

House, museums and art galleries.





50000hrs
50000



More watt
(9W-52W)



More sizes
(single & double)



IP20 IP Level



350° horizontally
350°



90° vertically
90°




More CCT



M . Art Surface mounted

Led recessed down light for living rooms

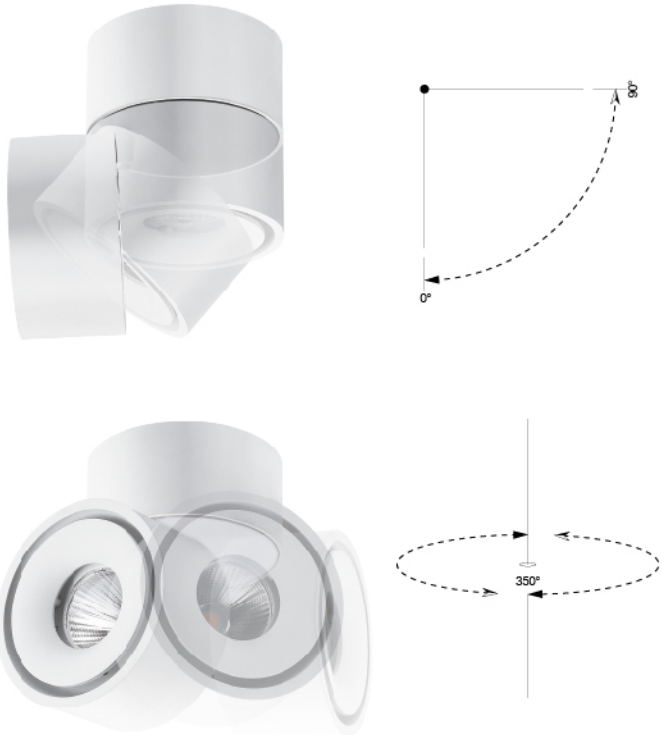


By every rotation,
And every beam of light,
You could feel the
thoughtfulness and
attentiveness from us
that all conveyed.



M . Art Surface mounted



NEW Led recessed down light for living rooms



Power: 9W (200mA/36V)
Lamp: EPISTAR COB (CRI>80)
AC: 200-240V

Beam Angle	Model	Lumen	Finish	LED Colour	LED Driver
36°	DC22073.2_	730lm	1 Matt White 2 Matt Black 3 Silver	1 3000K 2 4000K 3 5000K 4 2000K - 2800K Dim to warm 5 2700K 6 3000K-4000K-5000K	1 On and off 2 Triac dimmable
55°	DC22073.3_	730lm			



DC22073

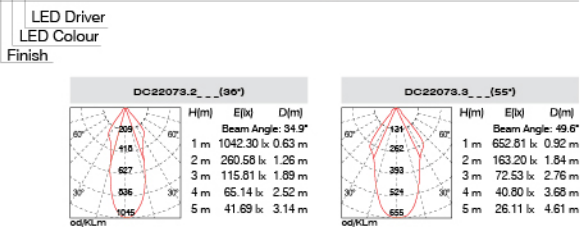

Power: 2x9W (400mA/36V)
Lamp: EPISTAR COB (CRI>80)
AC: 200-240V

Beam Angle	Model	Lumen	Finish	LED Colour	LED Driver
36°	DC22014.2_	1400lm	1 Matt White 2 Matt Black 3 Silver	1 3000K 2 4000K 3 5000K 4 2000K - 2800K Dim to warm 5 2700K 6 3000K-4000K-5000K	1 On and off 2 Triac dimmable
55°	DC22014.3_	1400lm			


DC22014

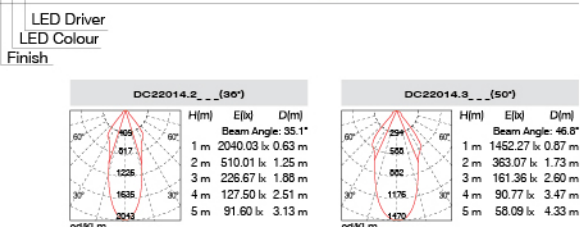

Power: 3x9W (600mA/36V)
Lamp: EPISTAR COB (CRI>80)
AC: 200-240V


Beam Angle	Model	Lumen	Finish	LED Colour	LED Driver
36°	DC22021.2_	2200lm	1 Matt White 2 Matt Black 3 Silver	1 3000K 2 4000K 3 5000K 4 2000K - 2800K Dim to warm 5 2700K 6 3000K-4000K-5000K	1 On and off 2 Triac dimmable
55°	DC22021.3_	2200lm			

DC22021

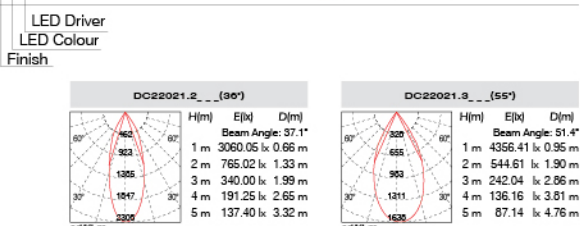

Led recessed down light for living rooms



NEW M . Art Surface mounted



Power: 4x9W (800mA/36V)
Lamp: EPISTAR COB (CRI>80)
AC: 200-240V

Beam Angle	Model	Lumen	Finish	LED Colour	LED Driver
36°	DC22028.2_	2800lm	1 Matt White 2 Matt Black 3 Silver	1 3000K 2 4000K 3 5000K 4 2000K - 2800K Dim to warm 5 2700K 6 3000K-4000K-5000K	1 On and off 2 Triac dimmable
55°	DC22028.3_	2800lm			



DC22028

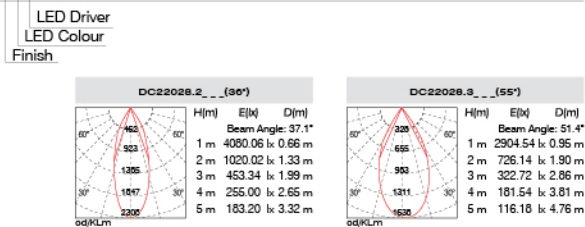

Power: 13W (300mA/36V)
Lamp: Bridgelux COB (CRI>80)
AC: 200-240V

Beam Angle	Model	Lumen	Finish	LED Colour	LED Driver
36°	DC22133.2_	1100lm	1 Matt White 2 Matt Black 3 Silver	1 3000K 2 4000K 3 5000K 4 2000K - 2800K Dim to warm 5 2700K 6 3000K-4000K-5000K	1 On and off 2 Triac dimmable
55°	DC22133.3_	1100lm			


DC22133

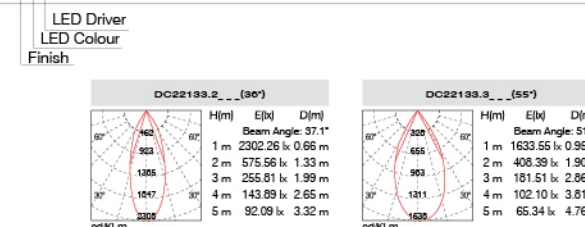

Power: 2x13W (600mA/36V)
Lamp: Bridgelux COB (CRI>80)
AC: 200-240V

Beam Angle	Model	Lumen	Finish	LED Colour	LED Driver
36°	DC22026.2_	2300lm	1 Matt White 2 Matt Black 3 Silver	1 3000K 2 4000K 3 5000K 4 2000K - 2800K Dim to warm 5 2700K 6 3000K-4000K-5000K	1 On and off 2 Triac dimmable
55°	DC22026.3_	2300lm			

DC22026

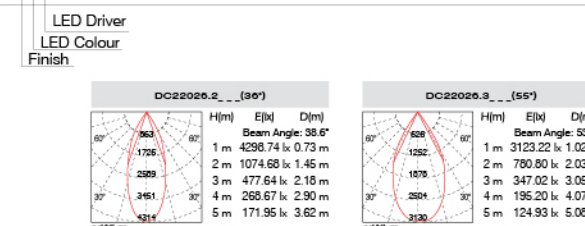


M . Art Surface mounted

NEW Led recessed down light for living rooms




DC22039




Power: 3*13W (900mA /36V)
Lamp: Bridgelux COB (CRI>80)
AC: 200-240V

Beam Angle	Model	Lumen	Finish	LED Colour	LED Driver
36°	DC22039.2_---	3400lm	1 Matt White 2 Matt Black 3 Silver	1 3000K 2 4000K 3 5000K	1 On and off 2 Triac dimmable
55°	DC22039.3_---	3400lm		4 2000K - 2800K Dim to warm 5 2700K 6 3000K-4000K-5000K	

LED Driver
LED Colour
Finish

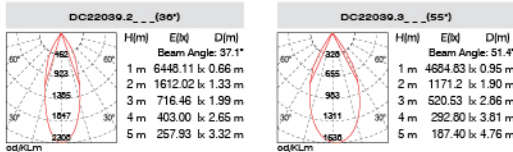



DC22052



Power: 4*13W (1200mA /36V)
Lamp: Bridgelux COB (CRI>80)
AC: 200-240V

Beam Angle	Model	Lumen	Finish	LED Colour	LED Driver
36°	DC22052.2_---	4400lm	1 Matt White 2 Matt Black 3 Silver	1 3000K 2 4000K 3 5000K	1 On and off 2 Triac dimmable
55°	DC22052.3_---	4400lm		4 2000K - 2800K Dim to warm 5 2700K 6 3000K-4000K-5000K	

LED Driver
LED Colour
Finish

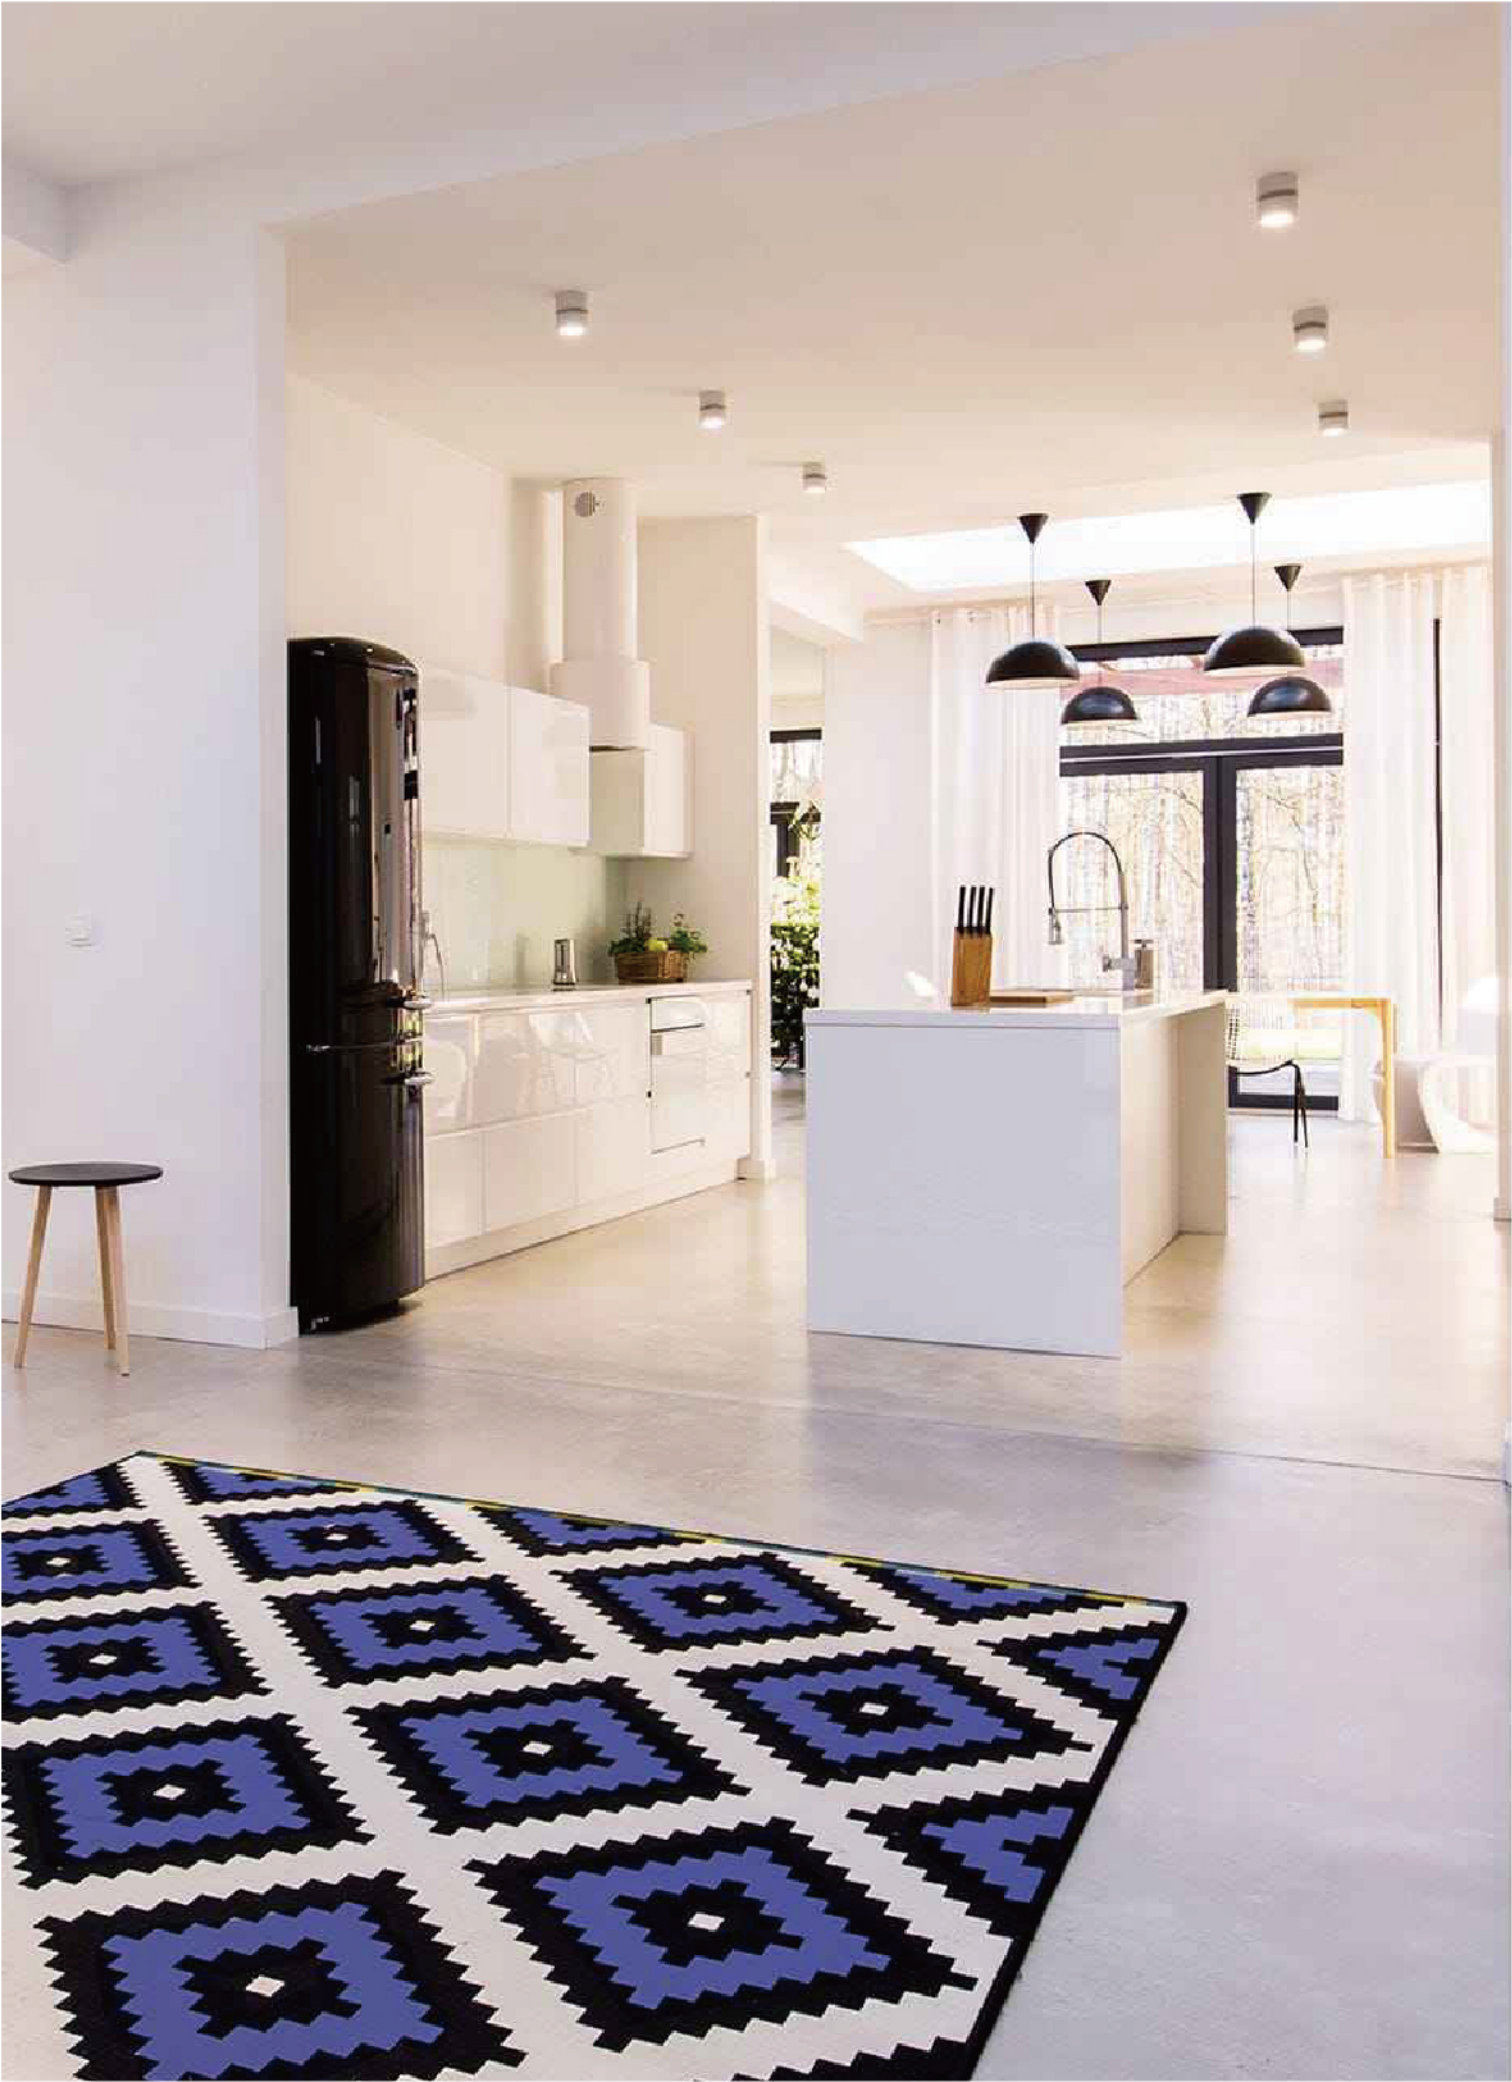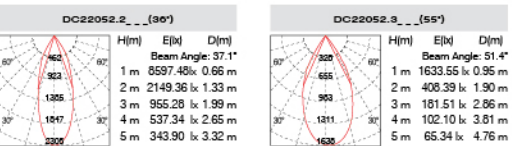

Features


- 1. High efficient, energy saving, eco-friendly downlight, with latest genuine imported COB, perfectly restores the original vivid colour. Improved appearance, creates a comfortable atmosphere. Long lifespan up to 50,000 hours.
- 2. specially designed optical system, with elevated protective diffuser, produces precise, highly efficient, natural and soft light output.
- 3. System lumen output up to 100lm/W.
- 4. Free switch between coverable and non-coverable with insulation material, simply by adding or removing a portable cap at the top of heatsink.
- 5. Compatible to RT2020 standard air-tightness. IP65 for whole lamp.
- 6. With simple and compact structure, in aerodynamics design, the heatsink made from good aluminum alloy, creates better thermal performance.
- 7. Different CCT optional, for various space needs.

Application

House, lounge.



High lumen	100lm/W	50000	50000hrs	Coverable by insulation material	RT 2020	RT2020
IP20 IP65	IP Level	Air seal	Air seal	Dimmable	More CCT	More CCT

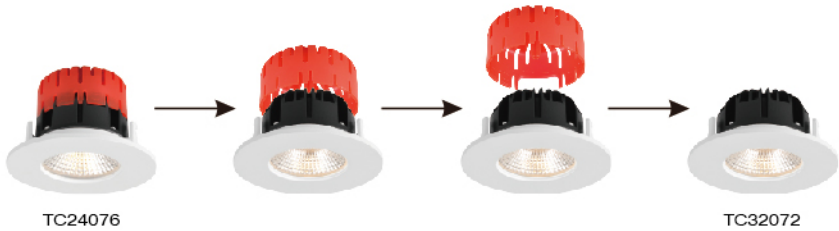

TC24076 7W(660lm) 68mm	TC24075 7W(660lm) 68mm	TC24078 7W(660lm) 68mm	TC24077 7W(660lm) 68mm
TC32072 7W(660lm) 68mm	TC32071 7W(660lm) 68mm	TC32074 7W(660lm) 68mm	TC32073 7W(660lm) 68mm




CE

SAA

RoHS

IP65

ERP



53
Ø85
68mm

Power: 7W (150mA/36V)
Lamp: EPISTAR COB (CRI>80)
AC: 200-240V

Beam Angle	Model	Lumen	Finish	LED Colour	LED Driver
36°	TC24076.2_ _ _	660lm	1 Matt White 2 Matt Black 3 Silver	1 3000K 2 4000K 3 5000K	1 On and off 2 Triac dimmable 3 1~10V dimmable
55°	TC24076.3_ _ _	660lm		4 2000K - 2800K Dim to warm 5 2700K	4 Dali 5 Bluetooth

LED Driver
LED Colour
Finish




CE

SAA

RoHS

IP65

ERP




42
Ø85
68mm

Power: 7W (150mA/36V)
Lamp: EPISTAR COB (CRI>80)
AC: 200-240V

Beam Angle	Model	Lumen	Finish	LED Colour	LED Driver
36°	TC32072.2_ _ _	660lm	1 Matt White 2 Matt Black 3 Silver	1 3000K 2 4000K 3 5000K	1 On and off 2 Triac dimmable 3 1~10V dimmable
55°	TC32072.3_ _ _	660lm		4 2000K - 2800K Dim to warm 5 2700K	4 Dali 5 Bluetooth

LED Driver
LED Colour
Finish

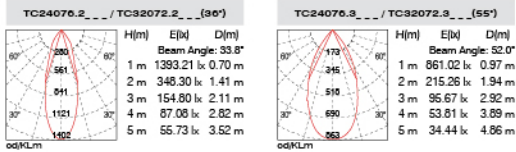




CE

SAA

RoHS

IP65

ERP




53
Ø85
±15°
68mm

Power: 7W (150mA/36V)
Lamp: EPISTAR COB (CRI>80)
AC: 200-240V

Beam Angle	Model	Lumen	Finish	LED Colour	LED Driver
36°	TC24075.2_ _ _	660lm	1 Matt White 2 Matt Black 3 Silver	1 3000K 2 4000K 3 5000K	1 On and off 2 Triac dimmable 3 1~10V dimmable
55°	TC24075.3_ _ _	660lm		4 2000K - 2800K Dim to warm 5 2700K	4 Dali 5 Bluetooth

LED Driver
LED Colour
Finish

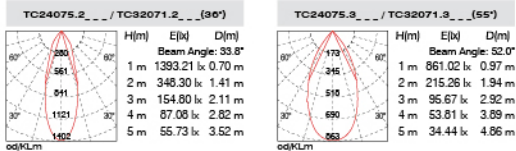

TC32071




CE

SAA

RoHS

IP65

ERP



53
85 x 85
68mm

Power: 7W (150mA/36V)
Lamp: EPISTAR COB (CRI>80)
AC: 200-240V

Beam Angle	Model	Lumen	Finish	LED Colour	LED Driver
36°	TC24078.2_ _ _	660lm	1 Matt White 2 Matt Black 3 Silver	1 3000K 2 4000K 3 5000K	1 On and off 2 Triac dimmable 3 1~10V dimmable
55°	TC24078.3_ _ _	660lm		4 2000K - 2800K Dim to warm 5 2700K	4 Dali 5 Bluetooth

LED Driver
LED Colour
Finish




CE

SAA

RoHS

IP65

ERP




42
85 x 85
68mm

Power: 7W (150mA/36V)
Lamp: EPISTAR COB (CRI>80)
AC: 200-240V

Beam Angle	Model	Lumen	Finish	LED Colour	LED Driver
36°	TC32074.2_ _ _	660lm	1 Matt White 2 Matt Black 3 Silver	1 3000K 2 4000K 3 5000K	1 On and off 2 Triac dimmable 3 1~10V dimmable
55°	TC32074.3_ _ _	660lm		4 2000K - 2800K Dim to warm 5 2700K	4 Dali 5 Bluetooth

LED Driver
LED Colour
Finish

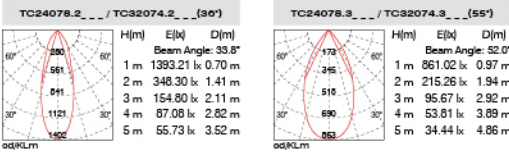




CE

SAA

RoHS

IP65

ERP



53
85 x 85
±15°
68mm

Power: 7W (150mA/36V)
Lamp: EPISTAR COB (CRI>80)
AC: 200-240V

Beam Angle	Model	Lumen	Finish	LED Colour	LED Driver
36°	TC24077.2_ _ _	660lm	1 Matt White 2 Matt Black 3 Silver	1 3000K 2 4000K 3 5000K	1 On and off 2 Triac dimmable 3 1~10V dimmable
55°	TC24077.3_ _ _	660lm		4 2000K - 2800K Dim to warm 5 2700K	4 Dali 5 Bluetooth

LED Driver
LED Colour
Finish




CE

SAA

RoHS

IP65

ERP




42
85 x 85
±15°
68mm

Power: 7W (150mA/36V)
Lamp: EPISTAR COB (CRI>80)
AC: 200-240V


Beam Angle	Model	Lumen	Finish	LED Colour	LED Driver
36°	TC32073.2_ _ _	660lm	1 Matt White 2 Matt Black 3 Silver	1 3000K 2 4000K 3 5000K	1 On and off 2 Triac dimmable 3 1~10V dimmable
55°	TC32073.3_ _ _	660lm		4 2000K - 2800K Dim to warm 5 2700K	4 Dali 5 Bluetooth

LED Driver
LED Colour
Finish

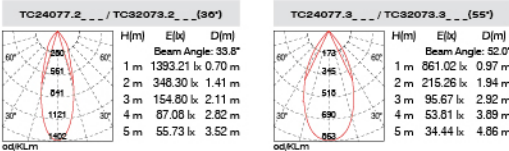





TC9410




Power: 12W (260mA/36V)
Lamp: Bridgelux COB (CRI>80)
AC: 200-240V

Beam Angle	Model	Lumen	Finish	LED Colour	LED Driver
36°	TC9410.2_---	1200lm	1 Matt White 2 Matt Black 3 Silver	1 3000K 2 4000K 3 5000K	1 On and off 2 Triac dimmable 3 1~10V dimmable
55°	TC9410.3_---	1200lm		4 2000K - 2800K Dim to warm 5 2700K	4 Dali 5 Bluetooth

LED Driver
LED Colour
Finish






TC95102



Power: 12W (260mA/36V)
Lamp: Bridgelux COB (CRI>80)
AC: 200-240V

Beam Angle	Model	Lumen	Finish	LED Colour	LED Driver
24°	TC95102.1_---	1000lm	1 Matt White 2 Matt Black 3 Silver	1 3000K 2 4000K 3 5000K	1 On and off 2 Triac dimmable 3 1~10V dimmable
36°	TC95102.2_---	1000lm		4 2000K - 2800K Dim to warm 5 2700K	4 Dali 5 Bluetooth

LED Driver
LED Colour
Finish



Features

- 1. High efficient, energy saving, eco-friendly downlight, with latest genuine imported COB, perfectly restores the original vivid colour. Improved appearance, creates a comfortable atmosphere. Long lifespan up to 50,000 hours.
- 2. Specially designed optical system, with high transmissive protective diffuser, produces precise, highly efficient, natural and soft light output.
- 3. System lumen output up to 100lm/W.
- 4. Free switch to coverable and non-coverable with insulation material, simply by adding or removing a portable cap at the top of heatsink.
- 5. Compatible to RT2020 standard air-tightness. IP65 for whole fixture.
- 6. With simple and compact structure, in aerodynamics design, the heatsink made from good aluminum alloy, creates better thermal performance.
- 7. Different CCT optional, for various space needs.

Application

House, lounge.



High lumen	100lm/W	50000	50000hrs	Air seal	RT 2020	RT2020
IP65	IP Level	Dimmable		More CCT		



TC24072 7W(660lm) 68mm	TC24071 7W(660lm) 68mm	TC24074 7W(660lm) 68mm	TC24073 7W(660lm) 68mm
-------------------------------------	-------------------------------------	-------------------------------------	-------------------------------------

IP65 Ingress Protection


water proof lock	water proof silicon seal	Protection at front	Protection at back
-------------------------	---------------------------------	----------------------------	---------------------------

Aqua IP65

Led recessed down light for living rooms




TC24072

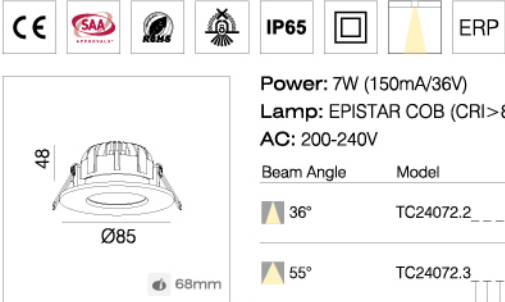


Power: 7W (150mA/36V)
Lamp: EPISTAR COB (CRI>80)
AC: 200-240V

Beam Angle	Model	Lumen	Finish	LED Colour	LED Driver
36°	TC24072.2	660lm	1 Matt White 2 Matt Black 3 Silver	1 3000K 2 4000K 3 5000K	1 On and off 2 Triac dimmable 3 1~10V dimmable
55°	TC24072.3	660lm		4 2000K - 2800K Dim to warm 5 2700K	4 Dali 5 Bluetooth

LED Driver
LED Colour
Finish

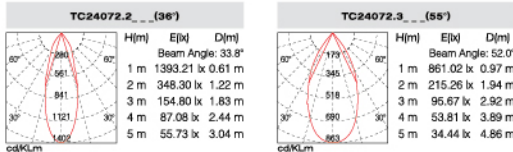


TC24071

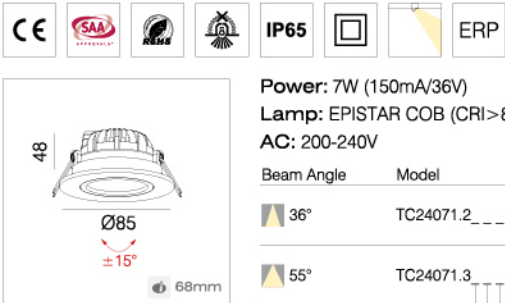


Power: 7W (150mA/36V)
Lamp: EPISTAR COB (CRI>80)
AC: 200-240V

Beam Angle	Model	Lumen	Finish	LED Colour	LED Driver
36°	TC24071.2	660lm	1 Matt White 2 Matt Black 3 Silver	1 3000K 2 4000K 3 5000K	1 On and off 2 Triac dimmable 3 1~10V dimmable
55°	TC24071.3	660lm		4 2000K - 2800K Dim to warm 5 2700K	4 Dali 5 Bluetooth

LED Driver
LED Colour
Finish

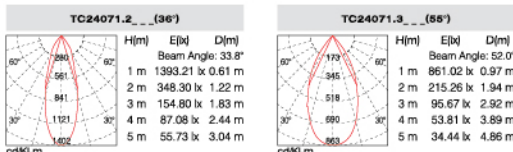


TC24074

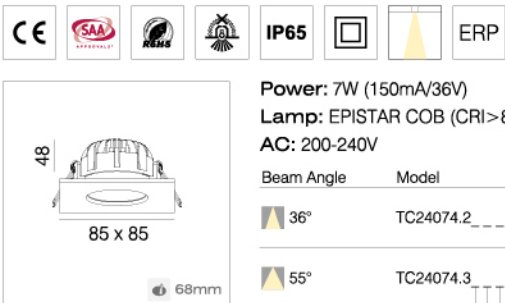

Power: 7W (150mA/36V)
Lamp: EPISTAR COB (CRI>80)
AC: 200-240V

Beam Angle	Model	Lumen	Finish	LED Colour	LED Driver
36°	TC24074.2	660lm	1 Matt White 2 Matt Black 3 Silver	1 3000K 2 4000K 3 5000K	1 On and off 2 Triac dimmable 3 1~10V dimmable
55°	TC24074.3	660lm		4 2000K - 2800K Dim to warm 5 2700K	4 Dali 5 Bluetooth

LED Driver
LED Colour
Finish

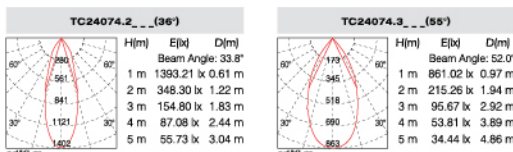


Aqua IP65

Led recessed down light for living rooms




TC24073

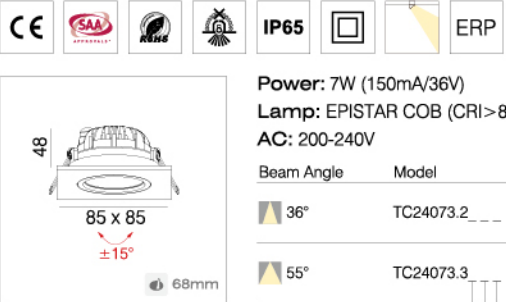

Power: 7W (150mA/36V)
Lamp: EPISTAR COB (CRI>80)
AC: 200-240V

Beam Angle	Model	Lumen	Finish	LED Colour	LED Driver
36°	TC24073.2	660lm	1 Matt White 2 Matt Black 3 Silver	1 3000K 2 4000K 3 5000K	1 On and off 2 Triac dimmable 3 1~10V dimmable
55°	TC24073.3	660lm		4 2000K - 2800K Dim to warm 5 2700K	4 Dali 5 Bluetooth

LED Driver
LED Colour
Finish

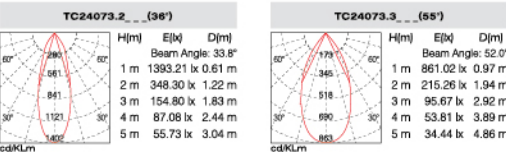



AQUA IP65


Aesthetically pleasing steel frame design,
Which belies both its structural robustness and versatility.

Led recessed down light for living rooms

Aqua IP65




TC9110




Power: 12W (260mA/36V)
Lamp: Bridgelux COB (CRI>80)
AC: 200-240V

Beam Angle	Model	Lumen	Finish	LED Colour	LED Driver
45°	TC9110.2_	1200lm	1 Matt White 2 Matt Black 3 Silver	1 3000K 2 4000K 3 5000K	1 On and off 2 Triac dimmable 3 1~10V dimmable
55°	TC9110.3	1200lm		4 2000K - 2800K Dim to warm 5 2700K	4 Dali 5 Bluetooth

LED Driver
LED Colour
Finish

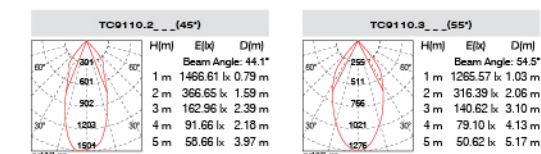


TC9515



Power: 15W (350mA/36V)
Lamp: Bridgelux COB (CRI>80)
AC: 200-240V

Beam Angle	Model	Lumen	Finish	LED Colour	LED Driver
45°	TC9515.2_	1400lm	1 Matt White 2 Matt Black 3 Silver	1 3000K 2 4000K 3 5000K	1 On and off 2 Triac dimmable 3 1~10V dimmable
55°	TC9515.3	1400lm		4 2000K - 2800K Dim to warm 5 2700K	4 Dali 5 Bluetooth

LED Driver
LED Colour
Finish

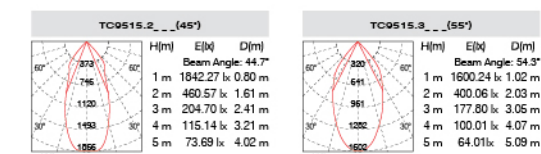

Features

- 1. Efficient, long lifespan, energy saving with latest genuine imported COB.
- 2. Die-casting heat sink of advanced design, made from high grade aluminum alloy, guarantees for a longer lifespan.
- 3. Round and square front combination by your wish, various cutout diameters from 50 to 83mm. Protective PMMA diffuser at front, easier for maintenance and cleaning.
- 4. Curved light outlet, for a better anti-glare performance while keeping an elegant design.
- 5. IP44 protection is applicable to a special place.
- 6. Easier installation with springs at both sides.

Application

House, lounge, museum and gallery etc.



High lumen

90lm/W

50000

50000hrs

More watt (4.5-27W)

More sizes

IP20

IP Level

IP44

Dimmable

More CCT



TC11035
4.5W(330lm)
50mm

TC11055
6W(420lm)
50mm

TC21035
4.5W(330lm)
58mm

TC21055
6W(420lm)
58mm

TC12035
4.5W(330lm)
50mm

TC12055
6W(420lm)
50mm

TC22035
4.5W(330lm)
58mm

TC22055
6W(420lm)
58mm

TC27052
6W(600lm)
73mm

TC27072
9W(890lm)
73mm

TC89054
6W(580lm)
79mm

TC89074
9W(740lm)
79mm


TC66073
9W(800lm)
83mm

DG3414
2x9W(1390lm)
175x83mm

DG3421
3x9W(2000lm)
275x83mm




TC11035

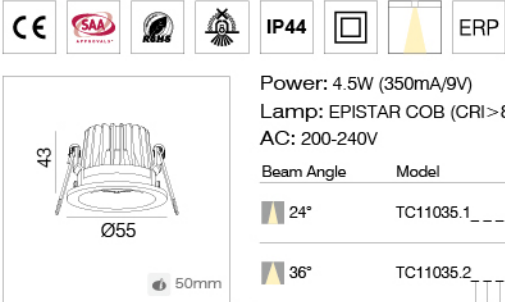


Power: 4.5W (350mA/9V)
Lamp: EPISTAR COB (CRI>80)
AC: 200-240V

Beam Angle	Model	Lumen	Finish	LED Colour	LED Driver
24°	TC11035.1_ _ _	330lm	1 Matt White 2 Matt Black 3 Silver	1 3000K 2 4000K 3 5000K 5 2700K	1 On and off 2 Triac dimmable 3 1~10V dimmable 4 Dali 5 Bluetooth
36°	TC11035.2_ _ _	330lm			

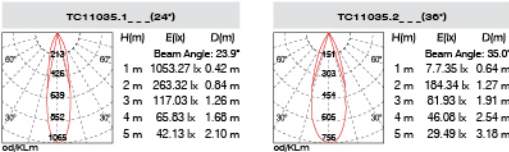


TC11055

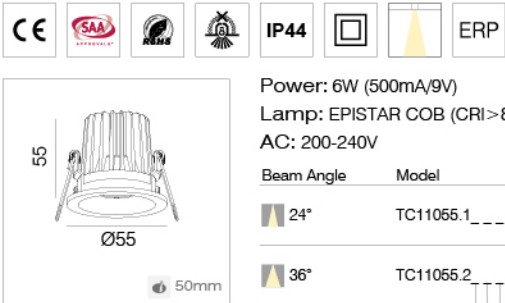


Power: 6W (500mA/9V)
Lamp: EPISTAR COB (CRI>80)
AC: 200-240V

Beam Angle	Model	Lumen	Finish	LED Colour	LED Driver
24°	TC11055.1_ _ _	420lm	1 Matt White 2 Matt Black 3 Silver	1 3000K 2 4000K 3 5000K 5 2700K	1 On and off 2 Triac dimmable 3 1~10V dimmable 4 Dali 5 Bluetooth
36°	TC11055.2_ _ _	420lm			

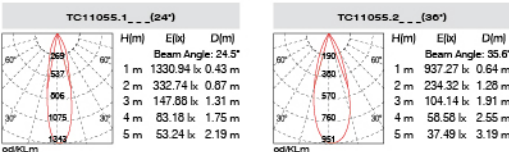


TC21035

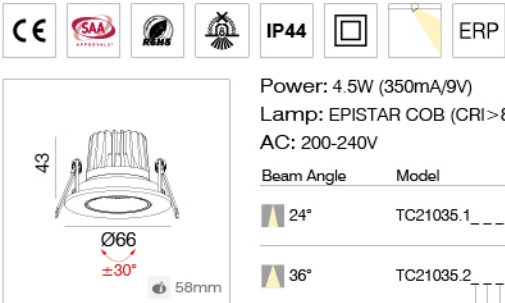


Power: 4.5W (350mA/9V)
Lamp: EPISTAR COB (CRI>80)
AC: 200-240V

Beam Angle	Model	Lumen	Finish	LED Colour	LED Driver
24°	TC21035.1_ _ _	330lm	1 Matt White 2 Matt Black 3 Silver	1 3000K 2 4000K 3 5000K 5 2700K	1 On and off 2 Triac dimmable 3 1~10V dimmable 4 Dali 5 Bluetooth
36°	TC21035.2_ _ _	330lm			

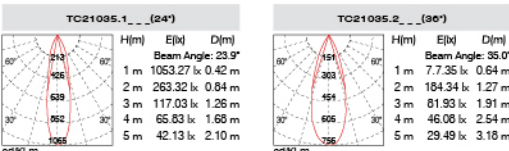


TC21055

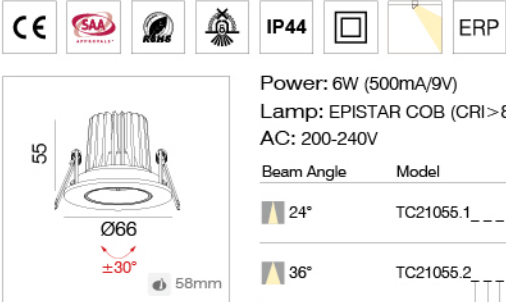


Power: 6W (500mA/9V)
Lamp: EPISTAR COB (CRI>80)
AC: 200-240V

Beam Angle	Model	Lumen	Finish	LED Colour	LED Driver
24°	TC21055.1_ _ _	420lm	1 Matt White 2 Matt Black 3 Silver	1 3000K 2 4000K 3 5000K 5 2700K	1 On and off 2 Triac dimmable 3 1~10V dimmable 4 Dali 5 Bluetooth
36°	TC21055.2_ _ _	420lm			

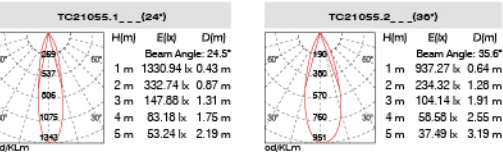


TC12035

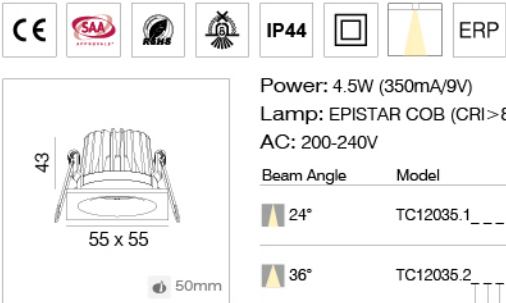


Power: 4.5W (350mA/9V)
Lamp: EPISTAR COB (CRI>80)
AC: 200-240V

Beam Angle	Model	Lumen	Finish	LED Colour	LED Driver
24°	TC12035.1_ _ _	330lm	1 Matt White 2 Matt Black 3 Silver	1 3000K 2 4000K 3 5000K 5 2700K	1 On and off 2 Triac dimmable 3 1~10V dimmable 4 Dali 5 Bluetooth
36°	TC12035.2_ _ _	330lm			

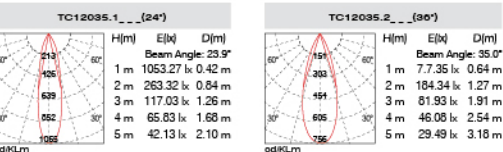


TC12055

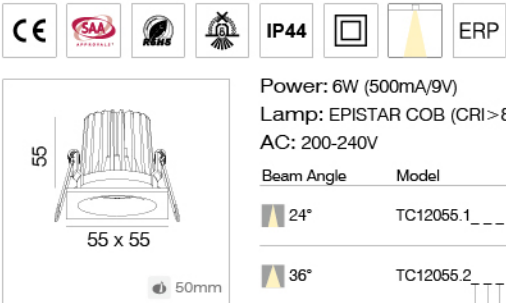


Power: 6W (500mA/9V)
Lamp: EPISTAR COB (CRI>80)
AC: 200-240V

Beam Angle	Model	Lumen	Finish	LED Colour	LED Driver
24°	TC12055.1_ _ _	420lm	1 Matt White 2 Matt Black 3 Silver	1 3000K 2 4000K 3 5000K 5 2700K	1 On and off 2 Triac dimmable 3 1~10V dimmable 4 Dali 5 Bluetooth
36°	TC12055.2_ _ _	420lm			

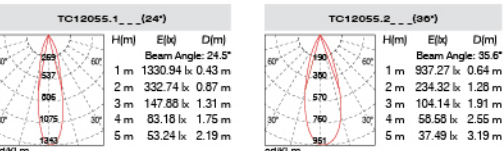




TC22035

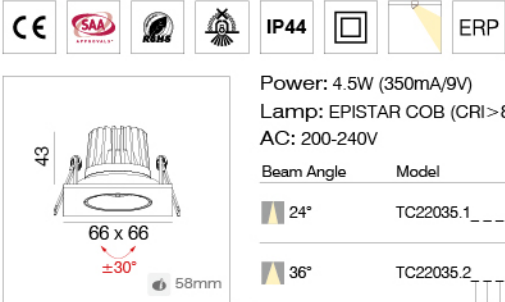


Power: 4.5W (350mA/9V)
Lamp: EPISTAR COB (CRI>80)
AC: 200-240V

Beam Angle	Model	Lumen	Finish	LED Colour	LED Driver
24°	TC22035.1_	330lm	1 Matt White 2 Matt Black 3 Silver	1 3000K 2 4000K 3 5000K	1 On and off 2 Triac dimmable 3 1~10V dimmable
36°	TC22035.2_	330lm		5 2700K	4 Dali 5 Bluetooth

LED Driver
LED Colour
Finish

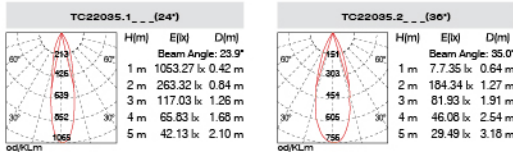


TC22055

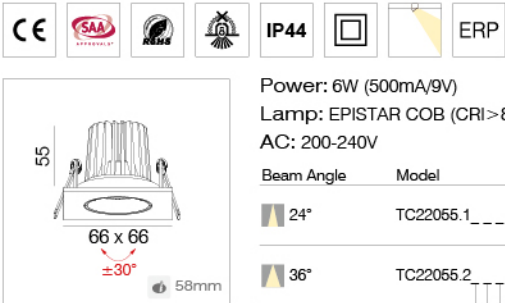


Power: 6W (500mA/9V)
Lamp: EPISTAR COB (CRI>80)
AC: 200-240V

Beam Angle	Model	Lumen	Finish	LED Colour	LED Driver
24°	TC22055.1_	420lm	1 Matt White 2 Matt Black 3 Silver	1 3000K 2 4000K 3 5000K	1 On and off 2 Triac dimmable 3 1~10V dimmable
36°	TC22055.2_	420lm		5 2700K	4 Dali 5 Bluetooth

LED Driver
LED Colour
Finish

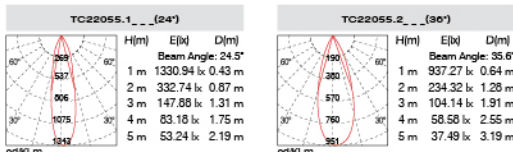


TC27052

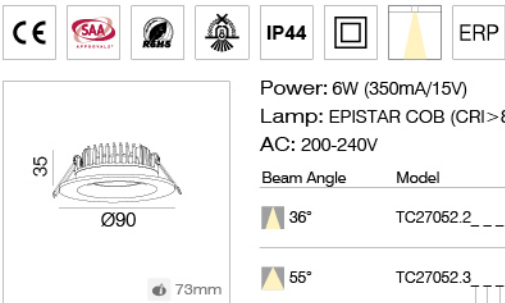


Power: 6W (350mA/15V)
Lamp: EPISTAR COB (CRI>80)
AC: 200-240V

Beam Angle	Model	Lumen	Finish	LED Colour	LED Driver
36°	TC27052.2_	600lm	1 Matt White 2 Matt Black 3 Silver	1 3000K 2 4000K 3 5000K	1 On and off 2 Triac dimmable 3 1~10V dimmable
55°	TC27052.3_	600lm		4 2000K - 2800K Dim to warm 5 2700K	4 Dali 5 Bluetooth

LED Driver
LED Colour
Finish

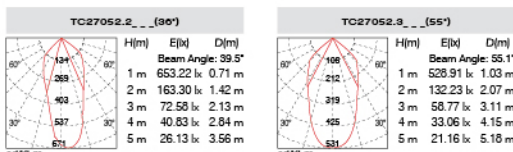


TC27072

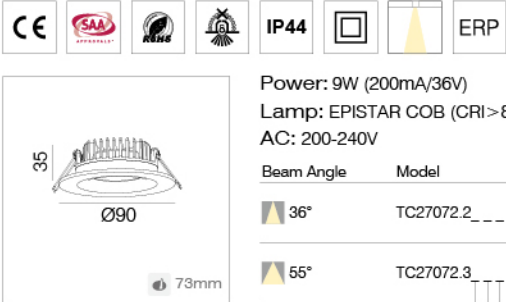


Power: 9W (200mA/36V)
Lamp: EPISTAR COB (CRI>80)
AC: 200-240V

Beam Angle	Model	Lumen	Finish	LED Colour	LED Driver
36°	TC27072.2_	890lm	1 Matt White 2 Matt Black 3 Silver	1 3000K 2 4000K 3 5000K	1 On and off 2 Triac dimmable 3 1~10V dimmable
55°	TC27072.3_	890lm		4 2000K - 2800K Dim to warm 5 2700K	4 Dali 5 Bluetooth

LED Driver
LED Colour
Finish

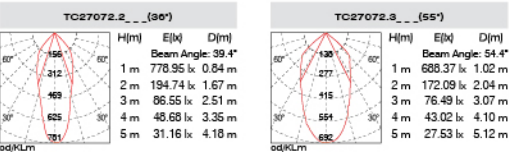


TC89054

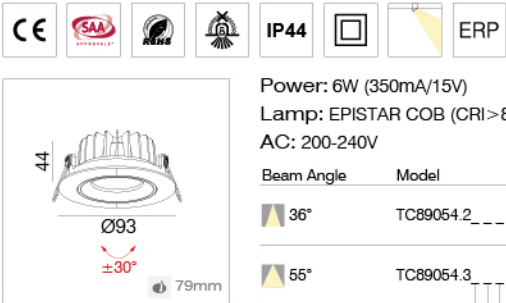


Power: 6W (350mA/15V)
Lamp: EPISTAR COB (CRI>80)
AC: 200-240V

Beam Angle	Model	Lumen	Finish	LED Colour	LED Driver
36°	TC89054.2_	580lm	1 Matt White 2 Matt Black 3 Silver	1 3000K 2 4000K 3 5000K	1 On and off 2 Triac dimmable 3 1~10V dimmable
55°	TC89054.3_	580lm		4 2000K - 2800K Dim to warm 5 2700K	4 Dali 5 Bluetooth

LED Driver
LED Colour
Finish

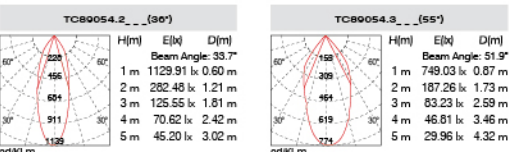


TC89074

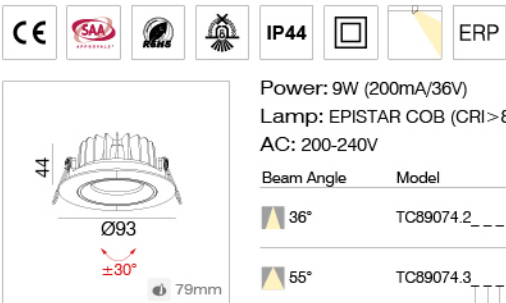

Power: 9W (200mA/36V)
Lamp: EPISTAR COB (CRI>80)
AC: 200-240V

Beam Angle	Model	Lumen	Finish	LED Colour	LED Driver
36°	TC89074.2_	740lm	1 Matt White 2 Matt Black 3 Silver	1 3000K 2 4000K 3 5000K	1 On and off 2 Triac dimmable 3 1~10V dimmable
55°	TC89074.3_	740lm		4 2000K - 2800K Dim to warm 5 2700K	4 Dali 5 Bluetooth

LED Driver
LED Colour
Finish

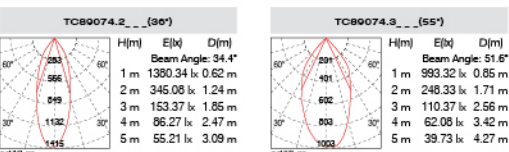


Moon

Led recessed down light for living rooms





TC66073




Power: 9W (200mA/36V)
Lamp: EPISTAR COB (CRI>80)
AC: 200-240V

Beam Angle	Model	Lumen	Finish	LED Colour	LED Driver
36°	TC66073.2_---	800lm	1 Matt White 2 Matt Black 3 Silver	1 3000K 2 4000K 3 5000K	1 On and off 2 Triac dimmable 3 1~10V dimmable
55°	TC66073.3_---	800lm		4 2000K - 2800K Dim to warm 5 2700K	4 Dali 5 Bluetooth

LED Driver
LED Colour
Finish





DG3414




Power: 2x9W (350mA/36V)
Lamp: EPISTAR COB (CRI>80)
AC: 200-240V

Beam Angle	Model	Lumen	Finish	LED Colour	LED Driver
36°	DG3414.2_---	1390lm	1 Matt White 2 Matt Black 3 Silver	1 3000K 2 4000K 3 5000K	1 On and off 2 Triac dimmable 3 1~10V dimmable
55°	DG3414.3_---	1390lm		4 2000K - 2800K Dim to warm 5 2700K	4 Dali 5 Bluetooth

LED Driver
LED Colour
Finish





DG3421



Power: 3x9W (500mA/36V)
Lamp: EPISTAR COB (CRI>80)
AC: 200-240V

Beam Angle	Model	Lumen	Finish	LED Colour	LED Driver
36°	DG3421.2_---	2000lm	1 Matt White 2 Matt Black 3 Silver	1 3000K 2 4000K 3 5000K	1 On and off 2 Triac dimmable 3 1~10V dimmable
55°	DG3421.3_---	2000lm		4 2000K - 2800K Dim to warm 5 2700K	4 Dali 5 Bluetooth

LED Driver
LED Colour
Finish



Features

- 1. With latest genuine imported COB, brand driver with imported IC, ensures the long life span, high efficient and energy-saving.
- 2. Die-casting heat sink made from high grade aluminum alloy, long lifespan guaranteed by advanced design of heat sink.
- 3. Customized colour available, with advanced powder coating technology, better vision and easier cleaning, protective PMMA diffuser at front, easier for maintenance and cleaning.
- 4. 350 degree rotation horizontally and 45 degree tilting vertically.
- 5. High reflecting vacuum electroplated reflector made from imported PC by precise injection.
- 6. Easier installation with springs at both sides.

Application

Places like museum and gallery etc.



High lumen

90lm/W

50000

50000hrs

More watt (6-40W)

Dimmable

350° horizontally

38°/50° vertically

More CCT



TC88078


CE

SAA

RoHS

IP44


ERP



Power: 6W (350mA/15V)
Lamp: EPISTAR COB (CRI>80)
AC: 200-240V

Beam Angle	Model	Lumen	Finish	LED Colour	LED Driver
36°	TC88078.2_ _ _	630lm	1 Matt White 2 Matt Black 3 Silver	1 3000K 2 4000K 3 5000K	1 On and off 2 Triac dimmable 3 1~10V dimmable
55°	TC88078.3_ _ _	630lm		4 2000K - 2800K Dim to warm 5 2700K	4 Dali 5 Bluetooth

LED Driver
LED Colour
Finish

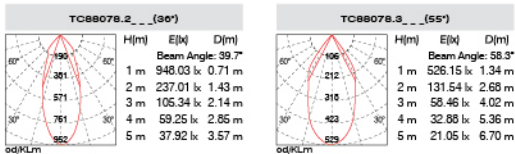

TC8809


CE

SAA

RoHS

IP44


ERP



Power: 12W (260mA/36V)
Lamp: Bridgelux COB (CRI>80)
AC: 200-240V

Beam Angle	Model	Lumen	Finish	LED Colour	LED Driver
36°	TC8809.2_ _ _	1120lm	1 Matt White 2 Matt Black 3 Silver	1 3000K 2 4000K 3 5000K	1 On and off 2 Triac dimmable 3 1~10V dimmable
50°	TC8809.3_ _ _	1120lm		4 2000K - 2800K Dim to warm 5 2700K	4 Dali 5 Bluetooth

LED Driver
LED Colour
Finish

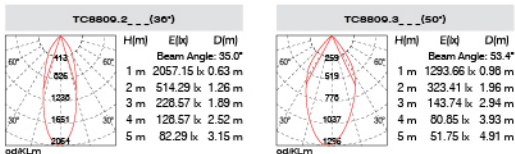

TC8815


CE

SAA

RoHS

IP44


ERP



Power: 15W (300mA/36V)
Lamp: Bridgelux COB (CRI>80)
AC: 200-240V

Beam Angle	Model	Lumen	Finish	LED Colour	LED Driver
36°	TC8815.2_ _ _	1400lm	1 Matt White 2 Matt Black 3 Silver	1 3000K 2 4000K 3 5000K	1 On and off 2 Triac dimmable 3 1~10V dimmable
50°	TC8815.3_ _ _	1400lm		4 2000K - 2800K Dim to warm 5 2700K	4 Dali 5 Bluetooth

LED Driver
LED Colour
Finish

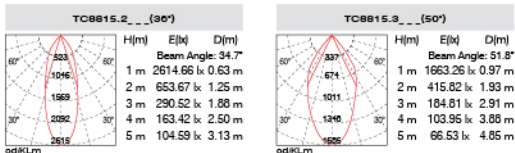


V-illumi

Led recessed down light for living rooms




DC2430




Power: 30W (700mA/36V)
Lamp: Bridgelux COB (CRI>80)
AC: 200-240V

Beam Angle	Model	Lumen	Finish	LED Colour	LED Driver
24°	DC2430.1_ _ _	2550lm	1 Matt White 2 Matt Black 3 Silver	1 3000K 2 4000K 3 5000K 4 2000K - 2800K Dim to warm 5 2700K	1 On and off 2 Triac dimmable 3 1~10V dimmable 4 Dali 5 Bluetooth
36°	DC2430.2_ _ _	2550lm			

LED Driver
LED Colour
Finish

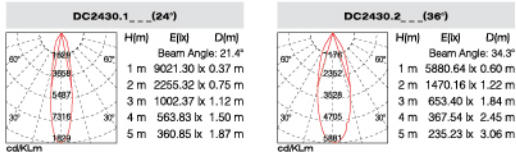


DC2440



Power: 40W (900mA/36V)
Lamp: Bridgelux COB (CRI>80)
AC: 200-240V

Beam Angle	Model	Lumen	Finish	LED Colour	LED Driver
24°	DC2440.1_ _ _	2900lm	1 Matt White 2 Matt Black 3 Silver	1 3000K 2 4000K 3 5000K 4 2000K - 2800K Dim to warm 5 2700K	1 On and off 2 Triac dimmable 3 1~10V dimmable 4 Dali 5 Bluetooth
36°	DC2440.2_ _ _	2900lm			

LED Driver
LED Colour
Finish

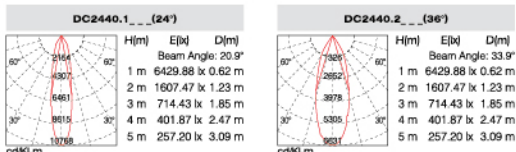

Features

- 1. Equipped with original packaging,high efficient, energy saving, environmental protection imported COB LED light source, displaying the color perfectly;Improving product quality, creating a comfortable and ambient lighting space, and having a service life of up to 50,000 hours;
- 2.Using unique optical design and high light transmission cover, with accurate light distribution, high light output, low glare, natural, soft and uniform light.
- 3. High-quality die-casting aluminum alloy material together with perfect aerodynamic design, make sure the best heat dissipation performance.
- 4. The shape is integrated with minimalist art design concept, compact and simple.
- 5. A variety of power options are available to meet the lighting requirement of different space.
- 6. Suitable for home ceiling.

Application

Home, office, shops, etc.



50000hrs

Dimmable

More sizes

More CCT




TC11036

Power: 3.5W (300mA/9V)
Lamp: EPISTAR COB (CRI>80)
AC: 200-240V

Beam Angle	Model	Lumen	Finish	LED Colour	LED Driver
60°	TC11036.3	300lm	1 Matt White 2 Matt Black 3 Silver	1 3000K 2 4000K 3 5000K 5 2700K	1 On and off 2 Triac dimmable

LED Driver
LED Colour
Finish




TC21036

Power: 3.5W (300mA/9V)
Lamp: EPISTAR COB (CRI>80)
AC: 200-240V

Beam Angle	Model	Lumen	Finish	LED Colour	LED Driver
60°	TC21036.3	300lm	1 Matt White 2 Matt Black 3 Silver	1 3000K 2 4000K 3 5000K 5 2700K	1 On and off 2 Triac dimmable

LED Driver
LED Colour
Finish




TC31031

Power: 3.5W (300mA/9V)
Lamp: EPISTAR COB (CRI>80)
AC: 200-240V

Beam Angle	Model	Lumen	Finish	LED Colour	LED Driver
60°	TC31031.3	300lm	1 Matt White 2 Matt Black 3 Silver	1 3000K 2 4000K 3 5000K 5 2700K	1 On and off 2 Triac dimmable

LED Driver
LED Colour
Finish




Mini Star

Led recessed down light for living rooms




TD1003

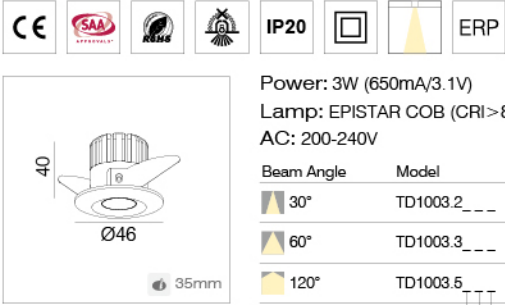


Power: 3W (650mA/3.1V)
Lamp: EPISTAR COB (CRI>80)
AC: 200-240V

Beam Angle	Model	Lumen	Finish	LED Colour	LED Driver
30°	TD1003.2_---	180lm	1 Matt White 2 Matt Black 3 Silver	1 3000K 2 4000K 3 5000K 5 2700K	1 On and off 2 Triac dimmable
60°	TD1003.3_---	180lm			
120°	TD1003.5_---	180lm			

LED Driver
LED Colour
Finish

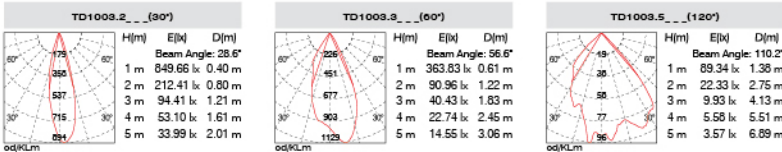


TD3003

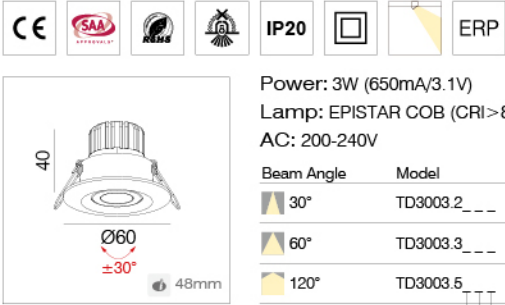


Power: 3W (650mA/3.1V)
Lamp: EPISTAR COB (CRI>80)
AC: 200-240V

Beam Angle	Model	Lumen	Finish	LED Colour	LED Driver
30°	TD3003.2_---	180lm	1 Matt White 2 Matt Black 3 Silver	1 3000K 2 4000K 3 5000K 5 2700K	1 On and off 2 Triac dimmable
60°	TD3003.3_---	180lm			
120°	TD3003.5_---	180lm			

LED Driver
LED Colour
Finish

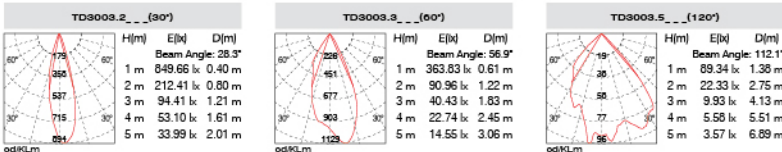


TD6003

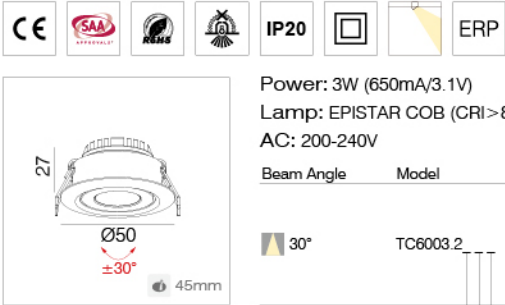

Power: 3W (650mA/3.1V)
Lamp: EPISTAR COB (CRI>80)
AC: 200-240V

Beam Angle	Model	Lumen	Finish	LED Colour	LED Driver
30°	TD6003.2_---	180lm	1 Matt White 2 Matt Black 3 Silver	1 3000K 2 4000K 3 5000K 5 2700K	1 On and off 2 Triac dimmable

LED Driver
LED Colour
Finish



Features

- 1. Imported COB/LED light source, the original factory package, high CRI, high efficient, high illumination,energy saving and environmental protection, create a comfortable atmosphere of lighting, long lifespan up to 50,000 hours.
- 2. Self-designed special optics, precise light distribution and high lumen output, anti-glare, soft and tender light, with frosted protective cover.
- 3. Excellent design with simple and graceful shape, adopt the high-quality aluminum alloy as die-casting material, good heat dissipation design by front and rear double ventilation.
- 4. Various power options for different lighting requirements.

Application

Shopping mall, hotel, exhibition hall, museum, etc.





50000hrs



More watt
(1.5-6W)



More sizes



More CCT



Dimmable










Power: 4.5W (350mA/9V)
Lamp: EPISTAR COB (CRI>80)
AC: 200-240V

Beam Angle	Model	Lumen	Finish	LED Colour	LED Driver
90°	TC20033.4	290lm	1 Matt White	1 3000K	1 On and off
			2 Matt Black	2 4000K	2 Triac dimmable
			3 Silver	3 5000K	
			4 2700K		
			5 2700K		

LED Driver

LED Colour


Finish



TC20033








Power: 4.5W (350mA/9V)
Lamp: EPISTAR COB (CRI>80)
AC: 200-240V

Beam Angle	Model	Lumen	Finish	LED Colour	LED Driver
90°	TC20035.4	290lm	1 Matt White	1 3000K	1 On and off
			2 Matt Black	2 4000K	2 Triac dimmable
			3 Silver	3 5000K	
			4 2700K		
			5 2700K		

LED Driver

LED Colour


Finish



TC20035








Power: 4.5W (350mA/9V)
Lamp: EPISTAR COB (CRI>80)
AC: 200-240V

Beam Angle	Model	Lumen	Finish	LED Colour	LED Driver
90°	TC20038.4	290lm	1 Matt White	1 3000K	1 On and off
			2 Matt Black	2 4000K	2 Triac dimmable
			3 Silver	3 5000K	
			4 2700K		
			5 2700K		

LED Driver

LED Colour

Finish




TC20038

Laura Cabinet

Led recessed down light for living rooms




TD10033

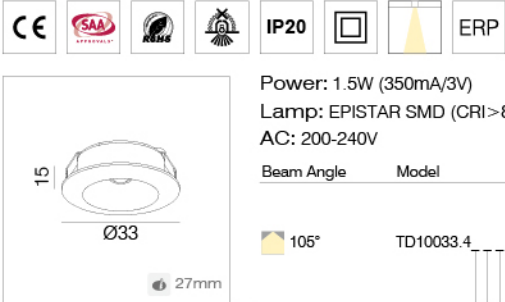


Power: 1.5W (350mA/3V)
Lamp: EPISTAR SMD (CRI>80)
AC: 200-240V

Beam Angle	Model	Lumen	Finish	LED Colour	LED Driver
105°	TD10033.4	71lm	1 Matt White	1 3000K	1 On and off
			2 Matt Black	2 4000K	2 Triac dimmable
			3 Silver	3 5000K	
			4 2700K		
			5 2700K		

LED Driver
LED Colour
Finish




TD2003

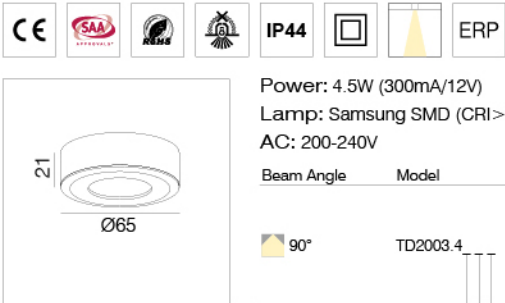


Power: 4.5W (300mA/12V)
Lamp: Samsung SMD (CRI>80)
AC: 200-240V

Beam Angle	Model	Lumen	Finish	LED Colour	LED Driver
90°	TD2003.4	280lm	1 Matt White	1 3000K	1 On and off
			2 Matt Black	2 4000K	2 Triac dimmable
			3 Silver	3 5000K	
			4 2700K		
			5 2700K		

LED Driver
LED Colour
Finish




TD2103

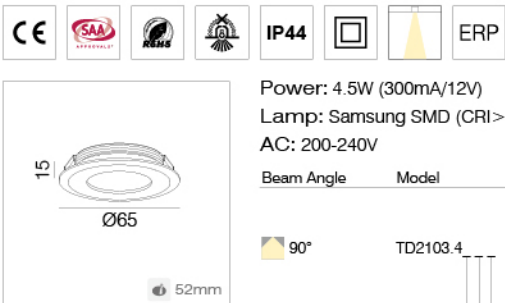

Power: 4.5W (300mA/12V)
Lamp: Samsung SMD (CRI>80)
AC: 200-240V

Beam Angle	Model	Lumen	Finish	LED Colour	LED Driver
90°	TD2103.4	280lm	1 Matt White	1 3000K	1 On and off
			2 Matt Black	2 4000K	2 Triac dimmable
			3 Silver	3 5000K	
			4 2700K		
			5 2700K		

LED Driver
LED Colour
Finish




Led recessed down light for living rooms

Laura Cabinet




TD1002

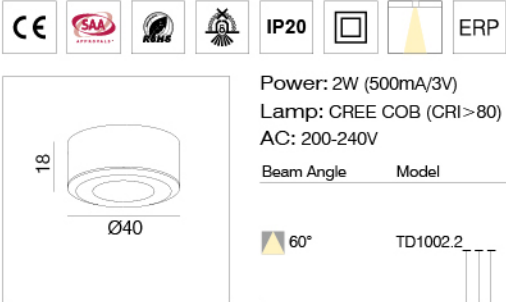


Power: 2W (500mA/3V)
Lamp: CREE COB (CRI>80)
AC: 200-240V

Beam Angle	Model	Lumen	Finish	LED Colour	LED Driver
60°	TD1002.2	80lm	1 Matt White	1 3000K	1 On and off
			2 Matt Black	2 4000K	2 Triac dimmable
			3 Silver	3 5000K	
			4 2700K		
			5 2700K		

LED Driver
LED Colour
Finish




TD1102

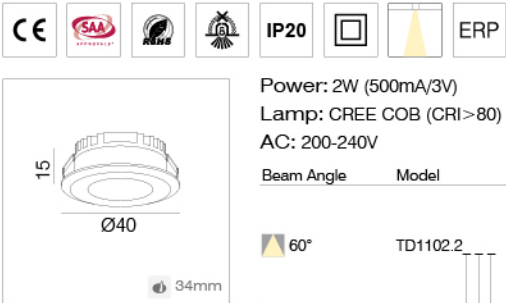


Power: 2W (500mA/3V)
Lamp: CREE COB (CRI>80)
AC: 200-240V

Beam Angle	Model	Lumen	Finish	LED Colour	LED Driver
60°	TD1102.2	80lm	1 Matt White	1 3000K	1 On and off
			2 Matt Black	2 4000K	2 Triac dimmable
			3 Silver	3 5000K	
			4 2700K		
			5 2700K		

LED Driver
LED Colour
Finish




TD1302

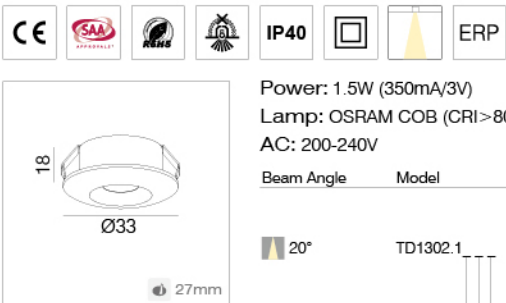

Power: 1.5W (350mA/3V)
Lamp: OSRAM COB (CRI>80)
AC: 200-240V

Beam Angle	Model	Lumen	Finish	LED Colour	LED Driver
20°	TD1302.1	92lm	1 Matt White	1 3000K	1 On and off
			2 Matt Black	2 4000K	2 Triac dimmable
			3 Silver	3 5000K	
			4 2700K		
			5 2700K		

LED Driver
LED Colour
Finish




Laura Cabinet

Led recessed down light for living rooms




TD1202

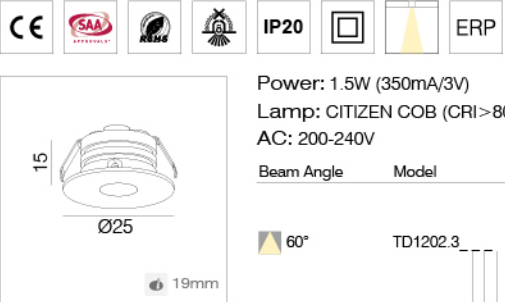


Power: 1.5W (350mA/3V)
Lamp: CITIZEN COB (CRI>80)
AC: 200-240V

Beam Angle	Model	Lumen	Finish	LED Colour	LED Driver
60°	TD1202.3	100lm	1 Matt White	1 3000K	1 On and off
			2 Matt Black	2 4000K	2 Triac dimmable
			3 Silver	3 5000K	
				5 2700K	

LED Driver
LED Colour
Finish



TD1402

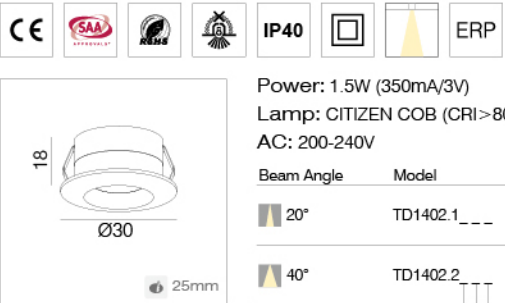

Power: 1.5W (350mA/3V)

Lamp: CITIZEN COB (CRI>80)



AC: 200-240V

Beam Angle	Model	Lumen	Finish	LED Colour	LED Driver
 20°	TD1402.1_ _ _	100lm	 1 Matt White	 1 3000K	 1 On and off
			 2 Matt Black	 2 4000K	 2 Triac dimmable
			 3 Silver	 3 5000K	
 40°	TD1402.2_ _ _	100lm		 5 2700K	


LED Driver

LED Colour

Finish




TD1602

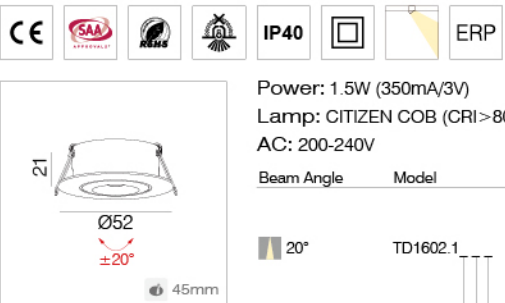

Power: 1.5W (350mA/3V)
Lamp: CITIZEN COB (CRI>80)
AC: 200-240V

Beam Angle	Model	Lumen	Finish	LED Colour	LED Driver
20°	TD1602.1	102lm	1 Matt White	1 3000K	1 On and off
			2 Matt Black	2 4000K	2 Triac dimmable
			3 Silver	3 5000K	
				5 2700K	

LED Driver
LED Colour
Finish




Laura Cabinet

Led recessed down light for living rooms




TC27033

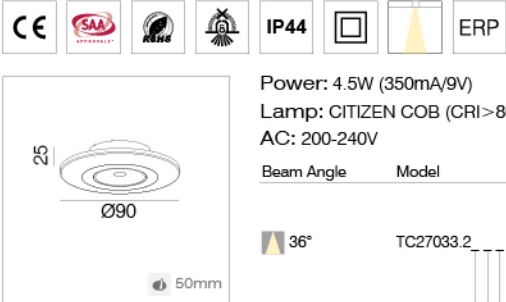


Power: 4.5W (350mA/9V)
Lamp: CITIZEN COB (CRI>80)
AC: 200-240V

Beam Angle	Model	Lumen	Finish	LED Colour	LED Driver
36°	TC27033.2	380lm	1 Matt White	1 3000K	1 On and off
			2 Matt Black	2 4000K	2 Triac dimmable
			3 Silver	3 5000K	3 1~10V dimmable
				5 2700K	4 Dali
					5 Bluetooth

LED Driver
LED Colour
Finish




TC27036

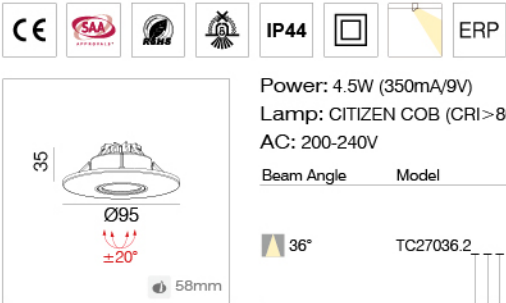

Power: 4.5W (350mA/9V)
Lamp: CITIZEN COB (CRI>80)
AC: 200-240V

Beam Angle	Model	Lumen	Finish	LED Colour	LED Driver
36°	TC27036.2	380lm	1 Matt White	1 3000K	1 On and off
			2 Matt Black	2 4000K	2 Triac dimmable
			3 Silver	3 5000K	3 1~10V dimmable
				5 2700K	4 Dali
					5 Bluetooth

LED Driver
LED Colour
Finish



Features

- 1. High efficient, energy saving, eco-friendly downlight, with latest genuine imported COB, perfectly restores the original vivid colour. Improved appearance, creates a comfortable atmosphere. Long lifespan up to 50,000 hours.
- 2. Specially designed optical system, with heightened protective diffuser, produces precise, highly efficient, natural and soft light output.
- 3. With simple and compact structure, in aerodynamics design, the heatsink made from good aluminum alloy, creates better thermal performance.
- 4. Different wattage available, for various space needs.
- 5. Optional cut out from 68mm to 145mm, IP44 protection is applicable to a special place.
- 6. Suitable for house, lounge, also commercial places like museum and gallery.

Application

Shops, hotel, etc.

Fixed



High lumen

90lm/W

50000

50000hrs

More watt (6-40W)

More sizes

IP20
IP44

IP Level

Dimmable

More CCT



TC13052
6W(520lm)
68mm

TC11072
9W(720lm)
68mm

TC32055
6W(620lm)
72-80mm

TC12107
12W(970lm)
72-80mm

DC22152
15W(1350lm)
95mm

DC22202
20W(2050lm)
95mm

DC22302
30W(3000lm)
110mm

DC22402
40W(3700lm)
145mm

Installation Manual

1

2

Cut out: XXmm

3

4

5

6




TC13052




Power: 6W (350mA/15V)
Lamp: EPISTAR COB (CRI>80)
AC: 200-240V

Beam Angle	Model	Lumen	Finish	LED Colour	LED Driver
36°	TC13052.2_	520lm	1 Matt White 2 Matt Black 3 Silver	1 3000K 2 4000K 3 5000K 4 2000K - 2800K Dim to warm 5 2700K	1 On and off 2 Triac dimmable 3 1~10V dimmable 4 Dali 5 Bluetooth
50°	TC13052.3	520lm			

LED Driver
LED Colour
Finish

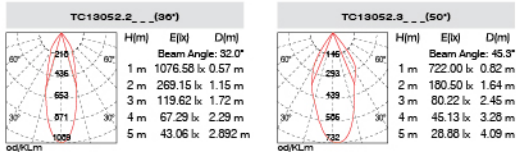


TC11072




Power: 9W (200mA/36V)
Lamp: EPISTAR COB (CRI>80)
AC: 200-240V

Beam Angle	Model	Lumen	Finish	LED Colour	LED Driver
36°	TC11072.2_	720lm	1 Matt White 2 Matt Black 3 Silver	1 3000K 2 4000K 3 5000K 4 2000K - 2800K Dim to warm 5 2700K	1 On and off 2 Triac dimmable 3 1~10V dimmable 4 Dali 5 Bluetooth
50°	TC11072.3	720lm			

LED Driver
LED Colour
Finish

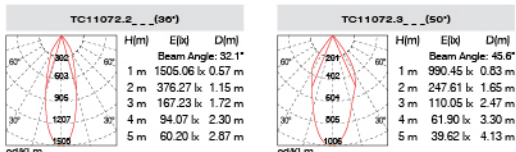


TC32055




Power: 6W (350mA/15V)
Lamp: EPISTAR COB (CRI>80)
AC: 200-240V

Beam Angle	Model	Lumen	Finish	LED Colour	LED Driver
36°	TC32055.2	620lm	1 Matt White 2 Matt Black 3 Silver	1 3000K 2 4000K 3 5000K 4 2000K - 2800K Dim to warm 5 2700K	1 On and off 2 Triac dimmable 3 1~10V dimmable 4 Dali 5 Bluetooth

LED Driver
LED Colour
Finish




TC12107



Power: 12W (260mA/36V)
Lamp: Bridgelux COB (CRI>80)
AC: 200-240V

Beam Angle	Model	Lumen	Finish	LED Colour	LED Driver
36°	TC12107.2_	970lm	1 Matt White 2 Matt Black 3 Silver	1 3000K 2 4000K 3 5000K 4 2000K - 2800K Dim to warm 5 2700K	1 On and off 2 Triac dimmable 3 1~10V dimmable 4 Dali 5 Bluetooth

LED Driver
LED Colour
Finish




DC22152




Power: 15W (350mA/36V)
Lamp: Bridgelux COB (CRI>80)
AC: 200-240V

Beam Angle	Model	Lumen	Finish	LED Colour	LED Driver
24°	DC22152.1_	1350lm	1 Matt White 2 Matt Black 3 Silver	1 3000K 2 4000K 3 5000K 4 2000K - 2800K Dim to warm 5 2700K	1 On and off 2 Triac dimmable 3 1~10V dimmable 4 Dali 5 Bluetooth
45°	DC22152.2	1350lm			

LED Driver
LED Colour
Finish

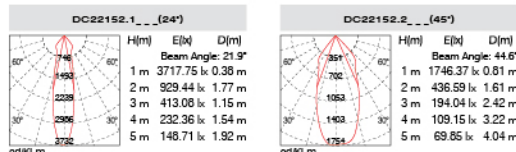


DC22202



Power: 20W (500mA/36V)
Lamp: Bridgelux COB (CRI>80)
AC: 200-240V

Beam Angle	Model	Lumen	Finish	LED Colour	LED Driver
36°	DC22202.2	2050lm	1 Matt White 2 Matt Black 3 Silver	1 3000K 2 4000K 3 5000K 4 2000K - 2800K Dim to warm 5 2700K	1 On and off 2 Triac dimmable 3 1~10V dimmable 4 Dali 5 Bluetooth

LED Driver
LED Colour
Finish




Diamont

Store & Restaurant Lighting




DC22302




Power: 30W (700mA/36V)
Lamp: Bridgelux COB (CRI>80)
AC: 200-240V

Beam Angle	Model	Lumen	Finish	LED Colour	LED Driver
60°	DC22302.3_	3000lm	1 Matt White 2 Matt Black 3 Silver	1 3000K 2 4000K 3 5000K	1 On and off 2 Triac dimmable 3 1~10V dimmable
70°	DC22302.4_	3000lm		4 2000K - 2800K Dim to warm 5 2700K	4 Dali 5 Bluetooth

LED Driver
LED Colour
Finish

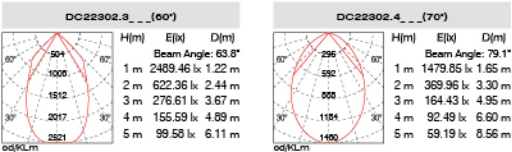


DC22402



Power: 40W (900mA/36V)
Lamp: Bridgelux COB (CRI>80)
AC: 200-240V

Beam Angle	Model	Lumen	Finish	LED Colour	LED Driver
60°	DC22402.3_	3700lm	1 Matt White 2 Matt Black 3 Silver	1 3000K 2 4000K 3 5000K	1 On and off 2 Triac dimmable 3 1~10V dimmable
70°	DC22402.4_	3700lm		4 2000K - 2800K Dim to warm 5 2700K	4 Dali 5 Bluetooth

LED Driver
LED Colour
Finish

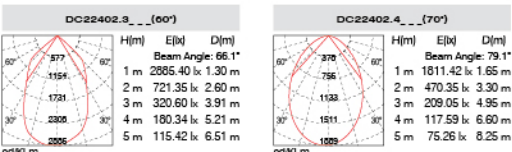

Features

- 1. High efficient, energy saving, eco-friendly downlight, with latest genuine imported COB, perfectly restores the original vivid colour. Improved appearance, creates a comfortable atmosphere. Long lifespan up to 50,000 hours.
- 2. Specially designed optical system, with heightened protective diffuser, produces precise, highly efficient, natural and soft light output.
- 3. With simple and compact structure, in aerodynamics design, the heatsink made from good aluminum alloy, creates better thermal performance.
- 4. Different wattage available, for various space needs.
- 5. Optional cut out from 68mm to 155mm, IP44 protection is applicable to a special place.
- 6. Suitable for house, lounge, also commercial places like museum and gallery.

Application

Shops, hotel, etc.

Tilttable



High lumen

90lm/W

50000

50000hrs

More watt (6-40W)

More sizes

IP20

IP Level

IP44

Dimmable

More CCT



TC31052
6W(520lm)
68mm

TC21072
9W(720lm)
68mm

TC13057
6W(620lm)
80mm

TC22106
12W(970lm)
80mm

TC81102
12W(970lm)
85-100mm

DC23152
15W(1350lm)
95mm

DC23202
20W(2050lm)
95mm

DC23302
30W(3000lm)
125mm

DC23402
40W(3700lm)
155mm

Installation Manual

1

2

Cut out: XXmm

3

4


5

6

30°




TC31052




Power: 6W (350mA/15V)
Lamp: EPISTAR COB (CRI>80)
AC: 200-240V

Beam Angle	Model	Lumen	Finish	LED Colour	LED Driver
36°	TC31052.2_	520lm	1 Matt White 2 Matt Black 3 Silver	1 3000K 2 4000K 3 5000K 4 2000K - 2800K Dim to warm 5 2700K	1 On and off 2 Triac dimmable 3 1~10V dimmable 4 Dali 5 Bluetooth
50°	TC31052.3	520lm			

LED Driver
LED Colour
Finish

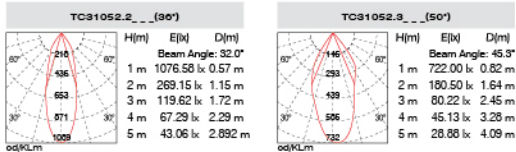


TC21072




Power: 9W (200mA/36V)
Lamp: EPISTAR COB (CRI>80)
AC: 200-240V

Beam Angle	Model	Lumen	Finish	LED Colour	LED Driver
36°	TC21072.2_	720lm	1 Matt White 2 Matt Black 3 Silver	1 3000K 2 4000K 3 5000K 4 2000K - 2800K Dim to warm 5 2700K	1 On and off 2 Triac dimmable 3 1~10V dimmable 4 Dali 5 Bluetooth
50°	TC21072.3	720lm			

LED Driver
LED Colour
Finish

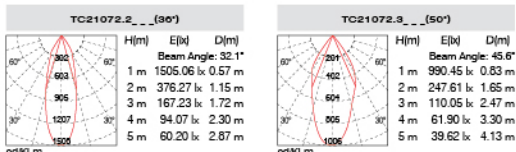


TC13057




Power: 6W (350mA/15V)
Lamp: EPISTAR COB (CRI>80)
AC: 200-240V

Beam Angle	Model	Lumen	Finish	LED Colour	LED Driver
36°	TC13057.2	620lm	1 Matt White 2 Matt Black 3 Silver	1 3000K 2 4000K 3 5000K 4 2000K - 2800K Dim to warm 5 2700K	1 On and off 2 Triac dimmable 3 1~10V dimmable 4 Dali 5 Bluetooth

LED Driver
LED Colour
Finish




TC22106




Power: 12W (260mA/36V)
Lamp: EPISTAR COB (CRI>80)
AC: 200-240V

Beam Angle	Model	Lumen	Finish	LED Colour	LED Driver
36°	TC22106.2	970lm	1 Matt White 2 Matt Black 3 Silver	1 3000K 2 4000K 3 5000K 4 2000K - 2800K Dim to warm 5 2700K	1 On and off 2 Triac dimmable 3 1~10V dimmable 4 Dali 5 Bluetooth

LED Driver
LED Colour
Finish




TC81102




Power: 12W (260mA/36V)
Lamp: Bridgelux COB (CRI>80)
AC: 200-240V

Beam Angle	Model	Lumen	Finish	LED Colour	LED Driver
36°	TC81102.2	970lm	1 Matt White 2 Matt Black 3 Silver	1 3000K 2 4000K 3 5000K 4 2000K - 2800K Dim to warm 5 2700K	1 On and off 2 Triac dimmable 3 1~10V dimmable 4 Dali 5 Bluetooth

LED Driver
LED Colour
Finish




DC23152



Power: 15W (350mA/36V)
Lamp: Bridgelux COB (CRI>80)
AC: 200-240V

Beam Angle	Model	Lumen	Finish	LED Colour	LED Driver
24°	DC23152.1	1350lm	1 Matt White 2 Matt Black 3 Silver	1 3000K 2 4000K 3 5000K 4 2000K - 2800K Dim to warm 5 2700K	1 On and off 2 Triac dimmable 3 1~10V dimmable 4 Dali 5 Bluetooth
45°	DC23152.2	1350lm			

LED Driver
LED Colour
Finish

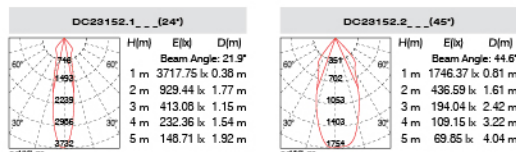


Diamont

Store & Restaurant Lighting




DC23202




Power: 20W (500mA/36V)
Lamp: Bridgelux COB (CRI>80)
AC: 200-240V

Beam Angle	Model	Lumen	Finish	LED Colour	LED Driver
36°	DC23202.2	2050lm	1 Matt White 2 Matt Black 3 Silver	1 3000K 2 4000K 3 5000K 4 2000K - 2800K Dim to warm 5 2700K	1 On and off 2 Triac dimmable 3 1~10V dimmable 4 Dali 5 Bluetooth

LED Driver
LED Colour
Finish





DC23302




Power: 30W (700mA/36V)
Lamp: Bridgelux COB (CRI>80)
AC: 200-240V

Beam Angle	Model	Lumen	Finish	LED Colour	LED Driver
60°	DC23302.3	3000lm	1 Matt White 2 Matt Black 3 Silver	1 3000K 2 4000K 3 5000K 4 2000K - 2800K Dim to warm 5 2700K	1 On and off 2 Triac dimmable 3 1~10V dimmable 4 Dali 5 Bluetooth
70°	DC23302.4	3000lm			

LED Driver
LED Colour
Finish





DC23402



Power: 40W (900mA/36V)
Lamp: Bridgelux COB (CRI>80)
AC: 200-240V

Beam Angle	Model	Lumen	Finish	LED Colour	LED Driver
60°	DC23402.3	3700lm	1 Matt White 2 Matt Black 3 Silver	1 3000K 2 4000K 3 5000K 4 2000K - 2800K Dim to warm 5 2700K	1 On and off 2 Triac dimmable 3 1~10V dimmable 4 Dali 5 Bluetooth
70°	DC23402.4	3700lm			

LED Driver
LED Colour
Finish



Features

- 1. High efficient, energy saving, eco-friendly downlight, with latest genuine imported COB, perfectly restores the original vivid colour. Improved appearance, creates a comfortable atmosphere. Long lifespan up to 50,000 hours.
- 2. Specially designed optical system, with heightened protective diffuser, produces precise, highly efficient, natural and soft light output.
- 3. With simple and compact structure, in aerodynamics design, the heatsink made from good aluminum alloy, creates better thermal performance.
- 4. Suitable for shopping malls and stores.

Application

Shops, hotel, etc.



High lumen

90lm/W

50000

50000hrs

More watt (30-50W)

Dimmable

IP20

IP Level

39° vertically

More CCT



CE

SAA

RoHS

IP20

ERP

100

39°

242 x 150

220x130mm


Power: 30W (700mA/36V)
Lamp: Bridgelux COB (CRI>80)
AC: 200-240V

Beam Angle	Model	Lumen	Finish	LED Colour	LED Driver
36°	DC3230.2_ _ _	2620lm	1 Matt White 2 Matt Black 3 Silver	1 3000K 2 4000K 3 5000K	1 On and off 2 Triac dimmable 3 1~10V dimmable
50°	DC3230.3_ _ _	2620lm		4 2000K - 2800K Dim to warm 5 2700K	4 Dali 5 Bluetooth

LED Driver

LED Colour

Finish

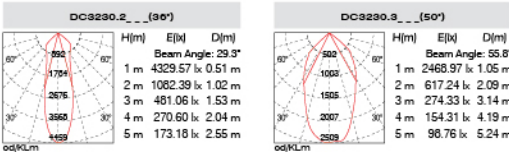

CE

SAA

RoHS

IP20

ERP

100

39°

242 x 150

220x130mm


Power: 45W (1050mA/36V)
Lamp: Bridgelux COB (CRI>80)
AC: 200-240V

Beam Angle	Model	Lumen	Finish	LED Colour	LED Driver
36°	DC3240.2_ _ _	4700lm	1 Matt White 2 Matt Black 3 Silver	1 3000K 2 4000K 3 5000K	1 On and off 2 Triac dimmable 3 1~10V dimmable
50°	DC3240.3_ _ _	4700lm		4 2000K - 2800K Dim to warm 5 2700K	4 Dali 5 Bluetooth

LED Driver

LED Colour

Finish

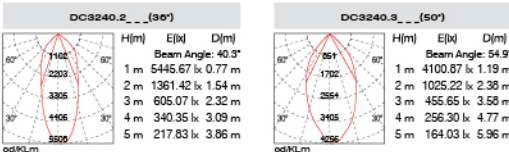

CE

SAA

RoHS

IP20

ERP

100

39°

242 x 150

220x130mm


Power: 50W (1200mA/36V)
Lamp: Bridgelux COB (CRI>80)
AC: 200-240V

Beam Angle	Model	Lumen	Finish	LED Colour	LED Driver
36°	DC3250.2_ _ _	5300lm	1 Matt White 2 Matt Black 3 Silver	1 3000K 2 4000K 3 5000K	1 On and off 2 Triac dimmable 3 1~10V dimmable
50°	DC3250.3_ _ _	5300lm		4 2000K - 2800K Dim to warm 5 2700K	4 Dali 5 Bluetooth

LED Driver


LED Colour

Finish

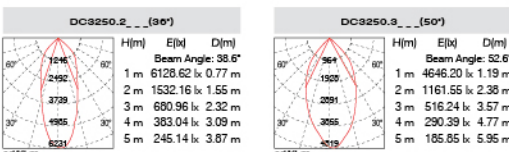




TD3430




Power: 30W (700mA/36V)
Lamp: Samsung SMD (CRI>80)
AC: 200-240V

Beam Angle	Model	Lumen	Finish	LED Colour	LED Driver
75°	TD3430.4	2920lm	1 Matt White 2 Matt Black 3 Silver	1 3000K 2 4000K 3 5000K 5 2700K	1 On and off 2 Triac dimmable 3 1~10V dimmable 4 Dali 5 Bluetooth

LED Driver
LED Colour
Finish




TD3440



Power: 45W (1050mA/36V)
Lamp: Samsung SMD (CRI>80)
AC: 200-240V

Beam Angle	Model	Lumen	Finish	LED Colour	LED Driver
75°	TD3440.4	4120lm	1 Matt White 2 Matt Black 3 Silver	1 3000K 2 4000K 3 5000K 5 2700K	1 On and off 2 Triac dimmable 3 1~10V dimmable 4 Dali 5 Bluetooth

LED Driver
LED Colour
Finish



Features

- 1. Energy saving with latest genuine imported COB, brand driver with imported IC, ensure the long life span, efficiency and energy-saving.
- 2. Die-casting heatsink made from high grade aluminum alloy, long lifespan guaranteed by advanced design of heatsink.
- 3. Customized colour available, with advanced powder coating technology, better vision and easier cleaning.
- 4. Protective PMMA diffuser at front, easier for maintenance and cleaning.
- 5. Gimbal light output design meets any directional lighting requirement.
- 6. Best for retrofit projects of conventional MR16 and AR111 lamps.

Application

Villas, clubs, stores and retail places.



High lumen

90lm/W

50000

50000hrs

More watt (0-45W)

More sizes

IP20

IP Level

30° rotation gimbal

±30°

Dimmable

More CCT



DG40072

CE

SAA

RoHS


IP20

ERP



Power: 9W (200mA/36V)
Lamp: EPISTAR COB (CRI>80)
AC: 200-240V

Beam Angle	Model	Lumen	Finish	LED Colour	LED Driver
24°	DG40072.1_ _ _	820lm	1 Matt White	1 3000K	1 On and off
45°	DG40072.2_ _ _	820lm	2 Matt Black	2 4000K	2 Triac dimmable
55°	DG40072.3_ _ _	820lm	3 Silver	3 5000K	3 1~10V dimmable
				4 2000K - 2800K Dim to warm	4 Dali
				5 2700K	5 Bluetooth

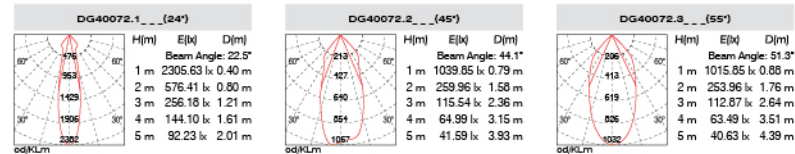

DG40102


CE

SAA

RoHS


IP20

ERP



Power: 12W (260mA/36V)
Lamp: Bridgelux COB (CRI>80)
AC: 200-240V

Beam Angle	Model	Lumen	Finish	LED Colour	LED Driver
24°	DG40102.1_ _ _	1050lm	1 Matt White	1 3000K	1 On and off
45°	DG40102.2_ _ _	1050lm	2 Matt Black	2 4000K	2 Triac dimmable
55°	DG40102.3_ _ _	1050lm	3 Silver	3 5000K	3 1~10V dimmable
				4 2000K - 2800K Dim to warm	4 Dali
				5 2700K	5 Bluetooth

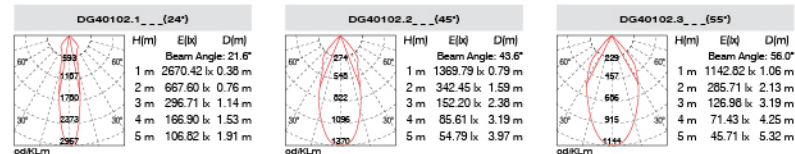

DG40152


CE

SAA

RoHS


IP20

ERP




Power: 15W (350mA/36V)
Lamp: Bridgelux COB (CRI>80)
AC: 200-240V

Beam Angle	Model	Lumen	Finish	LED Colour	LED Driver
24°	DG40152.1_ _ _	1450lm	1 Matt White	1 3000K	1 On and off
45°	DG40152.2_ _ _	1450lm	2 Matt Black	2 4000K	2 Triac dimmable
55°	DG40152.3_ _ _	1450lm	3 Silver	3 5000K	3 1~10V dimmable
				4 2000K - 2800K Dim to warm	4 Dali
				5 2700K	5 Bluetooth

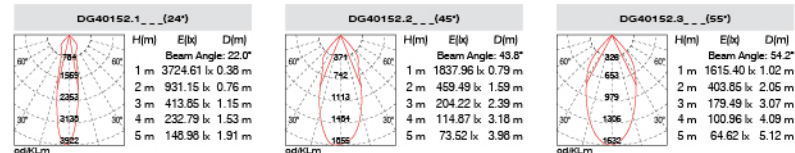




DG40142




Power: 2x9W (350mA/36V)
Lamp: EPISTAR COB (CRI>80)
AC: 200-240V

Beam Angle	Model	Lumen	Finish	LED Colour	LED Driver
25°	DG40142.1_	1440lm	1 Matt White	1 3000K	1 On and off
45°	DG40142.2_	1440lm	2 Matt Black	2 4000K	2 Triac dimmable
55°	DG40142.3_	1440lm	3 Silver	3 5000K	3 1~10V dimmable
70°	DG40142.4_	1440lm		4 2000K - 2800K Dim to warm	4 Dali
				5 2700K	5 Bluetooth

LED Driver
LED Colour
Finish

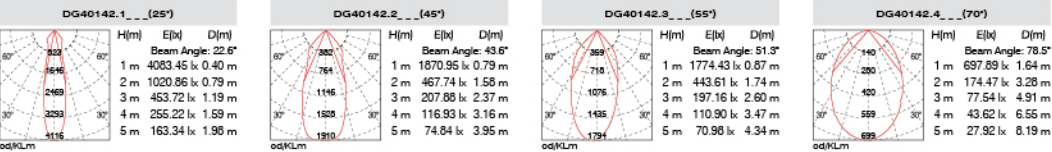


DG40202




Power: 2x12W (500mA/36V)
Lamp: Bridgelux COB (CRI>80)
AC: 200-240V

Beam Angle	Model	Lumen	Finish	LED Colour	LED Driver
25°	DG40202.1_	1940lm	1 Matt White	1 3000K	1 On and off
45°	DG40202.2_	1940lm	2 Matt Black	2 4000K	2 Triac dimmable
55°	DG40202.3_	1940lm	3 Silver	3 5000K	3 1~10V dimmable
70°	DG40202.4_	1940lm		4 2000K - 2800K Dim to warm	4 Dali
				5 2700K	5 Bluetooth

LED Driver
LED Colour
Finish

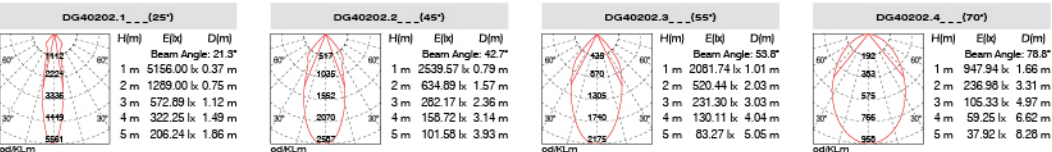


DG42302




Power: 2x15W (700mA/36V)
Lamp: Bridgelux COB (CRI>80)
AC: 200-240V

Beam Angle	Model	Lumen	Finish	LED Colour	LED Driver
25°	DG42302.1_	2820lm	1 Matt White	1 3000K	1 On and off
45°	DG42302.2_	2820lm	2 Matt Black	2 4000K	2 Triac dimmable
55°	DG42302.3_	2820lm	3 Silver	3 5000K	3 1~10V dimmable
70°	DG42302.4_	2820lm		4 2000K - 2800K Dim to warm	4 Dali
				5 2700K	5 Bluetooth

LED Driver
LED Colour
Finish

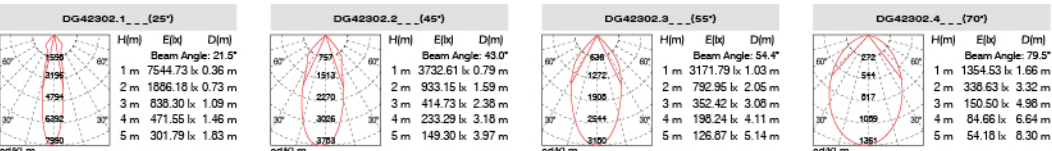


DG40212




Power: 3x9W (500mA/36V)
Lamp: EPISTAR COB (CRI>80)
AC: 200-240V

Beam Angle	Model	Lumen	Finish	LED Colour	LED Driver
25°	DG40212.1_	2080lm	1 Matt White	1 3000K	1 On and off
45°	DG40212.2_	2080lm	2 Matt Black	2 4000K	2 Triac dimmable
55°	DG40212.3_	2080lm	3 Silver	3 5000K	3 1~10V dimmable
70°	DG40212.4_	2080lm		4 2000K - 2800K Dim to warm	4 Dali
				5 2700K	5 Bluetooth

LED Driver
LED Colour
Finish

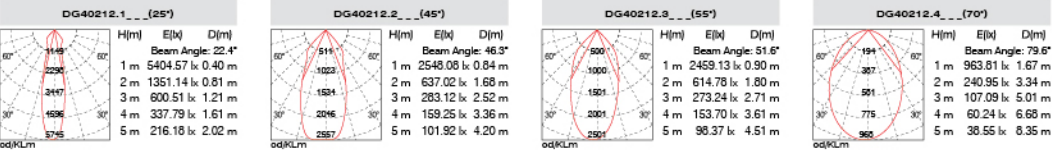


DG40302




Power: 3x12W (700mA/36V)
Lamp: Bridgelux COB (CRI>80)
AC: 200-240V

Beam Angle	Model	Lumen	Finish	LED Colour	LED Driver
25°	DG40302.1_	2800lm	1 Matt White	1 3000K	1 On and off
45°	DG40302.2_	2800lm	2 Matt Black	2 4000K	2 Triac dimmable
55°	DG40302.3_	2800lm	3 Silver	3 5000K	3 1~10V dimmable
70°	DG40302.4_	2800lm		4 2000K - 2800K Dim to warm	4 Dali
				5 2700K	5 Bluetooth

LED Driver
LED Colour
Finish

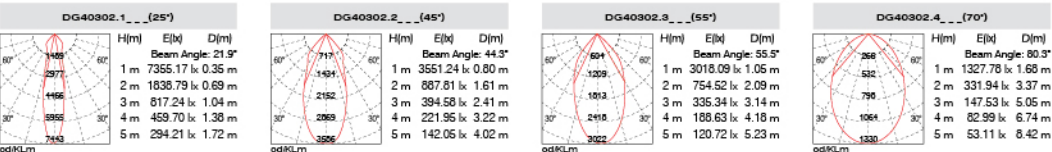


DG40452



Power: 3x15W (1050mA/36V)
Lamp: Bridgelux COB (CRI>80)
AC: 200-240V

Beam Angle	Model	Lumen	Finish	LED Colour	LED Driver
25°	DG40452.1_	4250lm	1 Matt White	1 3000K	1 On and off
45°	DG40452.2_	4250lm	2 Matt Black	2 4000K	2 Triac dimmable
55°	DG40452.3_	4250lm	3 Silver	3 5000K	3 1~10V dimmable
70°	DG40452.4_	4250lm		4 2000K - 2800K Dim to warm	4 Dali
				5 2700K	5 Bluetooth

LED Driver
LED Colour
Finish

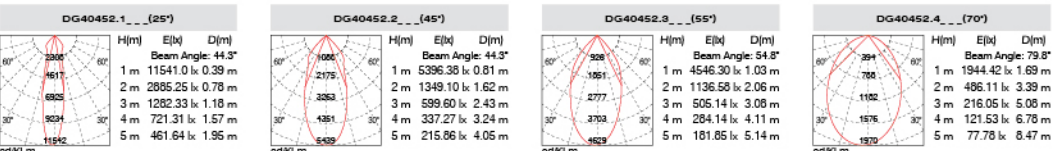



Features

- 1. Energy saving with latest genuine imported COB, brand driver with imported IC, ensure the long life span, efficiency and energy-saving.
- 2. Die-casting heatsink made from high grade aluminum alloy, long lifespan guaranteed by advanced design of heatsink.
- 3. Customized colour available, with advanced powder coating technology, better vision and easier cleaning.
- 4. Protective PMMA diffuser at front, easier for maintenance and cleaning.
- 5. Gimbal light output design meets any directional lighting requirement.
- 6. Best for retrofit projects of conventional MR16 and AR111 lamps.

Application

Villas, clubs, stores and retail places.



High lumen

90lm/W

50000

50000hrs

More watt (15-45W)

More sizes

IP20

IP Level

30° rotation gimbal

±30°

Dimmable

More CCT



TC32152

CE

SAA

RoHS

IP20

ERP

76

176 x 176

±30°

162x162mm

Power: 15W (350mA/36V)

Lamp: Bridgelux COB (CRI>80)

AC: 200-240V

Beam Angle	Model	Lumen	Finish	LED Colour	LED Driver
60°	TC32152.3	1490lm	1 Matt White 2 Matt Black 3 Silver	1 3000K 2 4000K 3 5000K 4 2000K - 2800K Dim to warm 5 2700K	1 On and off 2 Triac dimmable 3 1~10V dimmable 4 Dali 5 Bluetooth

LED Driver

LED Colour

Finish

TC32152.3_60°

H(m) E(lx) D(m)

Beam Angle: 60.0°

1m 1279 lx 1.17 m

2m 319.7 lx 2.35 m

3m 142.1 lx 3.51 m

4m 79.93 lx 4.69 m

5m 51.15 lx 5.86 m



TC32302

CE

SAA

RoHS

IP20

ERP

76

320 x 176

±30°

300x162mm

Power: 2x15W (700mA/36V)

Lamp: Bridgelux COB (CRI>80)

AC: 200-240V

Beam Angle	Model	Lumen	Finish	LED Colour	LED Driver
60°	TC32302.3	2960lm	1 Matt White 2 Matt Black 3 Silver	1 3000K 2 4000K 3 5000K 4 2000K - 2800K Dim to warm 5 2700K	1 On and off 2 Triac dimmable 3 1~10V dimmable 4 Dali 5 Bluetooth

LED Driver

LED Colour

Finish

TC32302.3_60°

H(m) E(lx) D(m)

Beam Angle: 58.7°

1m 2761 lx 1.10 m

2m 690.3 lx 2.20 m

3m 306.6 lx 3.31 m

4m 172.6 lx 4.41 m

5m 110.4 lx 5.51 m



TC32452

CE

SAA

RoHS

IP20

ERP

76

458 x 176

±30°

440x162mm

Power: 3x15W (1050mA/36V)

Lamp: Bridgelux COB (CRI>80)

AC: 200-240V

Beam Angle	Model	Lumen	Finish	LED Colour	LED Driver
60°	TC32452.3	4100lm	1 Matt White 2 Matt Black 3 Silver	1 3000K 2 4000K 3 5000K 4 2000K - 2800K Dim to warm 5 2700K	1 On and off 2 Triac dimmable 3 1~10V dimmable 4 Dali 5 Bluetooth

LED Driver

LED Colour

Finish

TC32452.3_60°

H(m) E(lx) D(m)

Beam Angle: 60.9°

1m 3831 lx 1.13 m

2m 957.4 lx 2.21 m

3m 426.1 lx 3.56 m

4m 238.3 lx 4.64 m

5m 150.5 lx 5.86 m

Features

- 1. High efficient, energy saving, eco-friendly downlight, with latest genuine imported COB, perfectly restores the original vivid colour. Improved appearance, creates a comfortable atmosphere. Long lifespan up to 50,000 hours.
- 2. Unique optical design, precise light distribution, high light efficient output, no glare, natural, soft and uniform light, by elevated transparent protective cover;
- 3. Compact, simple and elegant structure, high-quality aluminum alloy die-casting materials and perfect aerodynamic design make the heat dissipation performance of the lamp body more excellent.
- 4. A series of different wattages is optional, to meet the needs of different space illumination.
- 5. A variety of installation options, easy installation.

Application

House, museums and art galleries.





50000hrs

50000



More watt
(7-35W)



More sizes

IP Level


IP20

More CCT










Power: 7W (180mA/36V)
Lamp: CITIZEN COB (CRI>80)
AC: 200-240V


Beam Angle	Model	Lumen	Finish	LED Colour	LED Driver
20°	DC12072.1_ _ _	790lm	1 Matt White 2 Matt Black 3 Silver	1 3000K 2 4000K 3 5000K	1 On and off 2 Triac dimmable
30°	DC12072.2_ _ _	790lm			
40°	DC12072.3_ _ _	790lm		4 2000K - 2800K Dim to warm 5 2700K	

LED Driver
LED Colour
Finish

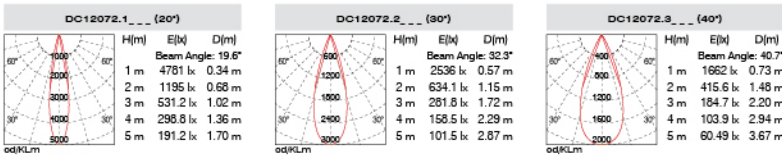







Power: 12W (300mA/36V)
Lamp: CITIZEN COB (CRI>80)
AC: 200-240V

Beam Angle	Model	Lumen	Finish	LED Colour	LED Driver
20°	DC12122.1_ _ _	1100lm	1 Matt White 2 Matt Black 3 Silver	1 3000K 2 4000K 3 5000K	1 On and off 2 Triac dimmable
30°	DC12122.2_ _ _	1100lm			
40°	DC12122.3_ _ _	1100lm		4 2000K - 2800K Dim to warm 5 2700K	

LED Driver
LED Colour
Finish

DC12122.1_ _ _ (20°)

H(m)	E(lx)	D(m)
Beam Angle: 26.6°		
1 m	4537 lx	0.47 m
2 m	1134 lx	0.94 m
3 m	504.1 lx	1.41 m
4 m	283.6 lx	1.89 m
5 m	161.5 lx	2.36 m

DC12122.2_ _ _ (30°)


H(m)	E(lx)	D(m)
Beam Angle: 32.1°		
1 m	4114 lx	0.57 m
2 m	1029 lx	1.14 m
3 m	457.2 lx	1.72 m
4 m	257.2 lx	2.29 m
5 m	164.6 lx	2.86 m

DC12122.3_ _ _ (40°)

H(m)	E(lx)	D(m)
Beam Angle: 43.8°		
1 m	2208 lx	0.80 m
2 m	552.1 lx	1.59 m
3 m	245.4 lx	2.39 m
4 m	138.0 lx	3.18 m
5 m	88.33 lx	3.99 m







Power: 20W (500mA/36V)
Lamp: CITIZEN COB (CRI>80)
AC: 200-240V

Beam Angle	Model	Lumen	Finish	LED Colour	LED Driver
20°	DC12182.1_ _ _	2000lm	1 Matt White 2 Matt Black 3 Silver	1 3000K 2 4000K 3 5000K	1 On and off 2 Triac dimmable
30°	DC12182.2_ _ _	2000lm			
40°	DC12182.3_ _ _	2000lm		4 2000K - 2800K Dim to warm 5 2700K	

LED Driver
LED Colour
Finish

DC12182.1_ _ _ (20°)

H(m)	E(lx)	D(m)
Beam Angle: 21.8°		
1 m	14840 lx	0.38 m
2 m	3710 lx	0.77 m
3 m	1649 lx	1.15 m
4 m	927.5 lx	1.53 m
5 m	583.6 lx	1.92 m

DC12182.2_ _ _ (30°)

H(m)	E(lx)	D(m)
Beam Angle: 28.1°		
1 m	10562 lx	0.50 m
2 m	2640 lx	1.00 m
3 m	1174 lx	1.49 m
4 m	660.1 lx	1.99 m
5 m	422.5 lx	2.49 m


DC12182.3_ _ _ (40°)

H(m)	E(lx)	D(m)
Beam Angle: 40.6°		
1 m	6181 lx	0.73 m
2 m	1545 lx	1.47 m
3 m	686.7 lx	2.20 m
4 m	386.3 lx	2.93 m
5 m	247.2 lx	3.67 m

246






DC12202



Power: 20W (500mA/36V)
Lamp: Bridgelux COB (CRI>80)
AC: 200-240V

Beam Angle	Model	Lumen	Finish	LED Colour	LED Driver
15°	DC12202.1_ _ _	2000lm	1 Matt White	1 3000K	1 On and off
			2 Matt Black	2 4000K	2 Triac dimmable
			3 Silver	3 5000K	
24°	DC12202.2_ _ _	2000lm		4 2000K - 2800K Dim to warm	
				5 2700K	
36°	DC12202.3_ _ _	2000lm			

LED Driver
LED Colour
Finish






DC12302




Power: 30W (700mA/15V)
Lamp: Bridgelux COB (CRI>80)
AC: 200-240V

Beam Angle	Model	Lumen	Finish	LED Colour	LED Driver
15°	DC12302.1_ _ _	2780lm	1 Matt White	1 3000K	1 On and off
			2 Matt Black	2 4000K	2 Triac dimmable
			3 Silver	3 5000K	
24°	DC12302.2_ _ _	2780lm		4 2000K - 2800K Dim to warm	
				5 2700K	
36°	DC12302.3_ _ _	2780lm			

LED Driver
LED Colour
Finish





TC38054




Power: 6W (350mA/15V)
Lamp: EPISTAR COB (CRI>80)
AC: 200-240V

Beam Angle	Model	Lumen	Finish	LED Colour	LED Driver
24°	TC38054.1_ _ _	580lm	1 Matt White	1 3000K	1 On and off
			2 Matt Black	2 4000K	2 Triac dimmable
			3 Silver	3 5000K	
36°	TC38054.2_ _ _	580lm		4 2000K - 2800K Dim to warm	
				5 2700K	

LED Driver
LED Colour
Finish






DC4105




Power: 6W (350mA/15V)
Lamp: EPISTAR COB (CRI>80)
AC: 200-240V

Beam Angle	Model	Lumen	Finish	LED Colour	LED Driver
20°	DC4105.1_ _ _	560lm	1 Matt White	1 3000K	1 On and off
			2 Matt Black	2 4000K	2 Triac dimmable
			3 Silver	3 5000K	
30°	DC4105.2_ _ _	560lm		4 2000K - 2800K Dim to warm	
				5 2700K	
45°	DC4105.3_ _ _	560lm			

LED Driver
LED Colour
Finish





DC1210



Power: 12W (260mA/36V)
Lamp: Bridgelux COB (CRI>80)
AC: 200-240V

Beam Angle	Model	Lumen	Finish	LED Colour	LED Driver
50°	DC1210.3_ _ _	1100lm	1 Matt White	1 3000K	1 On and off
			2 Matt Black	2 4000K	2 Triac dimmable
			3 Silver	3 5000K	
70°	DC1210.4_ _ _	1100lm		4 2000K - 2800K Dim to warm	
				5 2700K	

LED Driver
LED Colour
Finish




Roma

Surface Mounted Down Light





DC12152




Power: 13W (300mA/36V) Lamp: Bridgelux COB (CRI>80) AC: 200-240V					
Beam Angle	Model	Lumen	Finish	LED Colour	LED Driver
50°	DC12152.3_	1290lm	1 Matt White	1 3000K	1 On and off
			2 Matt Black	2 4000K	2 Triac dimmable
			3 Silver	3 5000K	
70°	DC12152.4_	1290lm		4 2000K - 2800K Dim to warm	
				5 2700K	

LED Driver
LED Colour
Finish




DC1225




Power: 25W (500mA/36V) Lamp: Bridgelux COB (CRI>80) AC: 200-240V					
Beam Angle	Model	Lumen	Finish	LED Colour	LED Driver
60°	DC1225.3_	2230lm	1 Matt White	1 3000K	1 On and off
			2 Matt Black	2 4000K	2 Triac dimmable
			3 Silver	3 5000K	
				4 2000K - 2800K Dim to warm	
				5 2700K	

LED Driver
LED Colour
Finish




DC1235



Power: 35W (900mA/36V) Lamp: Bridgelux COB (CRI>80) AC: 200-240V					
Beam Angle	Model	Lumen	Finish	LED Colour	LED Driver
60°	DC1235.3_	3700lm	1 Matt White	1 3000K	1 On and off
			2 Matt Black	2 4000K	2 Triac dimmable
			3 Silver	3 5000K	
				4 2000K - 2800K Dim to warm	
				5 2700K	

LED Driver
LED Colour
Finish



Features

- 1. Surface mounted design and tilting by gimbal.
- 2. With driver embedded in lamp, beautiful and easy fit to all environment. Colours available in matt white and black.

Application

Shopping mall, hotel.



High lumen

90lm/W

50000

50000hrs

IP20

IP Level

More CCT



DC22075


CE

IP20

Power: 7W (350mA/15V)
Lamp: EPISTAR COB (CRI>80)
AC: 200-240V

Beam Angle	Model	Lumen	Finish	LED Colour	LED Driver
36°	DC22075.2	620lm	1 Matt White	1 3000K	1 On and off
			2 Matt Black	2 4000K	2 Triac dimmable
			3 Silver	3 5000K	
				4 2000K - 2800K Dim to warm	
				5 2700K	

LED Driver
LED Colour
Finish



DC22145


CE

IP20

Power: 2x7W (350mA/2x15V)
Lamp: EPISTAR COB (CRI>80)
AC: 200-240V

Beam Angle	Model	Lumen	Finish	LED Colour	LED Driver
100°	DC22145.2	980lm	1 Matt White	1 3000K	1 On and off
			2 Matt Black	2 4000K	2 Triac dimmable
			3 Silver	3 5000K	
				4 2000K - 2800K Dim to warm	
				5 2700K	

LED Driver
LED Colour
Finish



Features

- 1. High efficient, energy saving, eco-friendly downlight, with latest genuine imported LED, perfectly restores the original vivid colour. Improved appearance, creates a comfortable atmosphere. Long lifespan up to 50,000 hours.
- 2. Specially designed optical system, with heightened protective diffuser, produces precise, highly efficient, natural and soft light output.
- 3. With simple and compact structure, in aerodynamics design, the heatsink made from good aluminum alloy, creates better thermal performance.
- 4. Different wattage available, for various space needs.
- 5. Sizes of cutout available from 90mm to 210mm.

Application

Shops and offices.



High lumen

90lm/W

50000

50000hrs

More watt (9-36W)

More sizes

Dimmable

More CCT



TD1009

9W(910lm)

90mm

TD2009

9W(800lm)

90mm

TD1209

9W(800lm)

93mm

TD3015

16W(1280lm)

105mm

TD1018

19W(1870lm)

140mm

TD1025

26W(2150lm)

175mm

TD1028

30W(2430lm)

195mm

TD1035

36W(3650lm)

210mm

TD1009

CE

SAA

RoHS

IP44

ERP

45

Ø106

90mm

Power: 9W (300mA/27V)

Lamp: Samsung SMD (CRI>80)

AC: 200-240V

Beam Angle	Model	Lumen	Finish	LED Colour	LED Driver
90°	TD1009.4	910lm	1 Matt White 2 Matt Black 3 Silver	1 3000K 2 4000K 3 5000K 5 2700K	1 On and off 2 Triac dimmable 3 1~10V dimmable 4 Dali 5 Bluetooth

LED Driver

LED Colour

Finish

TD2009

CE

SAA

RoHS

IP44

ERP

50

Ø106

90mm

Power: 9W (300mA/27V)

Lamp: Samsung SMD (CRI>80)

AC: 200-240V

Beam Angle	Model	Lumen	Finish	LED Colour	LED Driver
90°	TD2009.4	800lm	1 Matt White 2 Matt Black 3 Silver	1 3000K 2 4000K 3 5000K 5 2700K	1 On and off 2 Triac dimmable 3 1~10V dimmable 4 Dali 5 Bluetooth

LED Driver


LED Colour

Finish

254




TD1209




Power: 9W (300mA/27V)
Lamp: Samsung SMD (CRI>80)
AC: 200-240V

Beam Angle	Model	Lumen	Finish	LED Colour	LED Driver
90°	TD1209.4	800lm	1 Matt White	1 3000K	1 On and off
			2 Matt Black	2 4000K	2 Triac dimmable
			3 Silver	3 5000K	3 1~10V dimmable
				4 Dali	4 Dali
				5 2700K	5 Bluetooth

LED Driver
LED Colour
Finish




TD3015




Power: 16W (500mA/27V)
Lamp: Samsung SMD (CRI>80)
AC: 200-240V

Beam Angle	Model	Lumen	Finish	LED Colour	LED Driver
90°	TD3015.4	1280lm	1 Matt White	1 3000K	1 On and off
			2 Matt Black	2 4000K	2 Triac dimmable
			3 Silver	3 5000K	3 1~10V dimmable
				4 Dali	4 Dali
				5 2700K	5 Bluetooth

LED Driver
LED Colour
Finish




TD1018



Power: 19W (500mA/36V)
Lamp: Samsung SMD (CRI>80)
AC: 200-240V

Beam Angle	Model	Lumen	Finish	LED Colour	LED Driver
90°	TD1018.4	1870lm	1 Matt White	1 3000K	1 On and off
			2 Matt Black	2 4000K	2 Triac dimmable
			3 Silver	3 5000K	3 1~10V dimmable
				4 Dali	4 Dali
				5 2700K	5 Bluetooth

LED Driver
LED Colour
Finish




TD1025



Power: 26W (700mA/30V)
Lamp: Samsung SMD (CRI>80)
AC: 200-240V

Beam Angle	Model	Lumen	Finish	LED Colour	LED Driver
90°	TD1025.4	2150lm	1 Matt White	1 3000K	1 On and off
			2 Matt Black	2 4000K	2 Triac dimmable
			3 Silver	3 5000K	3 1~10V dimmable
				4 Dali	4 Dali
				5 2700K	5 Bluetooth

LED Driver
LED Colour
Finish




TD1028




Power: 30W (700mA/36V)
Lamp: Samsung SMD (CRI>80)
AC: 200-240V

Beam Angle	Model	Lumen	Finish	LED Colour	LED Driver
90°	TD1028.4	2430lm	1 Matt White	1 3000K	1 On and off
			2 Matt Black	2 4000K	2 Triac dimmable
			3 Silver	3 5000K	3 1~10V dimmable
				4 Dali	4 Dali
				5 2700K	5 Bluetooth

LED Driver
LED Colour
Finish




TD1035



Power: 36W (900mA/36V)
Lamp: Samsung SMD (CRI>80)
AC: 200-240V

Beam Angle	Model	Lumen	Finish	LED Colour	LED Driver
90°	TD1035.4	3650lm	1 Matt White	1 3000K	1 On and off
			2 Matt Black	2 4000K	2 Triac dimmable
			3 Silver	3 5000K	3 1~10V dimmable
				4 Dali	4 Dali
				5 2700K	5 Bluetooth

LED Driver
LED Colour
Finish



Features

- 1. High efficient, energy saving, eco-friendly downlight, with latest genuine imported COB, perfectly restores the original vivid colour. Improved appearance, creates a comfortable atmosphere. Long lifespan up to 50,000 hours.
- 2. Specially designed optical system, with heightened protective diffuser, produces precise, highly efficient, natural and soft light output.
- 3. With simple and compact structure, in aerodynamics design, the heatsink made from good aluminum alloy, creates better thermal performance.
- 4. Different wattage available, for various space needs.
- 5. Sizes of cutout available from 105mm to 210mm. IP44 for special area application.

Application

Office, shop.






TD10101



Power: 10W (350mA/30V)
Lamp: EPISTAR SMD (CRI>80)
AC: 200-240V

Beam Angle	Model	Lumen	Finish	LED Colour	LED Driver
100°	TD10101.4	1170lm	1 Matt White 2 Matt Black 3 Silver	1 3000K 4000K 5000K	1 On and off 2 Triac dimmable 3 1~10V dimmable 4 Dali 5 Bluetooth

LED Driver
LED Colour
Finish






TD10152



Power: 15W (480mA/30V)
Lamp: EPISTAR SMD (CRI>80)
AC: 200-240V

Beam Angle	Model	Lumen	Finish	LED Colour	LED Driver
100°	TD10152.4	1620lm	1 Matt White 2 Matt Black 3 Silver	1 3000K 4000K 5000K	1 On and off 2 Triac dimmable 3 1~10V dimmable 4 Dali 5 Bluetooth

LED Driver
LED Colour
Finish



CCT Dim

Office Lighting




TD10153




Power: 15W (370mA/36V)
Lamp: EPISTAR SMD (CRI>80)
AC: 200-240V

Beam Angle	Model	Lumen	Finish	LED Colour	LED Driver
100°	TD10153.4	1820lm	1 Matt White 2 Matt Black 3 Silver	1 3000K 4000K 5000K	1 On and off 2 Triac dimmable 3 1~10V dimmable 4 Dali 5 Bluetooth

LED Driver
LED Colour
Finish




TD10255



Power: 25W (600mA/36V)
Lamp: EPISTAR SMD (CRI>80)
AC: 200-240V

Beam Angle	Model	Lumen	Finish	LED Colour	LED Driver
100°	TD10255.4	2750lm	1 Matt White 2 Matt Black 3 Silver	1 3000K 4000K 5000K	1 On and off 2 Triac dimmable 3 1~10V dimmable 4 Dali 5 Bluetooth

LED Driver
LED Colour
Finish




CCT DimF

Office Lighting




TD10203



Power: 20W (450mA/36V)
Lamp: EPISTAR SMD (CRI>80)
AC: 200-240V

Beam Angle	Model	Lumen	Finish	LED Colour	LED Driver
100°	TD10203.4	2200lm	1 Matt White 2 Matt Black 3 Silver	1 3000K 4000K 5000K	1 On and off 2 Triac dimmable 3 1~10V dimmable 4 Dali 5 Bluetooth

LED Driver
LED Colour
Finish




TD10357



Power: 30W (700mA/36V)
Lamp: EPISTAR SMD (CRI>80)
AC: 200-240V

Beam Angle	Model	Lumen	Finish	LED Colour	LED Driver
100°	TD10357.4	3270lm	1 Matt White 2 Matt Black 3 Silver	1 3000K 4000K 5000K	1 On and off 2 Triac dimmable 3 1~10V dimmable 4 Dali 5 Bluetooth

LED Driver
LED Colour
Finish





Features

- 1. High anti-glare, UGR<18.
- 2. Very competitive price with reliable quality.
- 3. Easy to replace 6 inch and 8 inch traditional fluorescent tube down lamps.
- 4. CCT changing of 3000K/ 4000K/5000K or Turnable white of 2700-6000K.

Application

Office, shop.



High lumen

100lm/W

50000

50000hrs

More watt (15-18W)

More sizes

Dimmable

More CCT



TD33153


CE

SAA

RoHS

IP20


ERP



Power: 15W (300mA/36V)
Lamp: Bridgelux SMD (CRI>80)
AC: 200-240V

Beam Angle	Model	Lumen	Finish	LED Colour	LED Driver
60°	TD33153.3	1300lm	1 Matt White 2 Matt Black	1 3000K 4000K 5000K	1 On and off 2 Triac dimmable 3 1~10V dimmable 4 Dali 5 Bluetooth

LED Driver
LED Colour
Finish



TD33184


CE

SAA

RoHS

IP20


ERP



Power: 18W (450mA/36V)
Lamp: Bridgelux SMD (CRI>80)
AC: 200-240V

Beam Angle	Model	Lumen	Finish	LED Colour	LED Driver
60°	TD33184.3	1800lm	1 Matt White 2 Matt Black	1 3000K 4000K 5000K	1 On and off 2 Triac dimmable 3 1~10V dimmable 4 Dali 5 Bluetooth

LED Driver
LED Colour
Finish






Features

- 1. Using high precision die-cast aluminum for physical heat dissipation to ensure the long life of lamps, flicker free drive, comply with CE, SAA, and UKCA.
- 2. Extremely thin, suitable for all kinds of ceilings.
- 3. The light output is as delicate and soft as the moonlight, high anti-glare.
- 4. Surface and recessed mounted ,more size series design optional .

Application

Shops and offices.

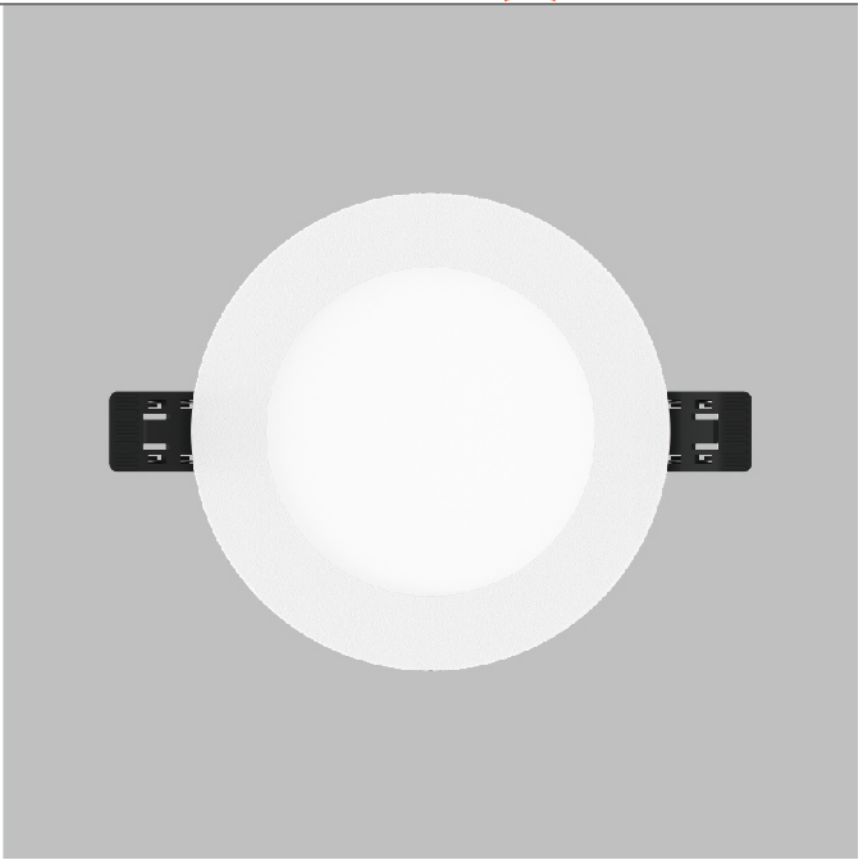

High lumen

90lm/W

50000

50000hrs

More watt (6-18W)

More sizes

Dimmable

More CCT



TD33062
6W(500lm)
105mm

TD33122
12W(1000lm)
155mm

TD33182
18W(1500lm)
205mm

TD33063
6W(500lm)
105×105mm


TD33123
12W(1000lm)
155×155mm

TD33183
18W(1500lm)
205×205mm


Panel CCT changing



Office Lighting





TD33062

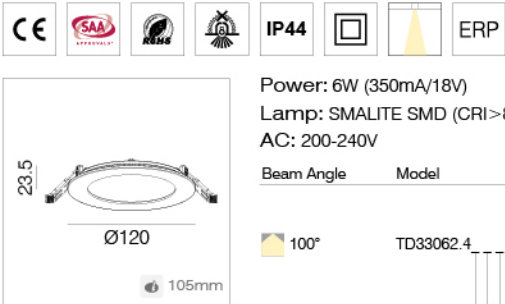


Power: 6W (350mA/18V)
Lamp: SMALITE SMD (CRI>80)
AC: 200-240V

Beam Angle	Model	Lumen	Finish	LED Colour	LED Driver
100°	TD33062.4	500lm	1 Matt White 2 Matt Black	1 3000K-4000K	1 On and off 2 Triac dimmable 3 1~10V dimmable 4 Dali 5 Bluetooth

LED Driver
LED Colour
Finish





TD33122

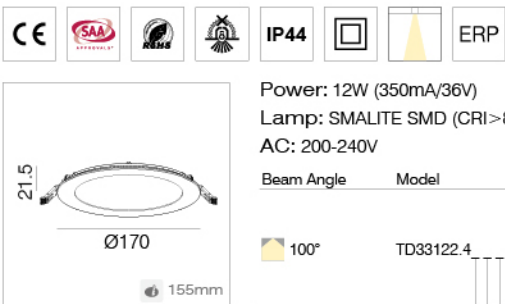


Power: 12W (350mA/36V)
Lamp: SMALITE SMD (CRI>80)
AC: 200-240V

Beam Angle	Model	Lumen	Finish	LED Colour	LED Driver
100°	TD33122.4	1000lm	1 Matt White 2 Matt Black	1 3000K-4000K	1 On and off 2 Triac dimmable 3 1~10V dimmable 4 Dali 5 Bluetooth

LED Driver
LED Colour
Finish




TD33182

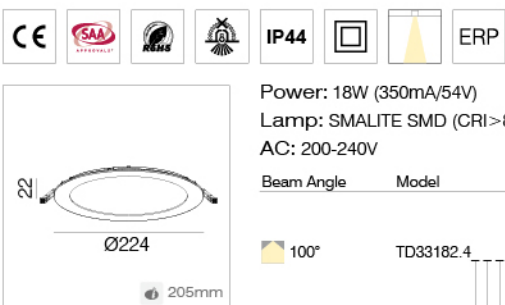

Power: 18W (350mA/54V)
Lamp: SMALITE SMD (CRI>80)
AC: 200-240V


Beam Angle	Model	Lumen	Finish	LED Colour	LED Driver
100°	TD33182.4	1500lm	1 Matt White 2 Matt Black	1 3000K-4000K	1 On and off 2 Triac dimmable 3 1~10V dimmable 4 Dali 5 Bluetooth

LED Driver
LED Colour
Finish




Panel CCT changing

Office Lighting





TD33063

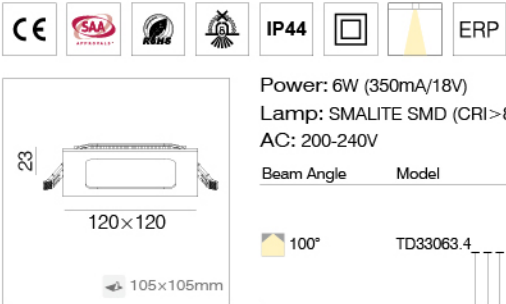


Power: 6W (350mA/18V)
Lamp: SMALITE SMD (CRI>80)
AC: 200-240V

Beam Angle	Model	Lumen	Finish	LED Colour	LED Driver
100°	TD33063.4	500lm	1 Matt White 2 Matt Black	1 3000K-4000K	1 On and off 2 Triac dimmable 3 1~10V dimmable 4 Dali 5 Bluetooth

LED Driver
LED Colour
Finish





TD33123

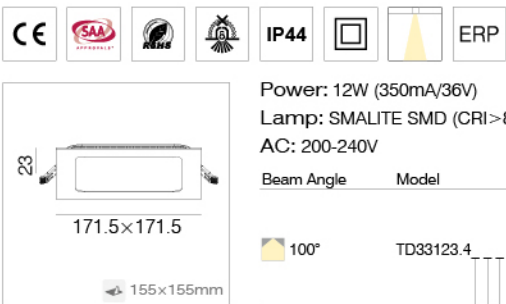


Power: 12W (350mA/36V)
Lamp: SMALITE SMD (CRI>80)
AC: 200-240V

Beam Angle	Model	Lumen	Finish	LED Colour	LED Driver
100°	TD33123.4	1000lm	1 Matt White 2 Matt Black	1 3000K-4000K	1 On and off 2 Triac dimmable 3 1~10V dimmable 4 Dali 5 Bluetooth

LED Driver
LED Colour
Finish




TD33183

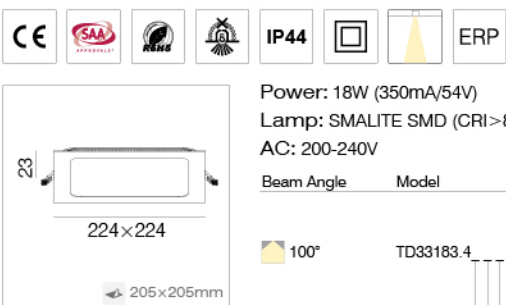

Power: 18W (350mA/54V)
Lamp: SMALITE SMD (CRI>80)
AC: 200-240V

Beam Angle	Model	Lumen	Finish	LED Colour	LED Driver
100°	TD33183.4	1500lm	1 Matt White 2 Matt Black	1 3000K-4000K	1 On and off 2 Triac dimmable 3 1~10V dimmable 4 Dali 5 Bluetooth

LED Driver
LED Colour
Finish






Features

- 1. Using high precision die-cast aluminum for physical heat dissipation to ensure the long life of lamps, flicker free drive, comply with CE, SAA, and UKCA.
- 2. Extremely thin, suitable for all kinds of ceilings.
- 3. The light output is as delicate and soft as the moonlight, high anti-glare.
- 4. Surface and recessed mounted ,more size series design optional .

Application

Shops and offices.

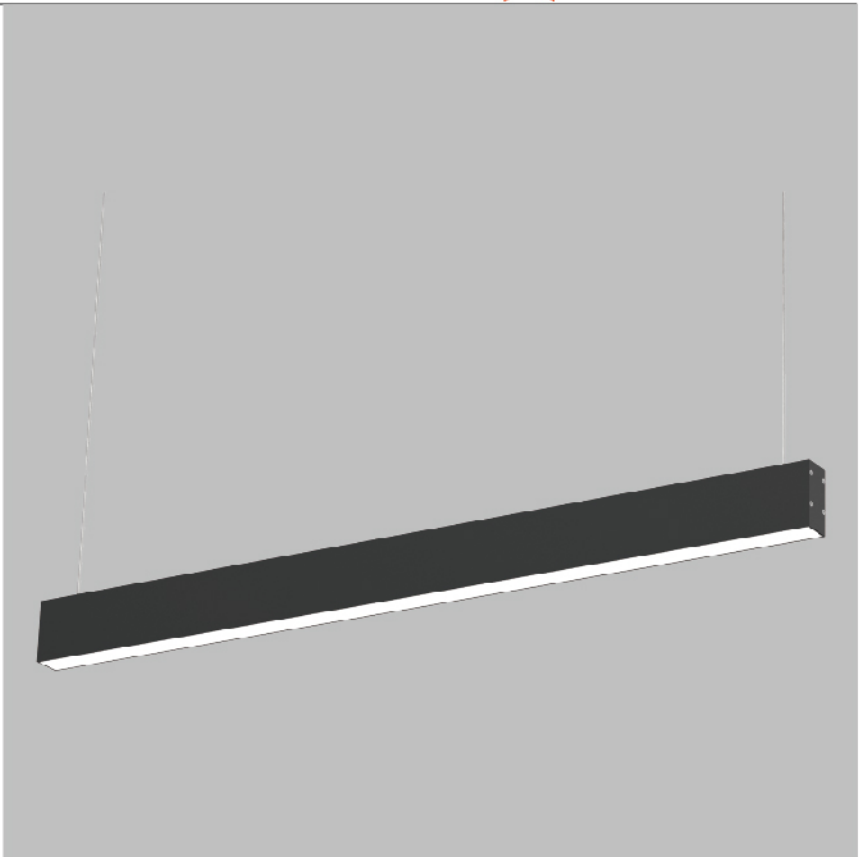

High lumen

90lm/W







50000hrs


More watt (6-18W)

More sizes


Dimmable

More CCT

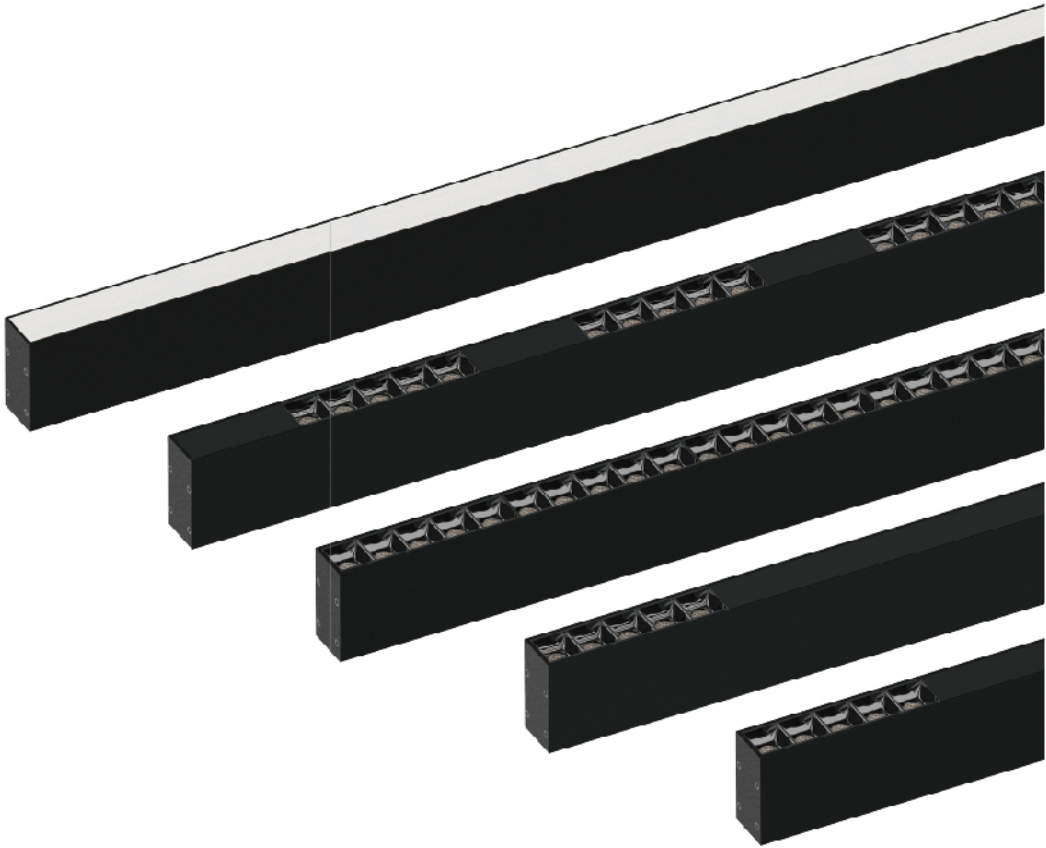





TC38301




Power: 30W (900mA/30V)
Lamp: OSRAM SMD (CRI>80)
AC: 200-240V

Beam Angle	Model	Lumen	Finish	LED Colour	LED Driver
			1 Matt White	1 2700K	1 On and off
			2 Matt Black	2 3000K	2 Triac dimmable
				3 4000K	3 1-10V dimmable
					4 Dali
					5 Bluetooth

LED Driver
LED Colour
Finish




TC38401




Power: 40W (1050mA/30V)
Lamp: OSRAM SMD (CRI>80)
AC: 200-240V

Beam Angle	Model	Lumen	Finish	LED Colour	LED Driver
			1 Matt White	1 2700K	1 On and off
			2 Matt Black	2 3000K	2 Triac dimmable
				3 4000K	3 1-10V dimmable
					4 Dali
					5 Bluetooth

LED Driver
LED Colour
Finish





TC38402




Power: 40W (1050mA/30V)
Lamp: OSRAM SMD (CRI>80)
AC: 200-240V

Beam Angle	Model	Lumen	Finish	LED Colour	LED Driver
			1 Matt White	1 2700K	1 On and off
			2 Matt Black	2 3000K	2 Triac dimmable
				3 4000K	3 1-10V dimmable
					4 Dali
					5 Bluetooth

LED Driver
LED Colour
Finish




TC38403




Power: 40W (1050mA/30V)
Lamp: OSRAM SMD (CRI>80)
AC: 200-240V

Beam Angle	Model	Lumen	Finish	LED Colour	LED Driver
			1 Matt White	1 2700K	1 On and off
			2 Matt Black	2 3000K	2 Triac dimmable
				3 4000K	3 1-10V dimmable
					4 Dali
					5 Bluetooth

LED Driver
LED Colour
Finish




TC38404



Power: 40W (1050mA/30V)
Lamp: OSRAM SMD (CRI>80)
AC: 200-240V

Beam Angle	Model	Lumen	Finish	LED Colour	LED Driver
			1 Matt White	1 2700K	1 On and off
			2 Matt Black	2 3000K	2 Triac dimmable
				3 4000K	3 1-10V dimmable
					4 Dali
					5 Bluetooth

LED Driver
LED Colour
Finish





FIRE RATED RECESSED DOWN LIGHT

90min. 60min. 30min

Beautiful and aesthetically pleasing design with steel frame, which ensures both structural stability and durability, achieves an impressive 90 minutes fire rating.

IP 65 protection and a bezel which is freely interchangeable included.

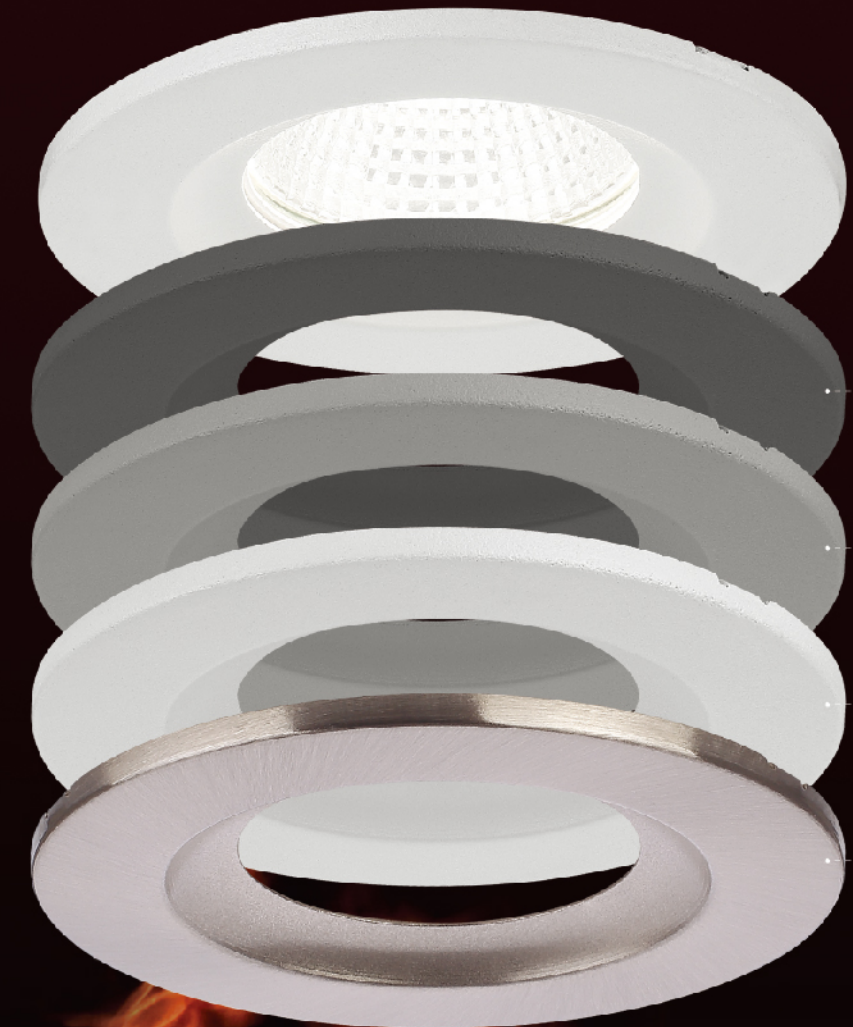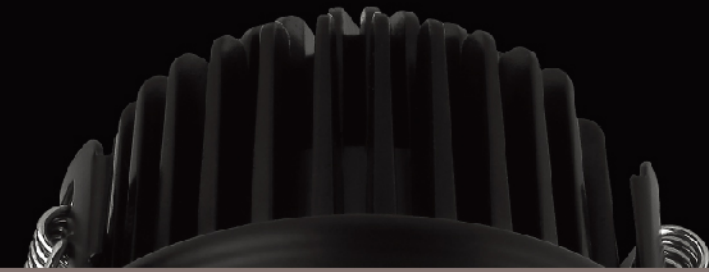

..... Matt Black

..... Silver

..... Matt White


..... Satin Chrome

Chrome
Golden
and more to come
at your request.






TC27056




Power: 6W (350mA/15V)
Lamp: EPISTAR COB (CRI>80)
AC: 200-240V

Beam Angle	Model	Lumen	Finish	LED Colour	LED Driver
40°	TC27056.3	650lm	1 Matt White 2 Matt Black 3 Silver	1 3000K 2 4000K 3 5000K 4 2000K - 2800K Dim to warm 5 2700K	1 On and off 2 Triac dimmable 3 1~10V dimmable 4 Dali 5 Bluetooth

LED Driver
LED Colour
Finish




TC40055




Power: 4.5W (350mA/9V)
Lamp: EPISTAR COB (CRI>80)
AC: 200-240V

Beam Angle	Model	Lumen	Finish	LED Colour	LED Driver
40°	TC40055.3	400lm	1 Matt White 2 Matt Black 3 Silver	1 3000K 2 4000K 3 5000K 5 2700K	1 On and off 2 Triac dimmable 3 1~10V dimmable 4 Dali 5 Bluetooth

LED Driver
LED Colour
Finish




TC26094




Power: 9W (200mA/36V)
Lamp: EPISTAR COB (CRI>80)
AC: 200-240V

Beam Angle	Model	Lumen	Finish	LED Colour	LED Driver
40°	TC26094.3	790lm	1 Matt White 2 Matt Black 3 Silver	1 3000K 2 4000K 3 5000K 4 2000K - 2800K Dim to warm 5 2700K	1 On and off 2 Triac dimmable 3 1~10V dimmable 4 Dali 5 Bluetooth

LED Driver
LED Colour
Finish




TC36072



Power: 6W (350mA/15V)
Lamp: EPISTAR COB (CRI>80)
AC: 200-240V

Beam Angle	Model	Lumen	Finish	LED Colour	LED Driver
40°	TC36072.3	690lm	1 Matt White 2 Matt Black 3 Silver	1 3000K 2 4000K 3 5000K 4 2000K - 2800K Dim to warm 5 2700K	1 On and off 2 Triac dimmable 3 1~10V dimmable 4 Dali 5 Bluetooth


LED Driver
LED Colour
Finish








TC33037




Power: 6W (350mA/15V)
Lamp: EPISTAR COB (CRI>80)
AC: 200-240V

Beam Angle	Model	Lumen	Finish	LED Colour	LED Driver
36°	TC33037.2	600lm	1 Matt White 2 Matt Black 3 Silver	1 3000K 2 4000K 3 5000K 4 2000K - 2800K Dim to warm 5 2700K	1 On and off 2 Triac dimmable 3 1~10V dimmable 4 Dali 5 Bluetooth

LED Driver
LED Colour
Finish




TC33038




Power: 6W (350mA/15V)
Lamp: EPISTAR COB (CRI>80)
AC: 200-240V

Beam Angle	Model	Lumen	Finish	LED Colour	LED Driver
40°	TC33038.3	650lm	1 Matt White 2 Matt Black 3 Silver	1 3000K 2 4000K 3 5000K 4 2000K - 2800K Dim to warm 5 2700K	1 On and off 2 Triac dimmable 3 1~10V dimmable 4 Dali 5 Bluetooth

LED Driver
LED Colour
Finish




TC32039




Power: 4.5W (350mA/9V)
Lamp: EPISTAR COB (CRI>80)
AC: 200-240V

Beam Angle	Model	Lumen	Finish	LED Colour	LED Driver
36°	TC32039.2	420lm	1 Matt White 2 Matt Black 3 Silver	1 3000K 2 4000K 3 5000K 4 2000K - 2800K Dim to warm 5 2700K	1 On and off 2 Triac dimmable 3 1~10V dimmable 4 Dali 5 Bluetooth

LED Driver
LED Colour
Finish




TC32031




Power: 4.5W (350mA/9V)
Lamp: EPISTAR COB (CRI>80)
AC: 200-240V

Beam Angle	Model	Lumen	Finish	LED Colour	LED Driver
36°	TC32031.2	420lm	1 Matt White 2 Matt Black 3 Silver	1 3000K 2 4000K 3 5000K 4 2000K - 2800K Dim to warm 5 2700K	1 On and off 2 Triac dimmable 3 1~10V dimmable 4 Dali 5 Bluetooth

LED Driver
LED Colour
Finish




TC33092




Power: 9W (200mA/36V)
Lamp: EPISTAR COB (CRI>80)
AC: 200-240V

Beam Angle	Model	Lumen	Finish	LED Colour	LED Driver
36°	TC33092.2	800lm	1 Matt White 2 Matt Black 3 Silver	1 3000K 2 4000K 3 5000K 4 2000K - 2800K Dim to warm 5 2700K	1 On and off 2 Triac dimmable 3 1~10V dimmable 4 Dali 5 Bluetooth

LED Driver
LED Colour
Finish




TC33093



Power: 9W (200mA/36V)
Lamp: EPISTAR COB (CRI>80)
AC: 200-240V


Beam Angle	Model	Lumen	Finish	LED Colour	LED Driver
36°	TC33093.2	800lm	1 Matt White 2 Matt Black 3 Silver	1 3000K 2 4000K 3 5000K 4 2000K - 2800K Dim to warm 5 2700K	1 On and off 2 Triac dimmable 3 1~10V dimmable 4 Dali 5 Bluetooth

LED Driver
LED Colour
Finish






TC70062




Power: 6W (350mA/15V)
Lamp: EPISTAR COB (CRI>80)
AC: 200-240V

Beam Angle	Model	Lumen	Finish	LED Colour	LED Driver
36°	TC70062.2	650lm	1 Matt White 2 Matt Black 3 Silver	1 3000K 2 4000K 3 5000K 4 2000K - 2800K Dim to warm 5 2700K	1 On and off 2 Triac dimmable 3 1~10V dimmable 4 Dali 5 Bluetooth

LED Driver
LED Colour
Finish




TC80065



Power: 6W (350mA/15V)
Lamp: EPISTAR COB (CRI>80)
AC: 200-240V


Beam Angle	Model	Lumen	Finish	LED Colour	LED Driver
40°	TC80065.3	690lm	1 Matt White 2 Matt Black 3 Silver	1 3000K 2 4000K 3 5000K 4 2000K - 2800K Dim to warm 5 2700K	1 On and off 2 Triac dimmable 3 1~10V dimmable 4 Dali 5 Bluetooth

LED Driver
LED Colour
Finish







TC8607




Power: 9W (200mA/36V)
Lamp: EPISTAR COB (CRI>80)
AC: 200-240V

Beam Angle	Model	Lumen	Finish	LED Colour	LED Driver
36°	TC8607.2_---	740lm	1 Matt White 2 Matt Black 3 Silver	1 3000K 2 4000K 3 5000K	1 On and off 2 Triac dimmable 3 1~10V dimmable
50°	TC8607.3_---	740lm		4 2000K - 2800K Dim to warm 5 2700K	4 Dali 5 Bluetooth

LED Driver
LED Colour
Finish





TC8610




Power: 12W (260mA/36V)
Lamp: Bridgelux COB (CRI>80)
AC: 200-240V

Beam Angle	Model	Lumen	Finish	LED Colour	LED Driver
36°	TC8610.2_---	940lm	1 Matt White 2 Matt Black 3 Silver	1 3000K 2 4000K 3 5000K	1 On and off 2 Triac dimmable 3 1~10V dimmable
50°	TC8610.3_---	940lm		4 2000K - 2800K Dim to warm 5 2700K	4 Dali 5 Bluetooth

LED Driver
LED Colour
Finish




TC8107



Power: 9W (200mA/36V)
Lamp: EPISTAR COB (CRI>80)
AC: 200-240V

Beam Angle	Model	Lumen	Finish	LED Colour	LED Driver
36°	TC8107.2_---	740lm	1 Matt White 2 Matt Black 3 Silver	1 3000K 2 4000K 3 5000K	1 On and off 2 Triac dimmable 3 1~10V dimmable
				4 2000K - 2800K Dim to warm 5 2700K	4 Dali 5 Bluetooth

LED Driver
LED Colour
Finish




TC8110



Power: 12W (260mA/36V)
Lamp: Bridgelux COB (CRI>80)
AC: 200-240V

Beam Angle	Model	Lumen	Finish	LED Colour	LED Driver
36°	TC8110.2_---	910lm	1 Matt White 2 Matt Black 3 Silver	1 3000K 2 4000K 3 5000K	1 On and off 2 Triac dimmable 3 1~10V dimmable
				4 2000K - 2800K Dim to warm 5 2700K	4 Dali 5 Bluetooth

LED Driver
LED Colour
Finish





TC8507



Power: 9W (200mA/36V)
Lamp: EPISTAR COB (CRI>80)
AC: 200-240V

Beam Angle	Model	Lumen	Finish	LED Colour	LED Driver
36°	TC8507.2_---	650lm	1 Matt White 2 Matt Black 3 Silver	1 3000K 2 4000K 3 5000K	1 On and off 2 Triac dimmable 3 1~10V dimmable
50°	TC8507.3_---	650lm		4 2000K - 2800K Dim to warm 5 2700K	4 Dali 5 Bluetooth

LED Driver
LED Colour
Finish





TC8510



Power: 12W (260mA/36V)
Lamp: Bridgelux COB (CRI>80)
AC: 200-240V

Beam Angle	Model	Lumen	Finish	LED Colour	LED Driver
36°	TC8510.2_---	890lm	1 Matt White 2 Matt Black 3 Silver	1 3000K 2 4000K 3 5000K	1 On and off 2 Triac dimmable 3 1~10V dimmable
50°	TC8510.3_---	890lm		4 2000K - 2800K Dim to warm 5 2700K	4 Dali 5 Bluetooth

LED Driver
LED Colour
Finish



Classic

Fire Rated Lighting





TC8707



Power: 9W (200mA/36V)
Lamp: EPISTAR COB (CRI>80)
AC: 200-240V

Beam Angle	Model	Lumen	Finish	LED Colour	LED Driver
36°	TC8707.2_---	570lm	1 Matt White 2 Matt Black 3 Silver	1 3000K 2 4000K 3 5000K	1 On and off 2 Triac dimmable 3 1~10V dimmable
55°	TC8707.3_---	570lm		4 2000K - 2800K Dim to warm 5 2700K	4 Dali 5 Bluetooth

LED Driver
LED Colour
Finish





TC8710




Power: 12W (260mA/36V)
Lamp: Bridgelux COB (CRI>80)
AC: 200-240V

Beam Angle	Model	Lumen	Finish	LED Colour	LED Driver
36°	TC8710.2_---	690lm	1 Matt White 2 Matt Black 3 Silver	1 3000K 2 4000K 3 5000K	1 On and off 2 Triac dimmable 3 1~10V dimmable
50°	TC8710.3_---	690lm		4 2000K - 2800K Dim to warm 5 2700K	4 Dali 5 Bluetooth

LED Driver
LED Colour
Finish





TC4707



Power: 9W (200mA/36V)
Lamp: EPISTAR COB (CRI>80)
AC: 200-240V

Beam Angle	Model	Lumen	Finish	LED Colour	LED Driver
36°	TC4707.2_---	680lm	1 Matt White 2 Matt Black 3 Silver	1 3000K 2 4000K 3 5000K	1 On and off 2 Triac dimmable 3 1~10V dimmable
50°	TC4707.3_---	680lm		4 2000K - 2800K Dim to warm 5 2700K	4 Dali 5 Bluetooth

LED Driver
LED Colour
Finish




Fire Rated Lighting

Classic





TC4710




Power: 12W (260mA/36V)
Lamp: Bridgelux COB (CRI>80)
AC: 200-240V

Beam Angle	Model	Lumen	Finish	LED Colour	LED Driver
36°	TC4710.2_---	950lm	1 Matt White 2 Matt Black 3 Silver	1 3000K 2 4000K 3 5000K	1 On and off 2 Triac dimmable 3 1~10V dimmable
50°	TC4710.3_---	950lm		4 2000K - 2800K Dim to warm 5 2700K	4 Dali 5 Bluetooth

LED Driver
LED Colour
Finish




TC4807




Power: 9W (200mA/36V)
Lamp: EPISTAR COB (CRI>80)
AC: 200-240V

Beam Angle	Model	Lumen	Finish	LED Colour	LED Driver
36°	TC4807.2_---	710lm	1 Matt White 2 Matt Black 3 Silver	1 3000K 2 4000K 3 5000K	1 On and off 2 Triac dimmable 3 1~10V dimmable
				4 2000K - 2800K Dim to warm 5 2700K	4 Dali 5 Bluetooth

LED Driver
LED Colour
Finish




TC4810



Power: 12W (260mA/36V)
Lamp: EPISTAR COB (CRI>80)
AC: 200-240V


Beam Angle	Model	Lumen	Finish	LED Colour	LED Driver
36°	TC4810.2_---	940lm	1 Matt White 2 Matt Black 3 Silver	1 3000K 2 4000K 3 5000K	1 On and off 2 Triac dimmable 3 1~10V dimmable
				4 2000K - 2800K Dim to warm 5 2700K	4 Dali 5 Bluetooth

LED Driver
LED Colour
Finish







DG3007




Power: 9W (200mA/36V)
Lamp: EPISTAR COB (CRI>80)
AC: 200-240V

Beam Angle	Model	Lumen	Finish	LED Colour	LED Driver
36°	DG3007.2_	700lm	1 Matt White 2 Matt Black 3 Silver	1 3000K 2 4000K 3 5000K 4 2000K - 2800K Dim to warm 5 2700K	1 On and off 2 Triac dimmable 3 1~10V dimmable 4 Dali 5 Bluetooth
50°	DG3007.3_	700lm			

LED Driver
LED Colour
Finish





DG3010




Power: 12W (260mA/36V)
Lamp: Bridgelux COB (CRI>80)
AC: 200-240V

Beam Angle	Model	Lumen	Finish	LED Colour	LED Driver
36°	DG3010.2_	900lm	1 Matt White 2 Matt Black 3 Silver	1 3000K 2 4000K 3 5000K 4 2000K - 2800K Dim to warm 5 2700K	1 On and off 2 Triac dimmable 3 1~10V dimmable 4 Dali 5 Bluetooth
50°	DG3010.3_	900lm			

LED Driver
LED Colour
Finish





TC7307




Power: 9W (200mA/36V)
Lamp: EPISTAR COB (CRI>80)
AC: 200-240V

Beam Angle	Model	Lumen	Finish	LED Colour	LED Driver
36°	TC7307.2_	700lm	1 Matt White 2 Matt Black 3 Silver	1 3000K 2 4000K 3 5000K 4 2000K - 2800K Dim to warm 5 2700K	1 On and off 2 Triac dimmable 3 1~10V dimmable 4 Dali 5 Bluetooth
50°	TC7307.3_	700lm			

LED Driver
LED Colour
Finish





TC7310



Power: 12W (260mA/36V)
Lamp: Bridgelux COB (CRI>80)
AC: 200-240V

Beam Angle	Model	Lumen	Finish	LED Colour	LED Driver
36°	TC7310.2_	900lm	1 Matt White 2 Matt Black 3 Silver	1 3000K 2 4000K 3 5000K 4 2000K - 2800K Dim to warm 5 2700K	1 On and off 2 Triac dimmable 3 1~10V dimmable 4 Dali 5 Bluetooth
50°	TC7310.3_	900lm			

LED Driver
LED Colour
Finish





Features

- 1. High efficiency, energy saving, eco-friendly stair lamps, with latest genuine imported LED, perfectly restores the original vivid colour. Improved appearance, creates a comfortable atmosphere. Long lifespan up to 50,000 hours.
- 2. Unique optical design, accurate light distribution, low glare, natural light, soft and even, high light transmission protective cover;
- 3. Compact structure, simple and generous, high-quality aluminum alloy die-casting material and perfect aerodynamic design make the heat dissipation performance of the lamp body better. Different light types can match more scenes.
- 4.DC10**-DC11** series, with built-in embedded box, perfect mounting surface of sticking box.

Application

Stairs indoor



CE

IP44

ERP



83
Ø80
70mm


Power: 3W (650mA/3V)
Lamp: EPISTAR COB (CRI>80)
AC: 200-240V

Beam Angle	Model	Lumen	Finish	LED Colour	LED Driver
45°	DC1003.2	80lm	☐ 1 Matt White	☐ 1 3000K	
			☒ 2 Matt Black	☐ 2 4000K	
			☐ 3 Silver	☐ 3 5000K	
				☐ 5 2700K	

LED Driver

LED Colour

Finish



DC1003.2_ (45°)

H(m)	E(lx)	D(m)
Beam Angle: 38.0°		
1 m	164.51 lx	0.68 m
2 m	41.13 lx	1.36 m
3 m	18.28 lx	2.03 m
4 m	10.28 lx	2.71 m
5 m	6.58 lx	3.39 m


DC1003



CE

IP44

ERP



83
80 x 80
70mm


Power: 3W (650mA/3V)
Lamp: EPISTAR COB (CRI>80)
AC: 200-240V

Beam Angle	Model	Lumen	Finish	LED Colour	LED Driver
45°	DC1103.2	80lm	☐ 1 Matt White	☐ 1 3000K	
			☒ 2 Matt Black	☐ 2 4000K	
			☐ 3 Silver	☐ 3 5000K	
				☐ 5 2700K	

LED Driver

LED Colour

Finish



DC1103.2_ (45°)

H(m)	E(lx)	D(m)
Beam Angle: 41.0°		
1 m	139.34 lx	0.70 m
2 m	34.83 lx	1.40 m
3 m	15.46 lx	2.09 m
4 m	8.71 lx	2.79 m
5 m	5.57 lx	3.49 m


DC1103



CE

IP20

ERP



28
Ø45
40mm


Power: 3W (650mA/3V)
Lamp: EPISTAR COB (CRI>80)
AC: 200-240V

Beam Angle	Model	Lumen	Finish	LED Colour	LED Driver
50°	TD2203.2	90lm	☐ 1 Matt White	☐ 1 3000K	
			☒ 2 Matt Black	☐ 2 4000K	
			☐ 3 Silver	☐ 3 5000K	
				☐ 5 2700K	

LED Driver

LED Colour

Finish



TD2203.2_ (50°)

H(m)	E(lx)	D(m)
Beam Angle: 48.1°		
1 m	50.05 lx	0.95 m
2 m	12.51 lx	1.90 m
3 m	5.56 lx	2.85 m
4 m	3.13 lx	3.80 m
5 m	2.00 lx	4.76 m


TD2203



CE

IP20

ERP



28
45 x 45
40mm


Power: 3W (650mA/3V)
Lamp: EPISTAR COB (CRI>80)
AC: 200-240V

Beam Angle	Model	Lumen	Finish	LED Colour	LED Driver
70°	TD2303.2	80lm	☐ 1 Matt White	☐ 1 3000K	
			☒ 2 Matt Black	☐ 2 4000K	
			☐ 3 Silver	☐ 3 5000K	
				☐ 5 2700K	

LED Driver

LED Colour

Finish



TD2303.2_ (70°)

H(m)	E(lx)	D(m)
Beam Angle: 48.1°		
1 m	50.05 lx	0.95 m
2 m	12.51 lx	1.90 m
3 m	5.56 lx	2.85 m
4 m	3.13 lx	3.80 m
5 m	2.00 lx	4.76 m

TD2303



Model	Page
DC1003	291
DC1103	292
DC11101	038
DC12052	120
DC12072	246
DC12073	112
DC1210	248
DC12102	120
DC12122	246
DC12123	112
DC12152	249
DC12182	246
DC12183	112
DC12202	247
DC1225	249
DC12283	113
DC12302	247
DC1235	249
DC21101	038
DC21202	150
DC21203	155
DC21302	150
DC21402	150
DC22014	183
DC22021	183
DC22026	184
DC22028	184
DC22039	185
DC22052	185
DC22073	183
DC22075	252
DC22133	184
DC22145	252
DC22152	224
DC22202	224
DC22302	225
DC22402	225
DC23152	230
DC23202	231
DC23302	231
DC23402	231
DC2430	209
DC2440	209
DC31101	038
DC3230	234
DC3240	234
DC3250	234
DC39101	054
DC39102	052
DC39181	054
DC39182	052
DC4105	248
DG-001	025
DG-002	025
DG-003	026
DG-004	025
DG-005	025
DG-006	025
DG-007	025
DG-008	025
DG-009	025
DG-010	025
DG-011	025
DG-012	025
DG-013	025
DG-014	026
DG-020	024

Model	Page
DG-021	024
DG-022	024
DG-023	024
DG-066	024
DG-067	024
DG-068	024
DG-069	024
DG-095	026
DG-096	026
DG-097	026
DG-098	026
DG-099	026
DG-100	026
DG-101	026
DG-105	019
DG-106	019
DG-107	019
DG-108	019
DG-109	019
DG-110	019
DG-111	021
DG11101	028
DG11102	029
DG11103	032
DG11104	033
DG-112	021
DG-113	021
DG-114	021
DG-115	021
DG-116	021
DG-117	021
DG-118	022
DG-119	022
DG-120	022
DG-121	022
DG-122	022
DG-123	022
DG-124	022
DG14052	060
DG14102	060
DG14202	093
DG14302	093
DG14402	093
DG21101	028
DG21102	029
DG21103	032
DG21104	033
DG30051	088
DG30052	116
DG30053	088
DG30054	063
DG30055	074
DG3007	287
DG30075	074
DG30081	066
DG30091	116
DG30092	123
DG30093	088
DG3010	287
DG30104	063
DG30122	063
DG30125	075
DG30131	117
DG30132	123
DG30133	089
DG30154	089
DG30155	117

Model	Page
DG30156	123
DG30161	066
DG30184	064
DG30185	075
DG30204	089
DG30205	117
DG30206	124
DG30252	064
DG30285	075
DG30304	090
DG30305	118
DG30306	124
DG30311	066
DG30404	090
DG30405	118
DG30406	124
DG31035	057
DG31055	057
DG31075	078
DG31076	082
DG31081	068
DG31101	028
DG31102	029
DG31103	032
DG31104	057
DG31125	078
DG31126	082
DG31155	058
DG31161	068
DG31185	079
DG31186	083
DG31202	097
DG31205	058
DG31285	079
DG31286	083
DG31302	097
DG31305	058
DG31311	068
DG31402	097
DG31452	098
DG33081	070
DG33111	070
DG33161	070
DG34001	100
DG3414	205
DG3421	205
DG36108	171
DG36109	172
DG36111	173
DG36112	174
DG36208	172
DG36209	172
DG36211	174
DG36212	174
DG39101	044
DG39102	046
DG39103	040
DG39104	042
DG39181	044
DG39182	046
DG39183	040
DG39184	042
DG40072	238
DG40102	238
DG40142	239
DG40152	238
DG40202	239

Model	Page
DG40212	240
DG40302	240
DG40452	240
DG42302	239
DG51104	033
TC11035	201
TC11036	212
TC11055	201
TC11072	223
TC11101	036
TC12035	202
TC12055	202
TC12107	224
TC13052	223
TC13057	229
TC20033	216
TC20035	216
TC20038	216
TC21035	201
TC21036	212
TC21055	202
TC21072	229
TC21101	036
TC22035	203
TC22055	203
TC22106	230
TC24071	195
TC24072	195
TC24073	196
TC24074	195
TC24075	189
TC24076	189
TC24077	190
TC24078	190
TC25053	180
TC25054	176
TC25101	180
TC25153	180
TC26094	275
TC27033	220
TC27036	220
TC27052	203
TC27056	275
TC27072	204
TC28073	176
TC28153	176
TC30031	107
TC30055	102
TC30056	107
TC30061	108
TC30075	102
TC30125	102
TC30126	107
TC30185	103
TC30246	108
TC30285	103
TC31031	212
TC31052	229
TC31101	036
TC32031	280
TC32039	279
TC32055	223
TC32071	189
TC32072	189
TC32073	190
TC32074	190

Model	Page
TC32152	244
TC32302	244
TC32452	244
TC33037	279
TC33038	279
TC33092	280
TC33093	280
TC36022	159
TC36023	161
TC36024	163
TC36042	161
TC36043	163
TC36063	159
TC36072	276
TC36102	161
TC36103	163
TC36106	169
TC36107	170
TC36123	159
TC36163	160
TC36202	162
TC36203	160
TC36205	164
TC36206	170
TC36207	170
TC36302	162
TC36303	164
TC37055	167
TC37122	167
TC37152	167
TC37202	165
TC37203	168
TC37302	165
TC37362	168
TC37402	165
TC37403	168
TC37602	166
TC38054	248
TC38301	271
TC38401	271
TC38402	271
TC38403	272
TC38404	272
TC39101	048
TC39102	050
TC39181	048
TC39182	050
TC40055	275
TC4707	285
TC4710	286
TC4807	286
TC4810	286
TC53052	138
TC53073	138
TC53103	138
TC54153	141
TC54154	143
TC54155	142
TC54156	144
TC54203	141
TC54204	143
TC54205	142
TC54206	144
TC54303	141
TC54304	143
TC54305	142
TC54306	144

Model	Page
TC58073	130
TC58074	131
TC58075	133
TC58076	134
TC58077	132
TC58078	135
TC58103	130
TC58104	131
TC58105	133
TC58106	134
TC58107	132
TC58108	135
TC58153	130
TC58154	131
TC58155	133
TC58156	134
TC58157	132
TC58158	135
TC60102	177
TC61102	177
TC62102	177
TC66073	205
TC68051	149
TC68052	154
TC68054	151
TC68055	156
TC68101	149
TC68102	154
TC68104	151
TC68105	156
TC68151	149
TC68152	155
TC68154	151
TC68155	156
TC70062	281
TC7307	287
TC7310	288
TC80065	281
TC8107	283
TC8110	284
TC81102	230
TC8507	284
TC8510	284
TC8607	283
TC8610	283
TC8707	285
TC8710	285
TC88078	208
TC8809	208
TC8815	208
TC89054	204
TC89074	204
TC9110	198
TC9410	191
TC95102	191
TC9515	198
TD1002	218
TD1003	213
TD10033	217
TD1009	254
TD10101	258
TD10152	258
TD10153	259
TD1018	255
TD10203	260
TD1025	256
TD10255	259

TD1028	256
TD1035	256
TD10357	260
TD1102	218
TD1202	219
TD1209	255
TD1302	218
TD1402	219
TD1602	219
TD2003	217
TD2009	254
TD2103	217
TD2203	292
TD2303	292
TD3003	213
TD3015	255
TD33062	265
TD33063	266
TD33122	265
TD33123	266
TD33153	262
TD33182	265
TD33183	266
TD33184	262
TD3430	235
TD3440	235
TD6003	213